

# Lensed Trunking System



High efficiency lensed trunking system with multiple optic options including asymmetric and double asymmetric. Linkable to create seamless lines of light. Quick release optics and heatsink to allow for flexibility in environment.

## Physical

**Housing** Extruded aluminium  
**Optics** PMMA lens  
**Finish** Silver, White  
**Mounting type** Surface mounted, Suspended

## Electrical

**Voltage and Current** 27-40V, 950-1800mA  
**Control** Non-dimmable, 1-10V, DALI


## Certification

**Warranty** 5 years  
**Category** IP40  
AS/NZS 60598.2.1  
TM21 report on request


## Optical

**Beam angle** 30°, 60°, 90°, Asymmetrical 30°, Double Asymmetrical 2x30°  
**CCT** 3000, 4000, 5000K  
**CRI** 80, 90  
**UGR (90°)** >19  
**UGR (30°, 60°, Asym, Double Asym)** < 19  
**Efficiency** 130lm/W


BEAM ANGLE 30°

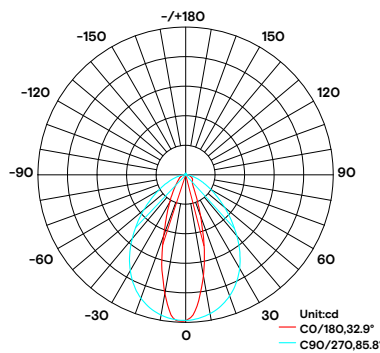


BEAM ANGLE 60°

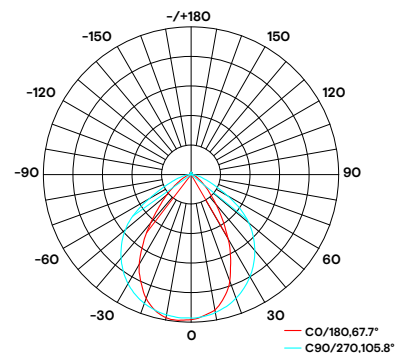


BEAM ANGLE 90°

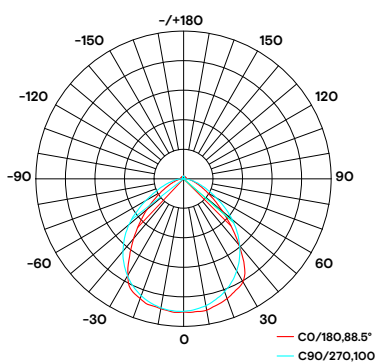

ASYMMETRIC 30°

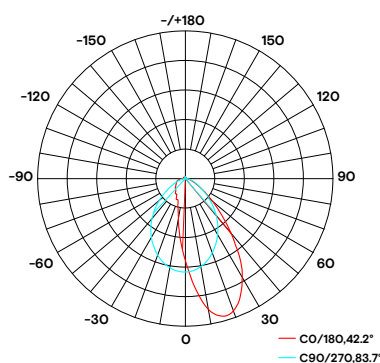

DOUBLE ASYMMETRIC 30°

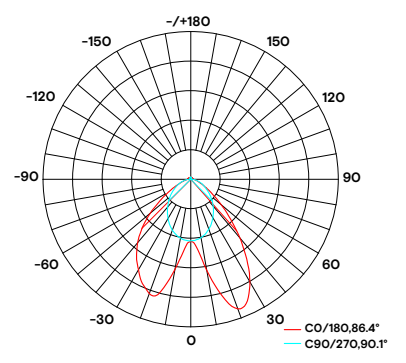

SKU	Wattage	Lumen Output	Dimensions LxWxH mm	Technical Drawing	
G40BTL	40W	5200lm	1182 x 65 x 65		
G60BTL	60W	7800lm	1475 x 65 x 65		
G80BTL	80W	10400lm	1475 x 65 x 65		

SKU	Accessories
GBT-SC	Straight Connector
GBT-SUS	Suspension Kit 1m

### SKU Builder

Use our SKU Builder below to create custom codes from our range.

	Series	Wattage	Type	Product Descriptor	Trim Finish	CRI	CCT	Beam Angle	Control
SKU CODE	<b>G</b> Grace	<b>40</b> 40W	<b>BT</b> Trunking Batten	<b>L</b> Lensed	<b>S</b> Silver	<b>8</b> 80 CRI	<b>3</b> 3000K	<b>30</b> 30°	<b>N</b> Non-Dim
		<b>60</b> 60W			<b>W</b> White	<b>9</b> 90 CRI	<b>4</b> 4000K	<b>60</b> 60°	<b>D10</b> 1-10V
		<b>80</b> 80W			↑	↑	<b>5</b> 5000K	<b>90</b> 90°	<b>DA</b> DALI
		↑					↑	<b>A</b> Asym	↑
								<b>2A</b> Double Asym	↑