

Reflector Downlight



Regulations

To ensure correct functionality and safety please read instructions carefully before using this product. This luminaire complies with AS/NZS 60598.2.1, AS/NZS 60598.2.2A. All wiring and installation of this luminaire must adhere to local and national wiring rules e.g. AS/NZS 3000:2007 Amendment 2:2012 Electrical Installation.

Tips

1. Always ensure power is off and the fitting has cooled down before performing any maintenance or adjustment to the fitting
2. To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power

3. Handle the fitting with care to avoid breakage
4. Find a suitable location away from liquids or hazards
5. To clean, wipe with a damp clean cloth. Never soak the fitting with water.


Note: Please check fitting label to see if fitting is dimmable and if so which type of dimming.

Warning


1. Switch off power before installation
2. Switch on only after complete installation and examination of the circuit
3. Only a qualified electrician can install and maintain this fitting
4. Product modification and/or improper installation will void warranty.

Installation


A. Make a cut out in accordance with cut out size in schedule.




B. Open the terminal block cover by levering upwards.



C. Connect the luminaire to power by inserting power cable into quick connect block. Make sure power cable is being gripped firmly.



D. Close the terminal block cover.

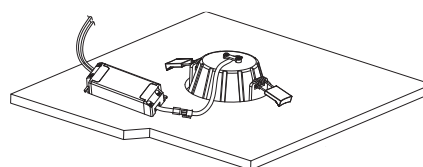

E. Hold back spring clips then push luminaire into the hole.

F. Make sure the luminaire is fixed firmly to the ceiling.



RoHS



CE

IP54

grace

Model	Dimensions LxWxH mm	Cutout D mm	Power (W)	CCT (K)	IP	Voltage (AC)	Control
G6DF	110 x 70	90-95	6	3000, 4000, 5000	54	220-240V 50,60Hz	Non-dim
G6DS	110 x 70	90-95	6	3000, 4000, 5000	54	220-240V 50,60Hz	Non-dim
G8DO	110 x 70	90-95	8	3000, 4000, 5000	54	220-240V 50,60Hz	Non-dim
G13DF	145 x 82	125-135	13	3000, 4000, 5000	54	220-240V 50,60Hz	Triac, 1-10V
G13DS	145 x 82	125-135	13	3000, 4000, 5000	54	220-240V 50,60Hz	Triac, 1-10V
G13DO	145 x 82	125-135	13	3000, 4000, 5000	54	220-240V 50,60Hz	Triac, 1-10V
G18DF	172 x 95	150-165	18	3000, 4000, 5000	54	220-240V 50,60Hz	Triac, 1-10V, DALI
G18DS	172 x 95	150-165	18	3000, 4000, 5000	54	220-240V 50,60Hz	Triac, 1-10V, DALI
G18DO	172 x 95	150-165	18	3000, 4000, 5000	54	220-240V 50,60Hz	Triac, 1-10V, DALI
G25DF	228 x 98	200-210	25	3000, 4000, 5000	54	220-240V 50,60Hz	Triac, 1-10V, DALI
G25DS	228 x 98	200-210	25	3000, 4000, 5000	54	220-240V 50,60Hz	Triac, 1-10V, DALI
G25DO	228 x 98	200-210	25	3000, 4000, 5000	54	220-240V 50,60Hz	Triac, 1-10V, DALI
G10TD	105 x 72	90-95	10	3000, 4000, 5000	40	220-240V 50,60Hz	Triac, 1-10V, DALI