

Trunking Systems



Regulations

To ensure correct functionality and safety please read instructions carefully before using this product. This luminaire complies with AS/NZS 60598.2.1. All wiring and installation of this luminaire must adhere to local and national wiring rules e.g. AS/NZS 3000:2007 Amendment 2:2012 Electrical Installation.

Tips


1. Always ensure power is off and the fitting has cooled down before performing any maintenance or adjustment to the fitting
 2. To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power
 3. Handle the fitting with care to avoid breakage
 4. Find a suitable location away from liquids or hazards
 5. To clean, wipe with a damp clean cloth. Never soak the fitting with water.
- Note: Please check fitting label to see if fitting is dimmable and if so which type of dimming.**

Warning


1. Switch off power before installation
2. Switch on only after complete installation and examination of the circuit
3. Only a qualified electrician can install and maintain this fitting
4. Product modification and/or improper installation will void warranty.

Surface Mounted Installation


A.

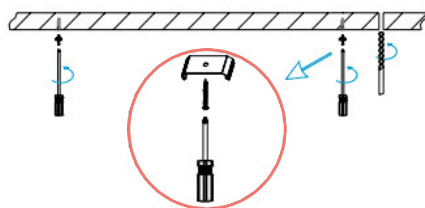

B.

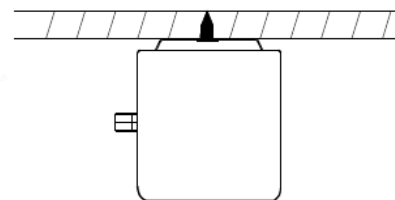

C.

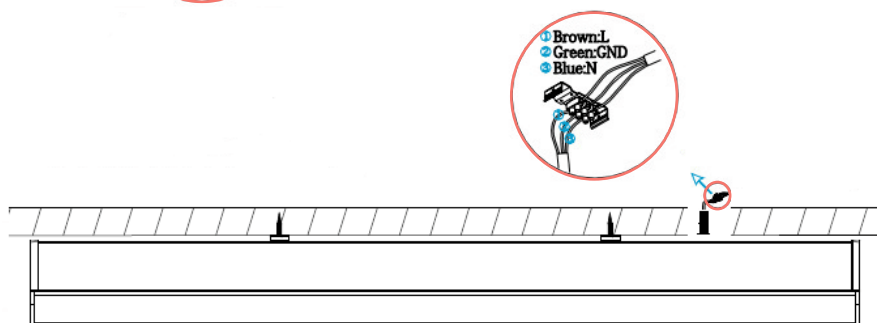

Suspended Installation

A. Drill two 5.5mm holes (A). Recommended distance between the holes is 950mm (can be adjusted if needed to fit ceiling structure)

B. Drive the ceiling anchor (B) into the ceiling

C. Install the suspension kit onto the ceiling


D. Adjust the height of the suspension kits to the correct height for the application.
Make sure these are level

E. Slide the suspension mount nut into the channel

F. Fasten the nut

G. Connect fitting to power

F. Drill fixing holes.

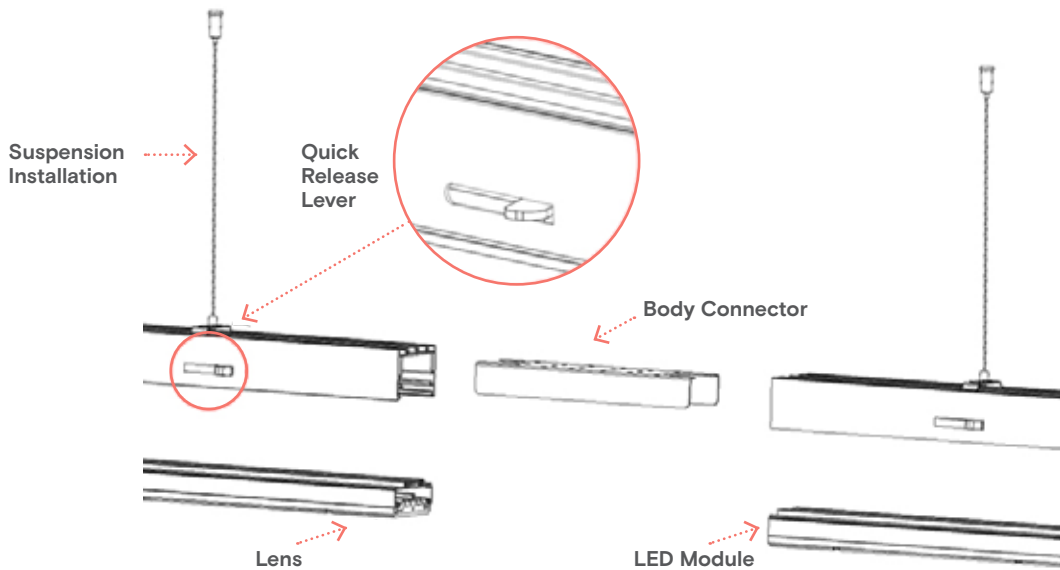

Model	Dimensions LxWxH mm	Power (W)	CCT (K)	IP	Voltage (AC)	Control
G40BTO	1196 x 56.5 x 66.5	40	3000, 4000, 5000	40	220-240V 50,60Hz	Non-dim, 1-10V, DALI
G50BTO	1496 x 56.5 x 66.5	50	3000, 4000, 5000	40	220-240V 50,60Hz	Non-dim, 1-10V, DALI
G60BTO	1496 x 56.5 x 66.5	60	3000, 4000, 5000	40	220-240V 50,60Hz	Non-dim, 1-10V, DALI
G40BTL	1182 x 65 x 65	40	3000, 4000, 5000	40	220-240V 50,60Hz	Non-dim, 1-10V, DALI
G60BTL	1475 x 65 x 65	60	3000, 4000, 5000	40	220-240V 50,60Hz	Non-dim, 1-10V, DALI
G80BTL	1475 x 65 x 65	80	3000, 4000, 5000	40	220-240V 50,60Hz	Non-dim, 1-10V, DALI