

Opal Trunking System



A seamless linkable trunking system allows for flexibility in application. High efficiency using PMMA Opal diffuser for greater visual comfort. Quick release heat sink allows for easy installation of seamless linear lines or replacement of components. Multiple dimming types available.

Physical

Housing Extruded aluminium
Optics PMMA diffuser
Finish Silver, White
Mounting Type Surface mounted,
Suspended

Electrical

Voltage and Current
27-40V, 950-1500mA
Control Non-dimmable, 1-10V,
DALI


Certification

Warranty 5 years
Category IP40
AS/NZS 60598.2.1
TM21 report on request

Optical

Beam angle 150°
CCT 3000, 4000, 5000K
CRI 80, 90
UGR > 19
Efficiency 110-120lm/W

RoHS

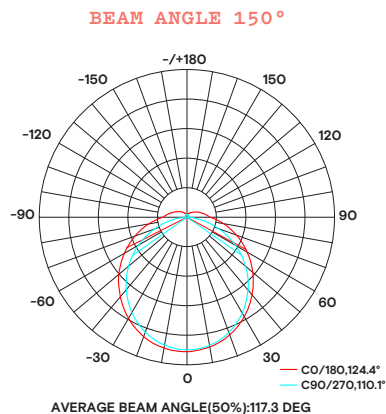

SKU	Wattage	Lumen Output	Dimensions LxWxH mm	Technical Drawing	
G4OBTO	40W	4400-4800lm	1196 x 56.5 x 66.5		
G5OBTO	50W	5500-6000lm	1496 x 56.5 x 66.5		
G6OBTO	60W	6600-7000lm	1496 x 56.5 x 66.5		

SKU	Accessories
GBT-SC	Straight Connector
GBT-SUS	Suspension Kit 1m

SKU Builder

Use our SKU Builder below to create custom codes from our range.

	Series	Wattage	Type	Product Descriptor	Trim Finish	CRI	CCT	Beam Angle	Control
SKU CODE	G Grace	40 40W	BT Trunking Batten	O Opal	S Silver	8 80 CRI	3 3000K	150 150°	N Non-Dim
		50 50W			W White	9 90 CRI	4 4000K		D10 1-10V
		60 60W			↑	↑	5 5000K		DA DALI
		↑					↑		↑