

Prismatic Panel



The Prismatic Panel is an ultra high-efficiency LED panel producing 127lm/W. Prismatic optics deliver an impressive UGR<19 rating. Comes with a variety of accessories to allow for recessing, surface mounting and suspension. Ideal for spaces looking for a high level of visual comfort and efficiency whilst retaining a traditional troffer look.

Physical

Housing ADC12 aluminium
Optics Prismatic PMMA
Finish White
Mounting Type Recessed, Surface mounted, Suspended

Electrical

Voltage and Current 25-42V, 750-1500mA
Control Non-dimmable, 1-10V, DALI

Certification


Warranty 5 years
Category IP44
AS/NZS 60598.2.1
AS/NZS 60598.2.2A
TM21 report on request

Optical

Beam angle 120°
CCT 2700, 3000, 4000, 5000 6500K
CRI 80, 90
UGR < 19
Efficiency 127lm/W



RoHS

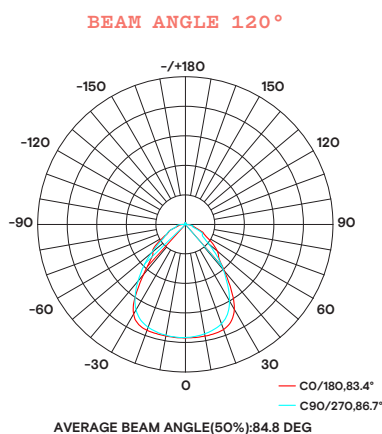

SKU	Wattage	Lumen Output	Dimensions LxWxH mm	Cutout LxW mm	Technical Drawing	
G30PS	30W	3800lm	595 x 595 x 10	580 x 580		
G30PM	30W	3800lm	1195 x 295 x 10	1180 x 282		
G50PL	50W	6300lm	1195 x 595 x 10	1180 x 580		

SKU	Accessories
G30/50P-SUS	Suspension Kit
G30/50P-RCK	Recessed Kit (Plasterboard)
G30PSSM, G30PMSM, G50PLSM	Surface Mount Kit

SKU Builder

Use our SKU Builder below to create custom codes from our range.

	Series	Wattage	Type	Product Descriptor	Trim Finish	CRI	CCT	Beam Angle	Control
SKU CODE	G Grace	30 30W	PS Panel Small 595x595	- Prismatic	W White	8 80 CRI	27 2700K	120 120°	N Non-Dim
		50 50W	PM Panel Medium 1195x295			9 90 CRI	3 3000K		D10 1-10V
		↑	PL Panel Large 1195x595			↑	4 4000K		DA DALI
			↑				5 5000K		↑
							65 6500K		↑
							↑		