

Reflector Downlight



High efficiency, low glare and IP54 rated to suit most commercial applications. The Reflector Downlight has multiple reflector options including specular, faceted and opal. Allows for freedom to specify based on a range of aesthetic and performance requirements.

Physical

Housing ADC12 aluminium
Optics PMMA
Trim finish White
Reflector finish Specular, Faceted
Mounting type Recessed

Electrical





Voltage and Current 15-74V, 110-720mA
Control Non-dimmable, Triac, 1-10V, DALI

Certification

Warranty 5 years
Category IP54
 AS/NZS 60598.2.1
 AS/NZS 60598.2.2A
 TM21 report on request

Optical

Beam angle 60°, 90°
CCT 3000, 4000, 5000K
CRI 80, 90
UGR > 19 except Specular 60°
Efficiency 88-107lm/W

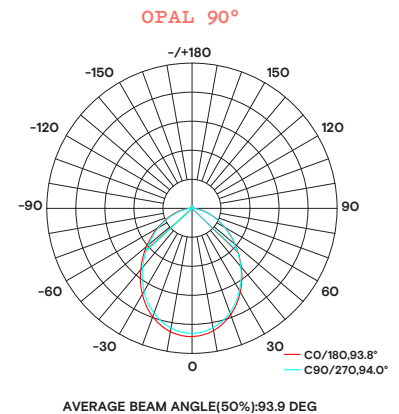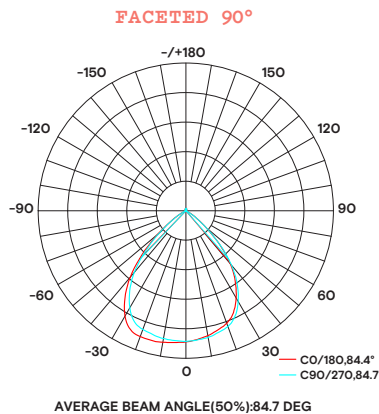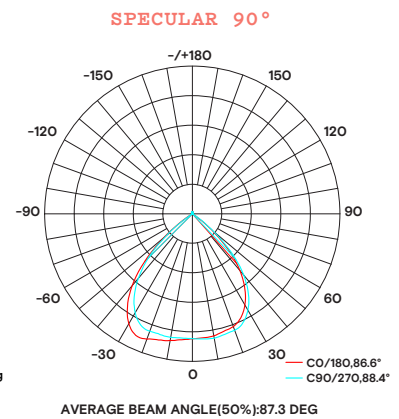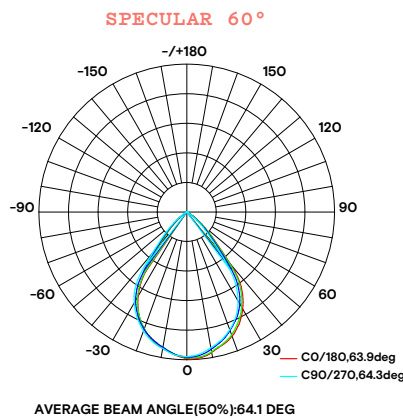

SKU	Wattage	Lumen Output	Dimensions DxH mm /	Cutout D mm /	Technical Drawing
G6DF	6W	530lm	110 x 70	90-95	
G6DS	6W	530lm	110 x 70	90-95	
G8DO	8W	780lm	110 x 70	90-95	
G13DF	13W	1270lm	145 x 82	125-135	
G13DS	13W	1270lm	145 x 82	125-135	
G13DO	13W	1330lm	145 x 82	125-135	
G18DF	18W	1670lm	172 x 95	150-165	
G18DS	18W	1800lm	172 x 95	150-165	
G18DO	18W	1800lm	172 x 95	150-165	
G25DF	25W	2675lm	228 x 98	200-210	
G25DS	25W	2675lm	228 x 98	200-210	
G25DO	25W	2675lm	228 x 98	200-210	

SKU Builder

Use our SKU Builder below to create custom codes from our range.

	Series	Wattage	Type	Product Descriptor	Trim Finish	CRI	CCT	Beam Angle	Control
SKU CODE	G Grace	6 6W	D Downlight	F Faceted	W White	8 80 CRI	3 3000K	60 60°	N Non-Dim
		8 8W		S Specular		9 90 CRI	4 4000K	90 90°	D Triac
		13 13W		O Opal		↑	5 5000K		D10 1-10V
		18 18W		↑			↑		DA DALI
		25 25W							↑
	↑								