

# Thermo Downlight



Using the latest thermoplastic technology the Thermo Downlight provides reliable performance whilst maintaining a high efficiency output. Impervious to rust due to solid and reliable plastic construction. IC-F and TM-21 tested for added piece of mind. Triac dimming comes as standard with dimming levels down to 10%.

## Physical

**Housing** Thermoplastic molded heatsink  
**Optics** PMMA  
**Trim finish** White  
**Mounting Type** Recessed

## Electrical



**Voltage and Current** 50-75V, 110-120mA  
**Control** Triac

## Certification

**Warranty** 5 years  
**Category** IP40  
 AS/NZS 60598.2.1  
 AS/NZS 60598.2.2A  
 TM21 report on request

## Optical

**Beam angle** 38°, 60°  
**CCT** 3000, 4000, 5000K  
**CRI** 80, 90  
**UGR** < 19  
**Efficiency** 88lm/W

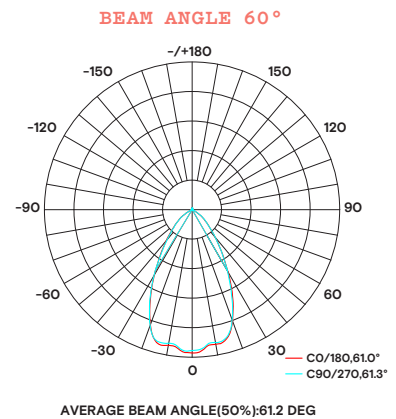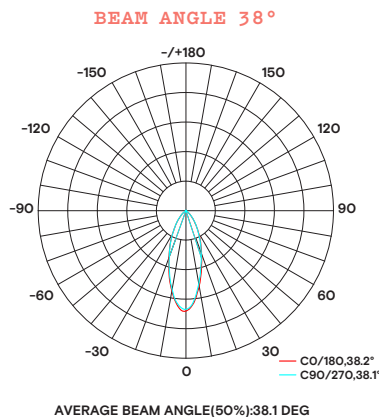

SKU	Wattage	Lumen Output	Dimensions DxH mm	Cutout D mm	Technical Drawing
G7TD	7W	620lm	85 x 64.5	70-75	
G10TD	10W	880lm	105 x 71.5	90-95	

### SKU Builder

Use our SKU Builder below to create custom codes from our range.

Series	Wattage	Type	Trim Finish	CRI	CCT	Beam Angle	Control
<b>G</b> Grace	<b>7</b> 7W	<b>TD</b> Thermoplastic Downlight	<b>W</b> White	<b>8</b> 80 CRI	<b>3</b> 3000K	<b>38</b> 38°	<b>N</b> Non-Dim
	<b>10</b> 10W			<b>9</b> 90 CRI	<b>4</b> 4000K	<b>60</b> 60°	<b>D</b> Triac
					<b>5</b> 5000K		

SKU CODE

↑ ↑ ↑ ↑ ↑