TRIMLESS AESTHETIC
MICRO-OPTIC TECHNOLOGY

Trimless Linear Downlight

Designed to create a clean visual impact on ceiling spaces using a recessed trimless aesthetic. The Trimless Linear Downlight has a UGR<19 rating which delivers exceptional low-glare properties. The use of micro-optic technology delivers a minimal and highly efficient lighting solution.

Physical

Housing ADC12 aluminium
Optics PMMA
Finish White, Black
Mounting type Recessed trimless

Electrical

Voltage and Current
5-40V, 60-550mA
Control Non-dimmable, 1-10V, DALI

Certification

Warranty 5 years
Category IP20
AS/NZS 60598.2.1
AS/NZS 60598.2.2A
TM21 report on request

Optical

Beam angle 15°, 30°, 45°
CCT 3000, 4000, 5000K
CRI 80, 90
UGR < 19
Efficiency 80lm/W

CE RoHS

IC ABUTTED & COVERED

BEAM ANGLE 15°

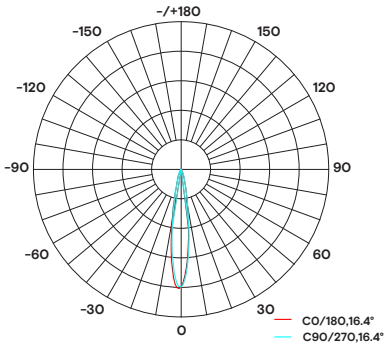

AVERAGE BEAM ANGLE(50%):16.4 DEG

BEAM ANGLE 30°

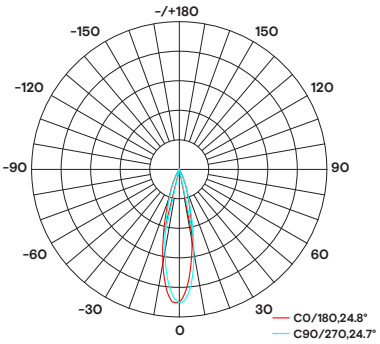

AVERAGE BEAM ANGLE(50%):24.8 DEG

BEAM ANGLE 45°

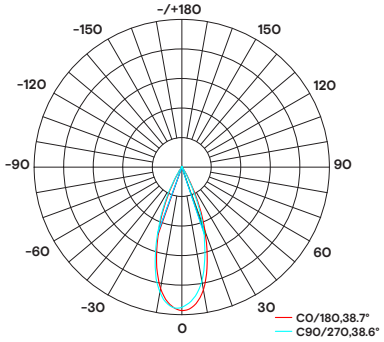

AVERAGE BEAM ANGLE(50%):38.7 DEG

grace

SKU	Wattage	Lumen Output	Dimensions LxWxH mm	Cutout LxW mm	Technical Drawing	
G2LT	2W	160lm	45 x 71 x 49	42 x 41		
G4LT	4W	320lm	75 x 71 x 49	72 x 41		
G10LT	10W	800lm	141 x 71 x 49	145 x 41		
G20LT	20W	1600lm	274 x 71 x 49	277 x 41		
G20LTL	20W	1600lm	406 x 71 x 49	410 x 41		

SKU Builder

Use our SKU Builder below to create custom codes from our range.

	Series	Wattage	Type	Product Descriptor	Trim Finish	CRI	CCT	Beam Angle	Control
SKU CODE	G Grace	2 2W	L Linear Downlight	R Recessed	B Black	8 80 CRI	3 3000K	15 15°	N Non-Dim
		4 4W		RL Recessed Long	W White	9 90 CRI	4 4000K	30 30°	D10 1-10V
		10 10W		T Trimless	↑	↑	5 5000K	45 45°	DA DALI
		20 20W		TL Trimless Long			↑	↑	↑
		↑		A Adjustable					
				AL Adjustable Long					
				↑					

grace