

Universal Batten



The Universal Batten offers an LED alternative to traditional fluorescent battens. Multiple cable entry options and IP44 rated.

Physical

Housing Folded steel MCPCB heatsink

Optics PMMA diffuser

Finish White

Mounting Type Surface mounted, Suspended

Electrical

Voltage and Current 27-54V, 700-1400mA

Control Non-dimmable, 1-10V, DALI

Certification

Warranty 5 years

Category IP20/IP44

AS/NZS 60598.2.1

TM21 report on request

Optical

Beam angle 122°, 150°

CCT 3000, 4000, 5000K

CRI 80, 90


UGR > 19

Efficiency 110lm/W

RoHS




BEAM ANGLE 122°


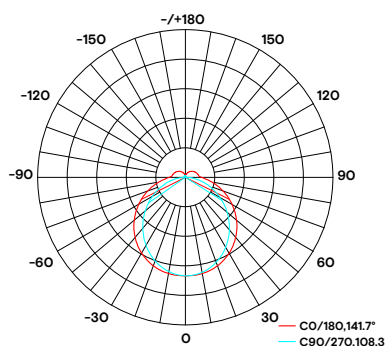


AVERAGE BEAM ANGLE(50%):120.1 DEG

BEAM ANGLE 150°

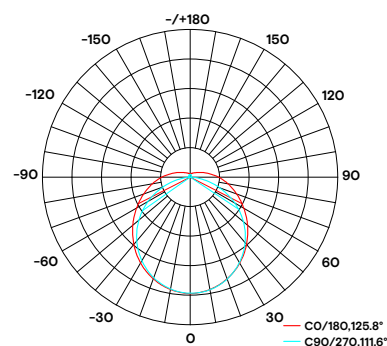

AVERAGE BEAM ANGLE(50%):118.8 DEG

SKU	Wattage	Lumen Output	Dimensions LxWxH mm	Technical Drawing	
G40BC	40W	4400lm	1200 x 208 x 70		
G60BC	60W	6600lm	1500 x 208 x 70		
G80BC	80W	8800lm	1800 x 208 x 70		
G40BS	40W	4400lm	1200 x 175 x 70		
G60BS	60W	6600lm	1500 x 175 x 70		
G80BS	80W	8800lm	1800 x 175 x 70		
G40BR	40W	4400lm	1200 x 180 x 103		
G60BR	60W	6600lm	1500 x 180 x 103		
G80BR	80W	8800lm	1800 x 180 x 103		
G22BRS	22W	2200lm	1181 x 50 x 56		
G32BRS	32W	3520lm	1481 x 50 x 56		
G50BRS	50W	5500lm	1881 x 50 x 56		
SKU	Accessories				
GB-SUS	Suspension Kit				