

Universal Downlight



Visual consistency is achieved through the variety of mounting options. Two types of reflector choices offer greater aesthetic flexibility while keeping the same overall form. Multiple dimming options are available.

Physical

Housing ADC12 aluminium
Optics PMMA
Trim finish White, Black
Reflector finish Silver, Black
Mounting type Recessed, Surface mounted, Suspended, Track mounted

Electrical


Voltage and Current 25-43V, 350-750mA
Control Non-dimmable, Triac, 1-10V, DALI

Certification

Warranty 5 years
Category IP20
AS/NZS 60598.2.1
AS/NZS 60598.2.2A
TM21 report on request

Optical

Beam angle 60°
CCT 2700, 3000, 4000, 5000K
CRI 80, 90
UGR < 19
Efficiency 90lm/W

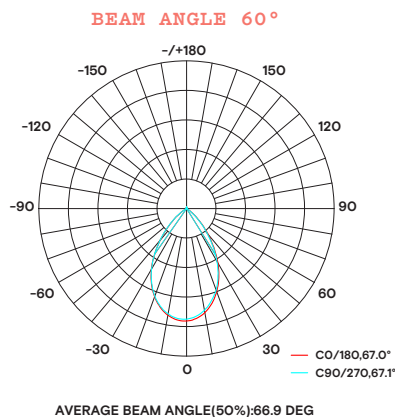

SKU	Wattage	Lumen Output	Dimensions DxH mm	Cutout D mm	Technical Drawing
G15DLG	15W	1350lm	145 x 92	130	
G15CLG	15W	1350lm	160 x 180	N/A	
G23DLG	23W	2070lm	190 x 122	165	
G23CLG	23W	2070lm	230 x 190	N/A	
G29DLG	29W	2610lm	230 x 148	200	
G29CLG	29W	2610lm	265 x 230	N/A	

SKU	Accessories
G15/23/29C-PACC	Pendant Accessory for Cylinder (All sizes)
G15/23/29C-TACC	Track Accessory for Cylinder (All sizes)

SKU Builder

Use our SKU Builder below to create custom codes from our range.

	Series	Wattage	Type	Product Descriptor	Trim Finish	CRI	CCT	Beam Angle	Control
SKU CODE	G Grace	15 15W	C Cylinder	L Low Glare	B Black	8 80 CRI	27 2700K	60 60°	N Non-Dim
		23 23W	D Downlight		W White	9 90 CRI	3 3000K		D10 1-10V
		29 29W	↑		↑	↑	4 4000K		DA DALI
		↑					5 5000K	↑	↑