


## Installation Instructions Pull-out Adjustable Downlight

### Product information

The Novii Pull-out Adjustable Downlight is a recessed ceiling fixture available in several colours, with different beam angles and dimming options to suit most projects.

### Installation steps

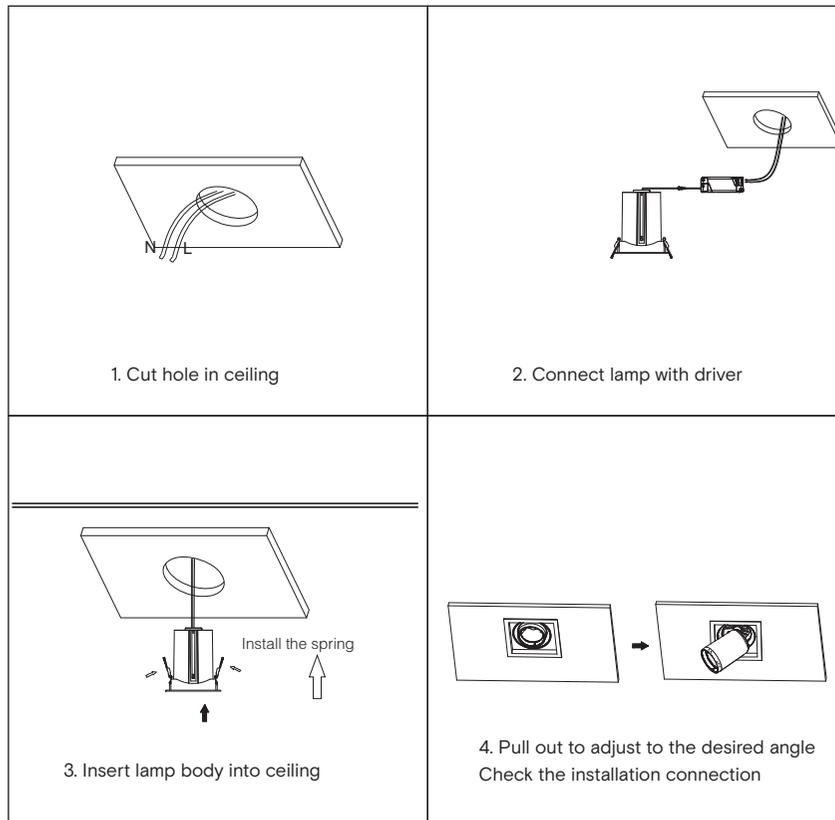

### Technical specifications

Model	Dimension	Cut-out dimension	Power (W)	CCT (K)	PF	IP	Voltage	Control
FCA25	Ø138mm x H168mm	125mm	25	2700 - 5000 + Sunset dim	> 0.9	20	AC220-240V 50/60Hz	Non-dim Triac dim Sunset dim 1-10V DALI
FCA25-002	L140mm x W140mm x H168mm	125mm x 125mm	25	2701 - 5000 + Sunset dim	> 0.9	20	AC220-240V 50/60Hz	
FCA25-003	L270mm x W140mm x H168mm	240mm x 125mm	50	2702 - 5000 + Sunset dim	> 0.9	20	AC220-240V 50/60Hz	

Note : Please check batten label to see if fitting is dimmable and if so which type of dimming.

### Regulations

To ensure correct functionality and safety please read instructions carefully before using this product. This luminaire complies with AS/NZS 60598.2.2A.

All wiring and installation of this luminaire must adhere to local and national wiring rules eg AS/NZS 3000:2007 Amendment 2:2012 Electrical Installation

### TIPS

1. Always ensure power is off and the fitting has cooled down before performing any maintenance or adjustment to the fitting
2. To avoid injury or damage to the fitting, ensure that power leads and screws are secure before connecting the power
3. Handle the fitting with care to avoid breakage
4. Find a suitable location away from liquids or hazards
5. To clean, wipe with a damp clean cloth. Never soak the fitting with water.