

# fluxxLED


Commercial downlight

# Commercial downlight

# fluxxLED



Model shown: F3-CRD28

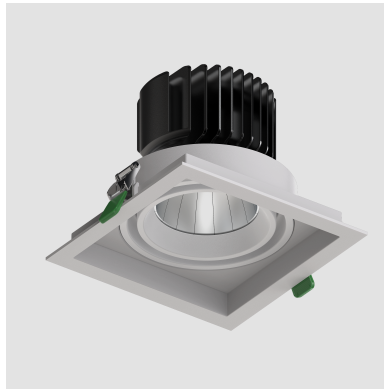

Model shown: F3-CSD28

## Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimension DxH mm	Cutout D mm (LxW mm)
F3-CRD28	28W	3900lm	138 x 110	125-130
F3-CSD28	28W	3900lm	175 x 175 x 130	160x160

## Product Dimensions

SKU	Dimensions (mm)
F3-CRD28	
F3-CSD28	

## Physical

Material  
ADC12 Aluminium

Finish  
White/ Black

Mounting Type  
Recessed

Rotation / Tilt Angle  
355/30°

## Electrical

Voltage  
AC 220-240, 50/60 Hz

Control  
Non-dim/Triac / DALI

## Optical

Beam Angle  
24°/36°/60°

CCT  
2700K, 3000K, 4000K, 5000K

CRI  
90

UGR  
<19

Efficiency  
130lm/W

## Certification

Warranty  
5 years

Category  
IP20

Lifetime  
L70 >50000 Hrs

AS/NZS 60598.2.2A

CE RoHS

IP20