





Reflector silver Reflector black

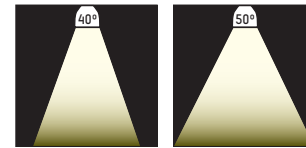

1 - 25mm

150 mm, ET 136 mm

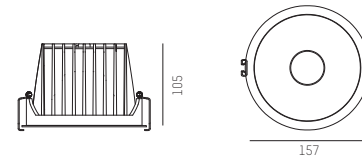

Downlight aus Aluminium
Schwarz oder weiß pulverbeschichtet
Perfekte entblendung durch schwarzen
Kunststoff hochglanz Reflektor schwarz oder silber
Konverter separat ordern

Recessed downlight in aluminium
Black or white powder-coated
Perfect anti-glare due to black or silver high-gloss grid
Please order converter separately

Downlight in alluminio, Verniciato a polvere in nero
Verniciato a polvere in nero o bianco
Anti-abbagliamento garantito da una griglia nera lucida
Converter da ordinare separatamente

Downlight encastré en aluminium, laquée noir
Laquée noir ou blanc
Grille basse-luminance
convertiseur à commander séparément

UGR<16

LED 3500K auf Anfrage / on request

Universal-Betoneinbauegehäuse: siehe Seite 498-499
Universal concrete housing: see page 498-499

A+ - A

IP 20

DARK NIGHT MEDIUM R

Binning SDCM 3 exkl. Konverter / excl. converter

Power feed	500mA - 18W			700mA - 25W			900mA - 33W		
	lm W2	lm W3	lm W4	lm W2	lm W3	lm W4	lm W2	lm W3	lm W4
Order converter not dimm.	24-127532			24-127534			24-127536		
Order converter Dali dimm.	24-127490			24-127490			24-127490		
COLOUR REFLECTOR									
684-0020205WWXX	1580	1640	1760	2100	2190	2340	2580	2680	2870
684-0020305WWXX	1580	1640	1760	2100	2190	2340	2580	2680	2870

ARTIKELNUMMER ERGÄNZEN / COMPLETE CODE

WW = LICHTFARBE/LIGHT COLOUR


XX = FARBE / COLOUR

W2	LED 2700K = 43	PREMIUM CRI >90
W3	LED 3000K = 49	PREMIUM CRI >90
W4	LED 4000K = 24	CRI >90

W	white = 05
S	black = 06

LED CONVERTER DARK NIGHT M

24-127532	W	schaltbar/switchable	for 500mA	L 130 x B 42 x H 30mm
24-127534	W	schaltbar/switchable	for 700mA	L 130 x B 42 x H 30mm
24-127536	W	schaltbar/switchable	for 900mA	L 130 x B 42 x H 30mm
24-127490	W	DALI dimm.	for 700 - 900mA	L 130 x B 42 x H 30mm

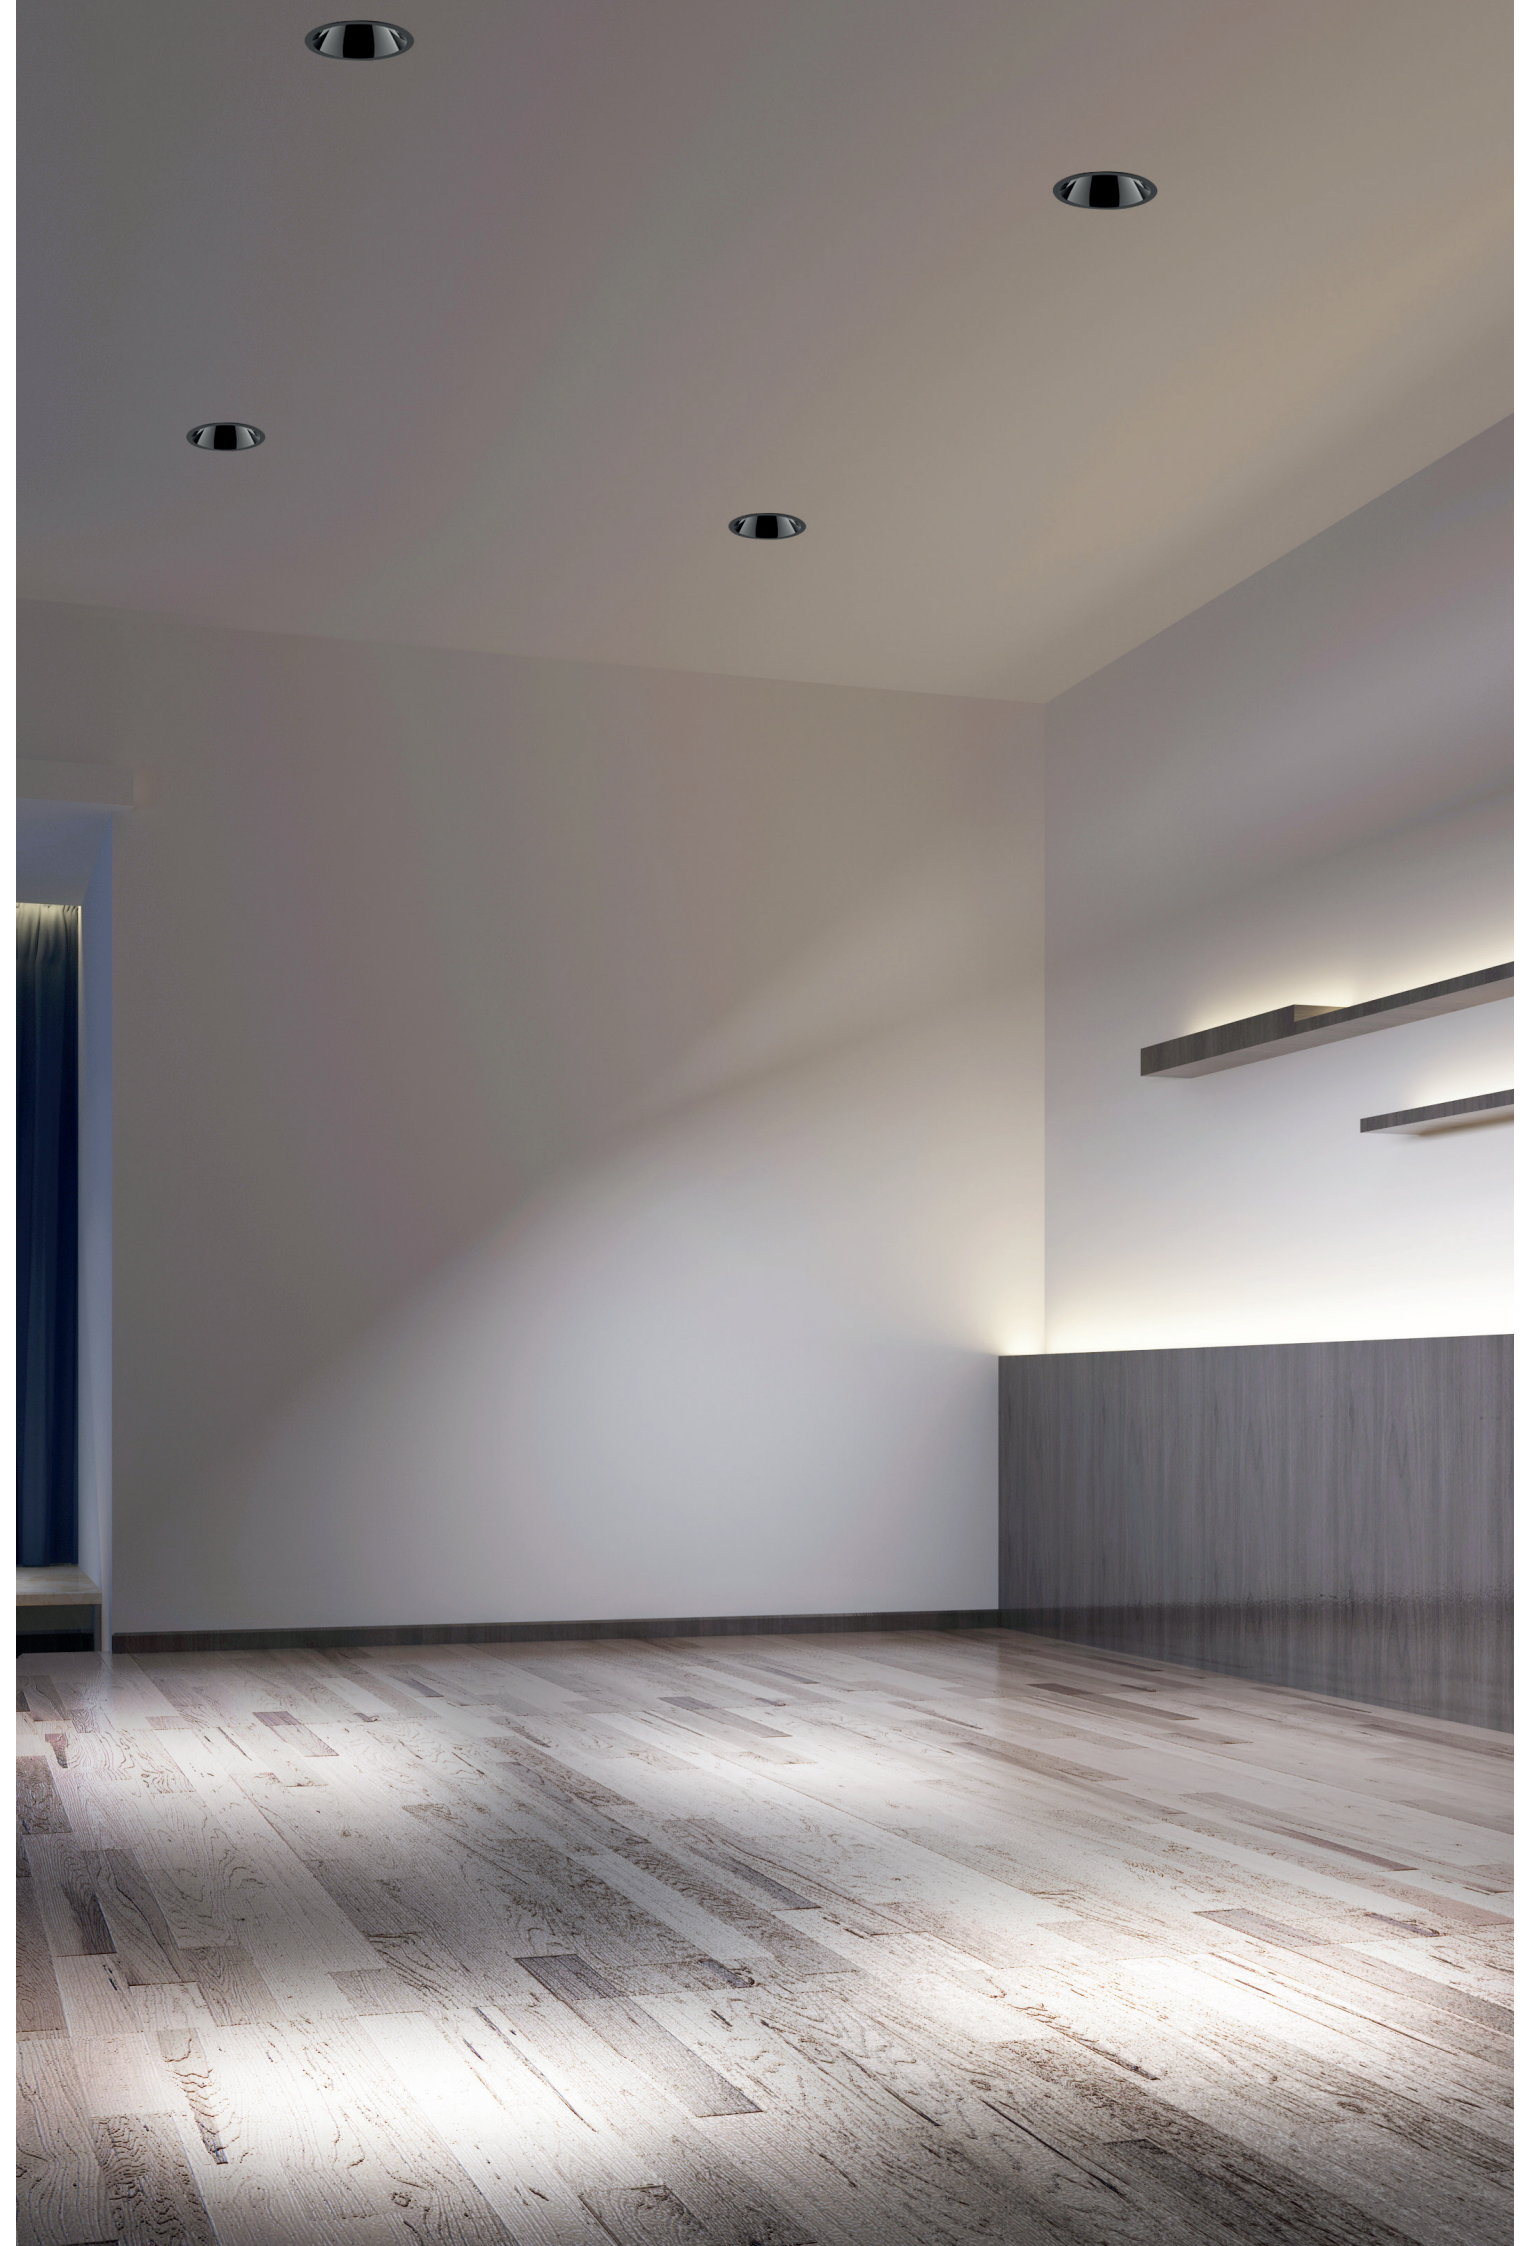

ZURÜCK ZUR ÜBERSICHT / BACK TO OVERVIEW