


fluxxLED

eco panel




Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimension LxWxH mm	Cutout mm
F3-16SSP	16W	1600lm	595 x 295 x 32	585 x 285
F3-36SP	36W	3600lm	595 x 595 x 32	585 x 585
F3-36MP	36W	3600lm	1195 x 295 x 32	1185 x 285
F3-50LP	50W	5000lm	1195 x 595 x 32	1185 x 585

Accessories

SKU	Accessories	Panel Size
F3-PSUS-SS/S/M	Suspension Kit (one kit for 3 sizes)	595 x 295 / 595 x 595 / 1195 x 295
F3-PSUS-L	Suspension Kit	1195 x 595
F3-PRK-SS/S/M	Suspension Kit (one kit for 3 sizes)	595 x 295 / 595 x 595 / 1195 x 295
F3-PRK-K-L	Recessed Kit	1195 x 595
F3-PSM-SSW	Surface Mounted Kit	595 x 595
F3-PSM-SW	Surface Mounted Kit	595 x 595
F3-PSM-MW	Surface Mounted Kit	1195 x 595
F3-PSM-LW	Surface Mounted Kit	1195 x 595

Product Dimensions

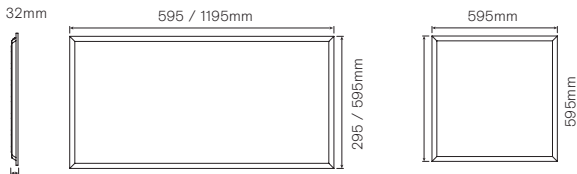

Physical

Material
PC / Steel

Finish
White

Mounting Type
Recessed / Surface mounted /
Suspended

Tilt Angle
N/A

Special Features
Value range
Light weight for easy installation

Electrical

Voltage
AC 220-240, 50/60 Hz

Control
Non-dimmable / Triac

Plug
0.6m AU

Optical

Beam Angle
120°

CCT
3000K, 4000K, 5000K,
5700K- CCT Select

CRI
80

UGR
> 19

Efficiency
100lm/W

SDCM
3

Certification

Warranty
5 years

Category
IP40

Lifetime
L70B10 50000 Hrs

AS/NZS 60598.2.2A
AS/NZS 60598.2.1
TM21 on request

