

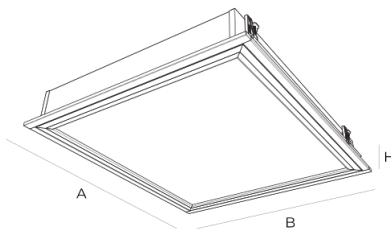


## CLEAN ROOM CDP 600 /840 HE

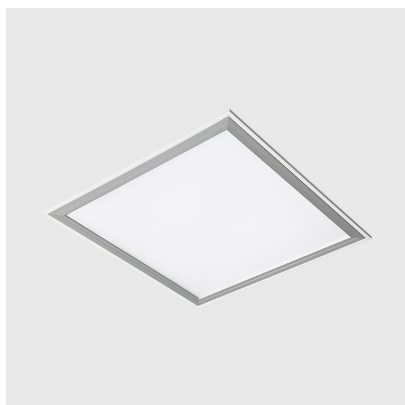

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	Total power [W]
9021119	LED	595/595/105	580/580/140	8.00	4030	34.0



CCT

4000 K

CRI

UGR

>80

<19

LED Service life

60000h L80B10 /SDCM3

**GENERAL** Highly efficient recessed luminaire for direct illumination. Full visual comfort is ensured with the latest optical and electrical components.

**OPTICS** Highly transparent diffuser of microprismatic structure provides glare limitation and a uniform, diffused light. Opal foil provides a uniformly illuminated surface, without visible light sources. Protector of tempered glass provides a smooth surface for easy maintenance.

**LIGHTING MANAGEMENT** The choice of the adequate control gear enables lighting management.

**HOUSING** Housing is made of steel sheet 0.8mm thick, with zinc plated primer coating. Final coating is a special antibacterial white epoxy polyester powder, resistant to aggressive cleaning agents. The luminaire is sealed, while the construction and modality of mounting provide complete sealing with the ceiling.

**APPLICATION** The luminaire is intended for use in monolith and panel suspended ceilings, 7- 65 mm thick.

**EQUIPMENT** Supplied with mounting kit.

**ADDITIONAL** This luminaire can be optionally equipped with an EM module, enabling operation in the case of a power failure, both with the proper autonomy and with the central battery system (CBS). Other light colour temperatures available upon request.





\*\* Add '-5' on ordering code for DALI control gear or


\*\* Add '-4' on ordering code for 1-10V control gear

\* Luminaire luminous flux and connected electrical load - initial tolerance of  $\pm 10\%$  (at ambient temperature of 25°C)

## CLEAN ROOM CDP 600 /840 HO

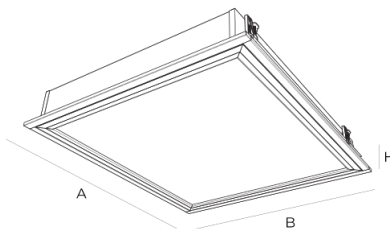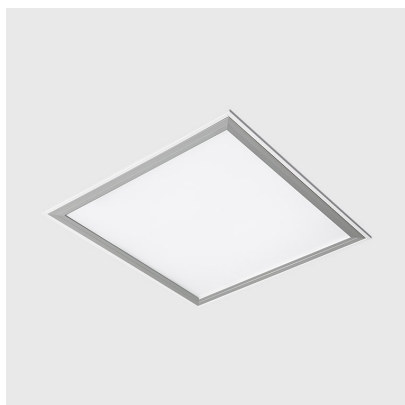

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	Total power [W]
9021121	LED	595/595/105	580/580/140	8.00	5672	50.0



CCT

4000 K

CRI

UGR

>80

<19

LED Service life

60000h L80B10 /SDCM3

**GENERAL** Highly efficient recessed luminaire for direct illumination. Full visual comfort is ensured with the latest optical and electrical components.

**OPTICS** Highly transparent diffuser of microprismatic structure provides glare limitation and a uniform, diffused light. Opal foil provides a uniformly illuminated surface, without visible light sources. Protector of tempered glass provides a smooth surface for easy maintenance.

**LIGHTING MANAGEMENT** The choice of the adequate control gear enables lighting management.

**HOUSING** Housing is made of steel sheet 0.8mm thick, with zinc plated primer coating. Final coating is a special antibacterial white epoxy polyester powder, resistant to aggressive cleaning agents. The luminaire is sealed, while the construction and modality of mounting provide complete sealing with the ceiling.

**APPLICATION** The luminaire is intended for use in monolith and panel suspended ceilings, 7- 65 mm thick.

**EQUIPMENT** Supplied with mounting kit.

**ADDITIONAL** This luminaire can be optionally equipped with an EM module, enabling operation in the case of a power failure, both with the proper autonomy and with the central battery system (CBS). Other light colour temperatures available upon request.





\*\* Add '-5' on ordering code for DALI control gear or

\*\* Add '-4' on ordering code for 1-10V control gear

\* Luminaire luminous flux and connected electrical load - initial tolerance of  $\pm 10\%$  (at ambient temperature of 25°C)

## CLEAN ROOM CDP 1200 /840 HE

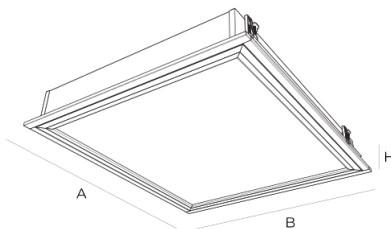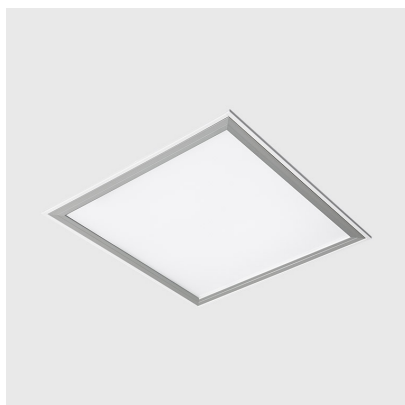

CE

IP65




220V  
240V

CLASS 1

50Hz  
60Hz

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	Total power [W]
9021126	LED	1195/295/105	1180/280/140	9.00	3832	31.0



CCT

4000 K

CRI

UGR

>80

<19

LED Service life

54000h L90B10 /SDCM3

**GENERAL** Highly efficient recessed luminaire for direct illumination. Full visual comfort is ensured with the latest optical and electrical components.

**OPTICS** Highly transparent diffuser of microprismatic structure provides glare limitation and a uniform, diffused light. Opal foil provides a uniformly illuminated surface, without visible light sources. Protector of tempered glass provides a smooth surface for easy maintenance.

**LIGHTING MANAGEMENT** The choice of the adequate control gear enables lighting management.

**HOUSING** Housing is made of steel sheet 0.8mm thick, with zinc plated primer coating. Final coating is a special antibacterial white epoxy polyester powder, resistant to aggressive cleaning agents. The luminaire is sealed, while the construction and modality of mounting provide complete sealing with the ceiling.

**APPLICATION** The luminaire is intended for use in monolith and panel suspended ceilings, 7- 65 mm thick.

**EQUIPMENT** Supplied with mounting kit.

**ADDITIONAL** This luminaire can be optionally equipped with an EM module, enabling operation in the case of a power failure, both with the proper autonomy and with the central battery system (CBS). Other light colour temperatures available upon request.



\*\* Add '-5' on ordering code for DALI control gear or

\*\* Add '-4' on ordering code for 1-10V control gear

\* Luminaire luminous flux and connected electrical load - initial tolerance of  $\pm 10\%$  (at ambient temperature of 25°C)