



CLEAN ROOM DO 600 /840 HE

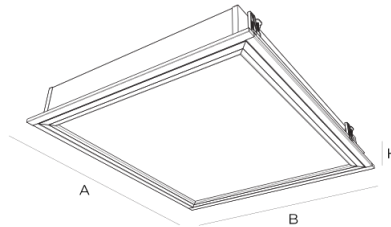

CE

IP65

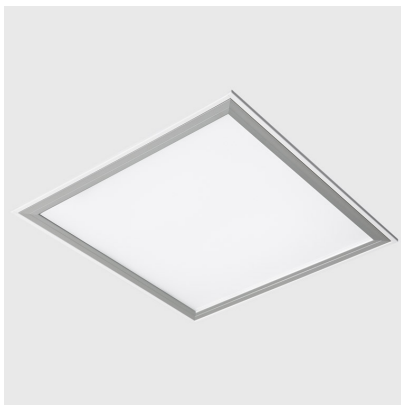


220V
240V

CLASS 1

50Hz
60Hz

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	Total power [W]
9022119	LED	595/595/105	580/580/140	8.00	3805	26.0



CCT

4000 K

CRI

UGR

>80

<22

LED Service life

60000h L80B10/ SDCM3

GENERAL Highly efficient recessed luminaire for direct illumination. Full visual comfort is ensured with the latest optical and electrical components.

OPTICS Opal diffuser, with the frame of extruded aluminium of a special construction, provides a high sealed degree of the luminaire, while forming a flat surface simple for maintenance.


LIGHTING MANAGEMENT The choice of the adequate control gear enables lighting management.

HOUSING Housing is made of steel sheet 0.8mm thick, with zinc plated primer coating. Final coating is a special antibacterial white epoxy polyester powder, resistant to aggressive cleaning agents.

APPLICATION The luminaire is intended for use in monolith and panel suspended ceilings, 7- 65 mm thick.

EQUIPMENT Supplied with mounting kit.

ADDITIONAL This luminaire can be optionally equipped with an EM module, enabling operation in the case of a power failure, both with the proper autonomy and with the central battery system (CBS). Other light colour temperatures available upon request.


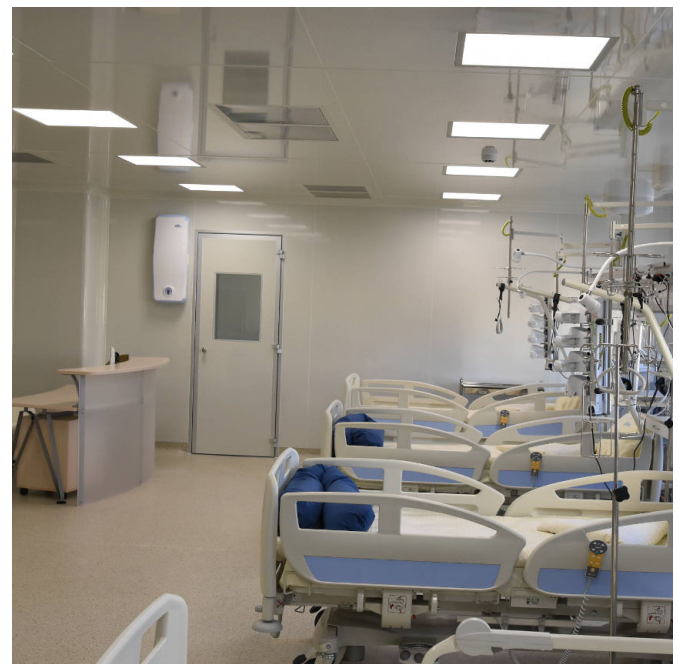


** Add '-5' on ordering code for DALI control gear or

** Add '-4' on ordering code for 1-10V control gear

* Luminaire luminous flux and connected electrical load - initial tolerance of ±10 % (at ambient temperature of 25°C)

CLEAN ROOM DO 600 /840 HO

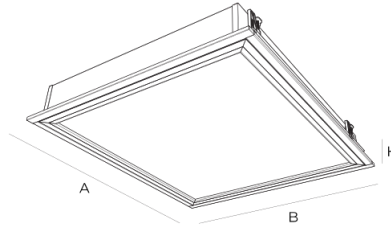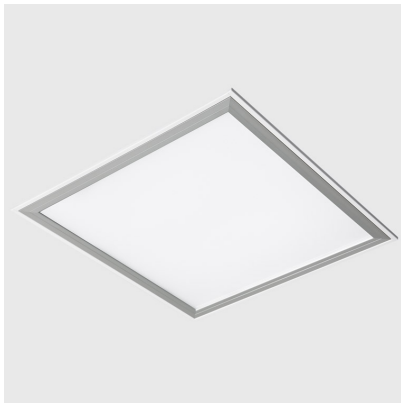

CE

IP65




220V
240V

CLASS 1

50Hz
60Hz

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	Total power [W]
9022121	LED	595/595/105	580/580/140	8.00	5120	36.0



CCT

4000 K

CRI

UGR

>80

<22

LED Service life

60000h L80B10/ SDCM 3

GENERAL Highly efficient recessed luminaire for direct illumination. Full visual comfort is ensured with the latest optical and electrical components.

OPTICS Opal diffuser, with the frame of extruded aluminium of a special construction, provides a high sealed degree of the luminaire, while forming a flat surface simple for maintenance.


LIGHTING MANAGEMENT The choice of the adequate control gear enables lighting management.

HOUSING Housing is made of steel sheet 0.8mm thick, with zinc plated primer coating. Final coating is a special antibacterial white epoxy polyester powder, resistant to aggressive cleaning agents.

APPLICATION The luminaire is intended for use in monolith and panel suspended ceilings, 7- 65 mm thick.

EQUIPMENT Supplied with mounting kit.

ADDITIONAL This luminaire can be optionally equipped with an EM module, enabling operation in the case of a power failure, both with the proper autonomy and with the central battery system (CBS). Other light colour temperatures available upon request.


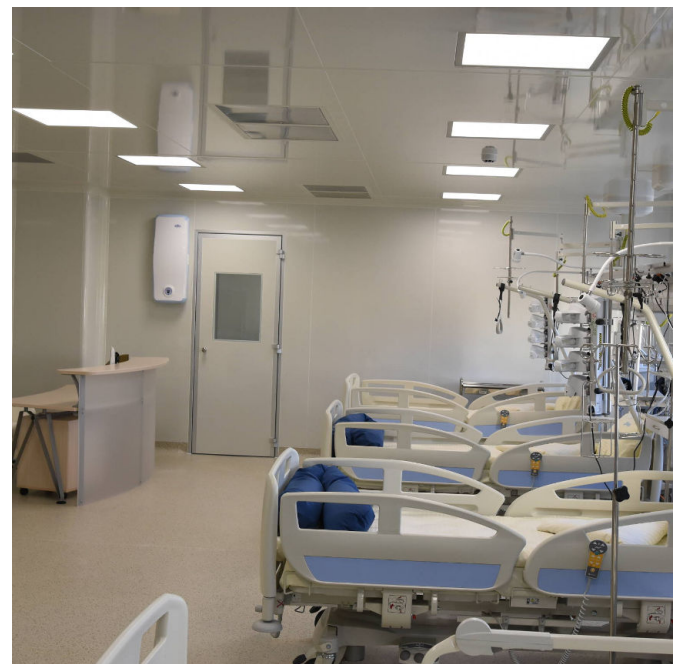


** Add '-5' on ordering code for DALI control gear or

** Add '-4' on ordering code for 1-10V control gear

* Luminaire luminous flux and connected electrical load - initial tolerance of ±10 % (at ambient temperature of 25°C)

CLEAN ROOM DO 1200 /840 HE

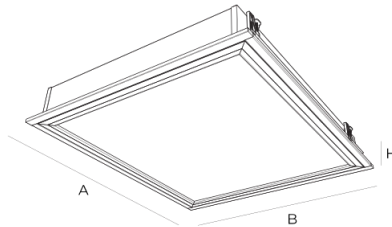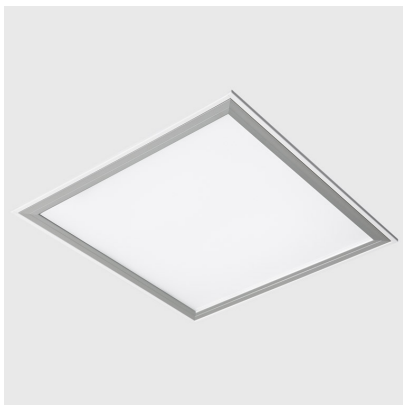

CE

IP65




220V
240V

CLASS 1

50Hz
60Hz

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	Total power [W]
9022127	LED	1195/295/105	1180/280/140	9.00	3552	24.0



CCT

4000 K

CRI

UGR

>80

<22

LED Service life

54000h L90B10 /SDCM 3

GENERAL Highly efficient recessed luminaire for direct illumination. Full visual comfort is ensured with the latest optical and electrical components.

OPTICS Opal diffuser, with the frame of extruded aluminium of a special construction, provides a high sealed degree of the luminaire, while forming a flat surface simple for maintenance.


LIGHTING MANAGEMENT The choice of the adequate control gear enables lighting management.

HOUSING Housing is made of steel sheet 0.8mm thick, with zinc plated primer coating. Final coating is a special antibacterial white epoxy polyester powder, resistant to aggressive cleaning agents.

APPLICATION The luminaire is intended for use in monolith and panel suspended ceilings, 7- 65 mm thick.

EQUIPMENT Supplied with mounting kit.

ADDITIONAL This luminaire can be optionally equipped with an EM module, enabling operation in the case of a power failure, both with the proper autonomy and with the central battery system (CBS). Other light colour temperatures available upon request.


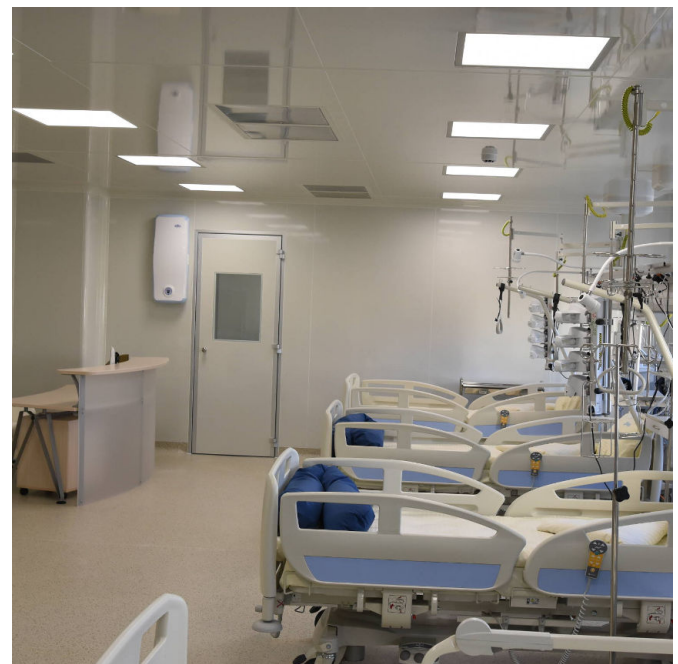


** Add '-5' on ordering code for DALI control gear or

** Add '-4' on ordering code for 1-10V control gear

* Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)

CLEAN ROOM DO 1200 /840 HO

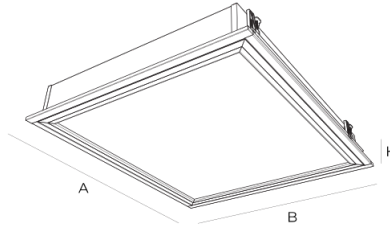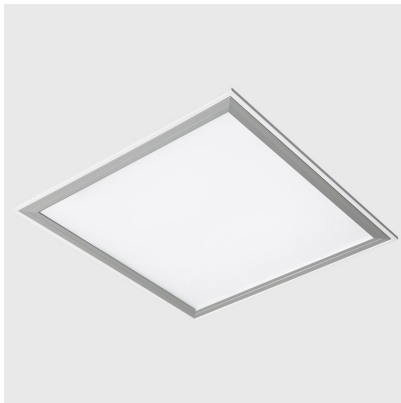

CE

IP65




220V
240V

CLASS 1

50Hz
60Hz

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	Total power [W]
9022128	LED	1195/295/105	1180/280/140	9.00	4912	34.0



CCT

4000 K

CRI

UGR

>80

<22

LED Service life

54000h L90B10 /SDCM 3

GENERAL Highly efficient recessed luminaire for direct illumination. Full visual comfort is ensured with the latest optical and electrical components.

OPTICS Opal diffuser, with the frame of extruded aluminium of a special construction, provides a high sealed degree of the luminaire, while forming a flat surface simple for maintenance.


LIGHTING MANAGEMENT The choice of the adequate control gear enables lighting management.

HOUSING Housing is made of steel sheet 0.8mm thick, with zinc plated primer coating. Final coating is a special antibacterial white epoxy polyester powder, resistant to aggressive cleaning agents.

APPLICATION The luminaire is intended for use in monolith and panel suspended ceilings, 7- 65 mm thick.

EQUIPMENT Supplied with mounting kit.

ADDITIONAL This luminaire can be optionally equipped with an EM module, enabling operation in the case of a power failure, both with the proper autonomy and with the central battery system (CBS). Other light colour temperatures available upon request.

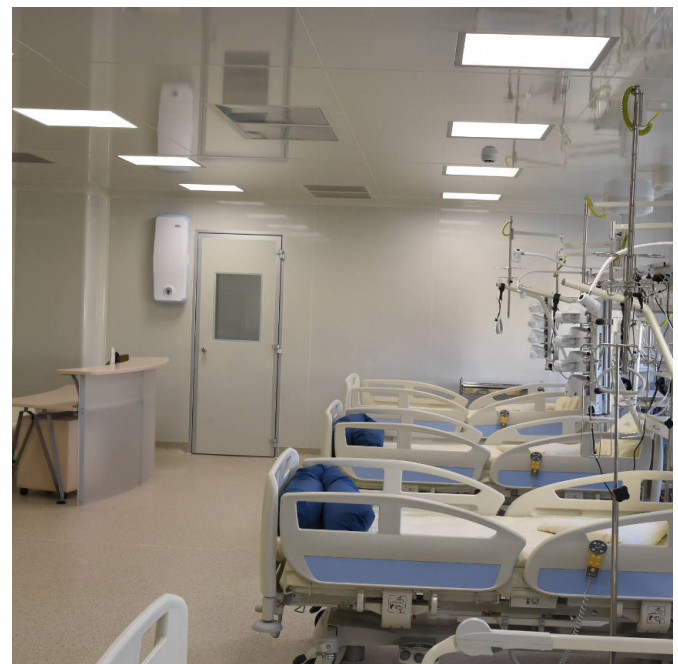

** Add '-5' on ordering code for DALI control gear or

** Add '-4' on ordering code for 1-10V control gear

* Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)