


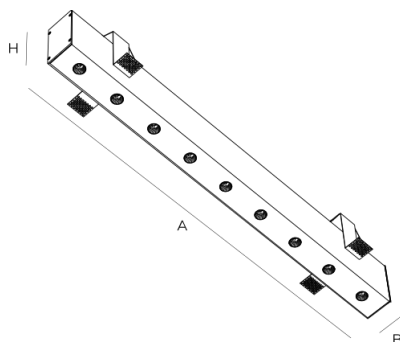


INSERT S TLS MD 900 35dg/840

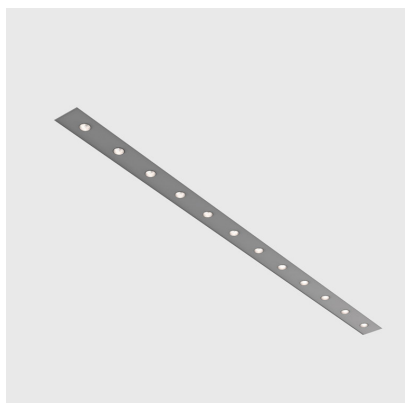

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	∠	Total power [W]
1219111	LED	846/60/110	846/60/170	2.80	1949	35°	18.0



CCT	
4000 K	
CRI	UGR
>80	<6
LED Service life	
50000h L80B10 /SCDM3	

GENERAL High efficiency recessed trimless linear luminaire for direct illumination


OPTICS Linear multispot downlighter reflectors with complex surfaces geometry of micro facets allow precise shaping of light beam. Angles of direct light beam and light reflected from reflector are almost perfectly aligned, providing sharp cut off for full visual comfort.

LIGHTING MANAGEMENT The choice of appropriate control gear enables integration into lighting management systems, including dynamic white function.

HOUSING Housing made of extruded aluminium, without visible frame. Finish: anodisation in natural aluminium colour or polyester powder coating. Fine structured texture. Other colours are available upon request.

APPLICATION Applicable to monolith suspended ceilings.

ADDITIONAL This luminaire can be optionally equipped with an EM module, enabling operation in the case of a power failure. Other light colour temperatures available upon request.


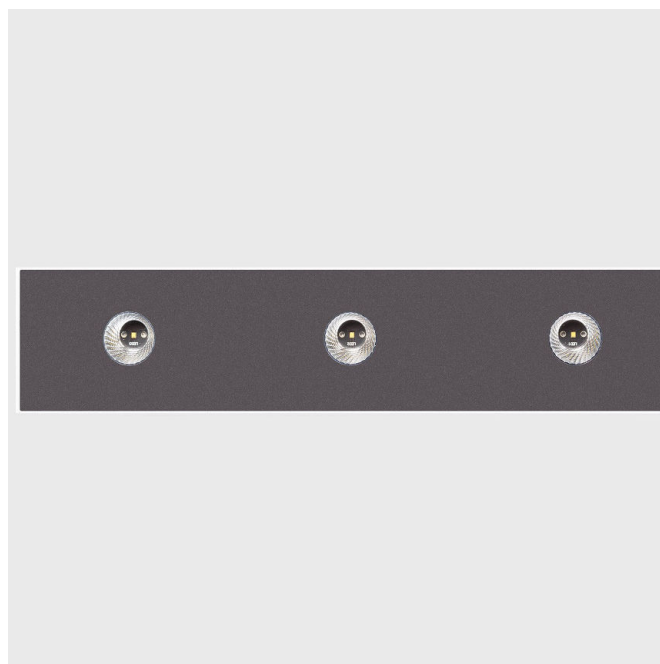


** Add '-5' on ordering code for DALI control gear or


** Add '-4' on ordering code for 1-10V control gear

* Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)

INSERT S TLS MD 900 55dg/840

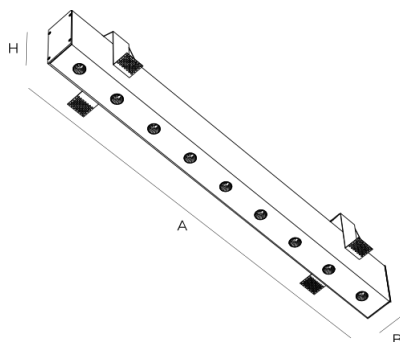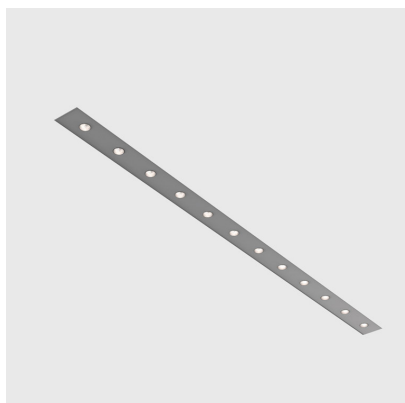

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	∠	Total power [W]
1219112	LED	846/60/110	846/60/170	2.80	2087	55°	18.0



CCT	
4000 K	
CRI	UGR
>80	<13
LED Service life	
50000h L80B10 /SCDM3	

GENERAL High efficiency recessed trimless linear luminaire for direct illumination


OPTICS Linear multispot downlighter reflectors with complex surfaces geometry of micro facets allow precise shaping of light beam. Angles of direct light beam and light reflected from reflector are almost perfectly aligned, providing sharp cut off for full visual comfort.

LIGHTING MANAGEMENT The choice of appropriate control gear enables integration into lighting management systems, including dynamic white function.

HOUSING Housing made of extruded aluminium, without visible frame. Finish: anodisation in natural aluminium colour or polyester powder coating. Fine structured texture. Other colours are available upon request.

APPLICATION Applicable to monolith suspended ceilings.

ADDITIONAL This luminaire can be optionally equipped with an EM module, enabling operation in the case of a power failure. Other light colour temperatures available upon request.


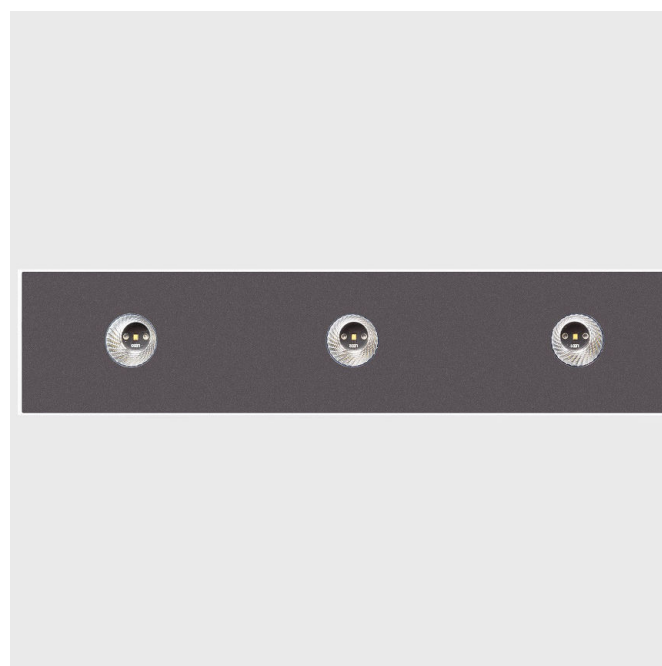


** Add '-5' on ordering code for DALI control gear or


** Add '-4' on ordering code for 1-10V control gear

* Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)

INSERT S TLS MD 900 75dg/840

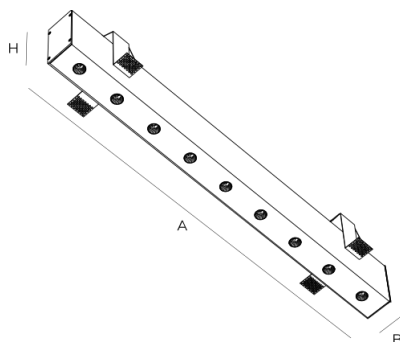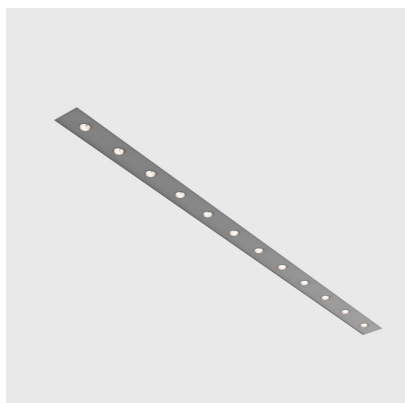

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	∠	Total power [W]
1219113	LED	846/60/110	846/60/170	2.80	2167	75°	18.0



CCT	
4000 K	
CRI	UGR
>80	<19
LED Service life	
50000h L80B10 /SCDM3	

GENERAL High efficiency recessed trimless linear luminaire for direct illumination


OPTICS Linear multispot downlighter reflectors with complex surfaces geometry of micro facets allow precise shaping of light beam. Angles of direct light beam and light reflected from reflector are almost perfectly aligned, providing sharp cut off for full visual comfort.

LIGHTING MANAGEMENT The choice of appropriate control gear enables integration into lighting management systems, including dynamic white function.

HOUSING Housing made of extruded aluminium, without visible frame. Finish: anodisation in natural aluminium colour or polyester powder coating. Fine structured texture. Other colours are available upon request.

APPLICATION Applicable to monolith suspended ceilings.

ADDITIONAL This luminaire can be optionally equipped with an EM module, enabling operation in the case of a power failure. Other light colour temperatures available upon request.



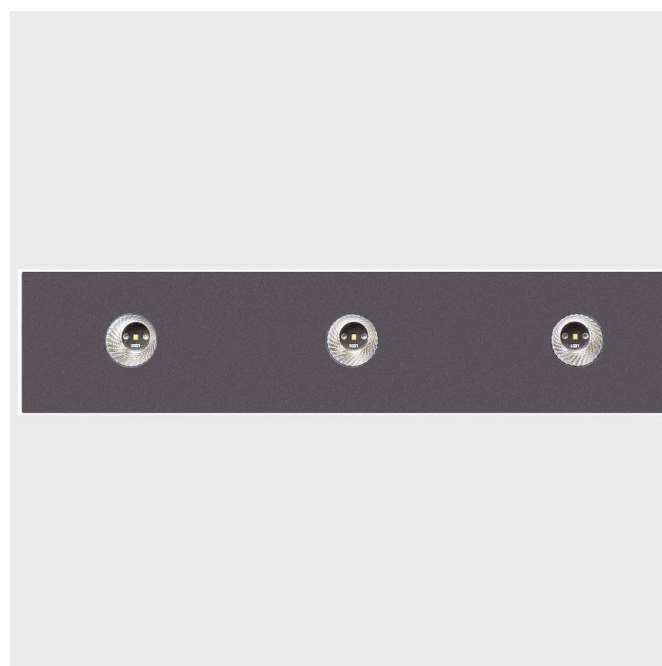


** Add '-5' on ordering code for DALI control gear or


** Add '-4' on ordering code for 1-10V control gear

* Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)

INSERT S TLS MD 1200 35dg/840

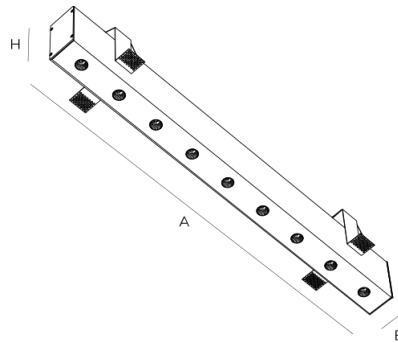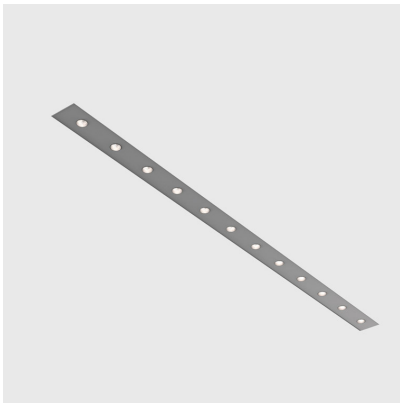

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	∠	Total power [W]
1219121	LED	1126/60/110	1126/60/170	3.60	2599	35°	25.0



CCT	
4000 K	
CRI	UGR
>80	<6
LED Service life	
50000h L80B10 /SCDM3	

GENERAL High efficiency recessed trimless linear luminaire for direct illumination


OPTICS Linear multispot downlighter reflectors with complex surfaces geometry of micro facets allow precise shaping of light beam. Angles of direct light beam and light reflected from reflector are almost perfectly aligned, providing sharp cut off for full visual comfort.

LIGHTING MANAGEMENT The choice of appropriate control gear enables integration into lighting management systems, including dynamic white function.

HOUSING Housing made of extruded aluminium, without visible frame. Finish: anodisation in natural aluminium colour or polyester powder coating. Fine structured texture. Other colours are available upon request.




APPLICATION Applicable to monolith suspended ceilings.

ADDITIONAL This luminaire can be optionally equipped with an EM module, enabling operation in the case of a power failure. Other light colour temperatures available upon request.

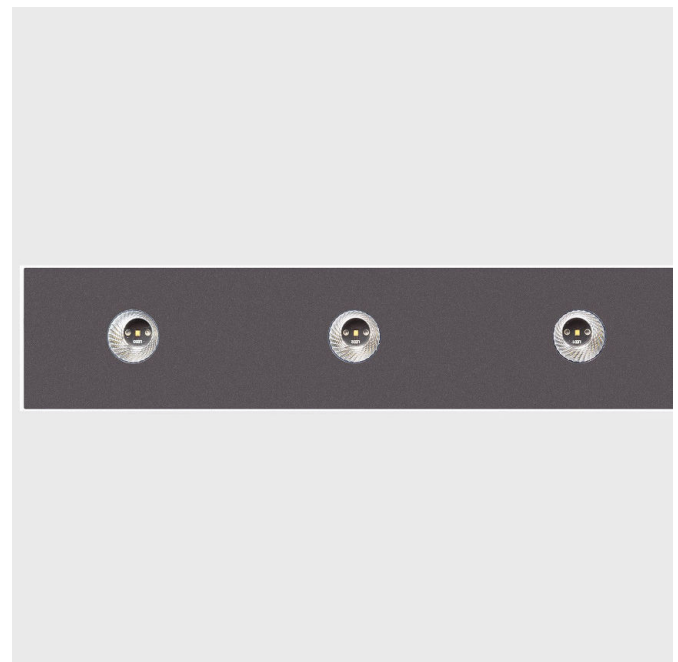


** Add '-5' on ordering code for DALI control gear or
 ** Add '-4' on ordering code for 1-10V control gear
 * Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)

INSERT S TLS MD 1200 55dg/840

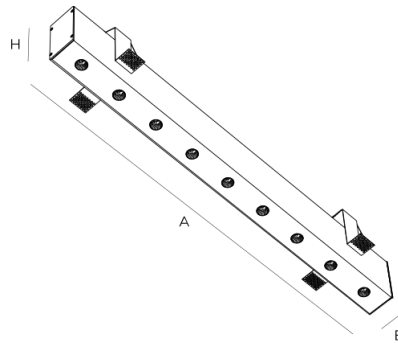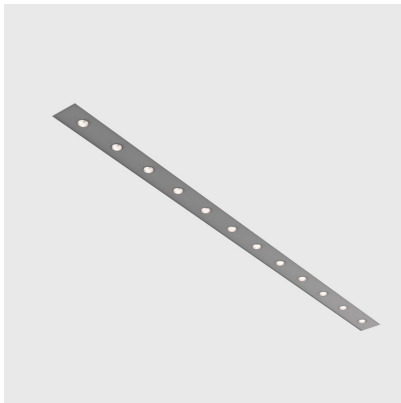

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	∠	Total power [W]
1219122	LED	1126/60/110	1126/60/170	3.60	2783	55°	25.0



CCT	
4000 K	
CRI	UGR
>80	<13
LED Service life	
50000h L80B10 /SCDM3	

GENERAL High efficiency recessed trimless linear luminaire for direct illumination


OPTICS Linear multispot downlighter reflectors with complex surfaces geometry of micro facets allow precise shaping of light beam. Angles of direct light beam and light reflected from reflector are almost perfectly aligned, providing sharp cut off for full visual comfort.

LIGHTING MANAGEMENT The choice of appropriate control gear enables integration into lighting management systems, including dynamic white function.

HOUSING Housing made of extruded aluminium, without visible frame. Finish: anodisation in natural aluminium colour or polyester powder coating. Fine structured texture. Other colours are available upon request.




APPLICATION Applicable to monolith suspended ceilings.

ADDITIONAL This luminaire can be optionally equipped with an EM module, enabling operation in the case of a power failure. Other light colour temperatures available upon request.

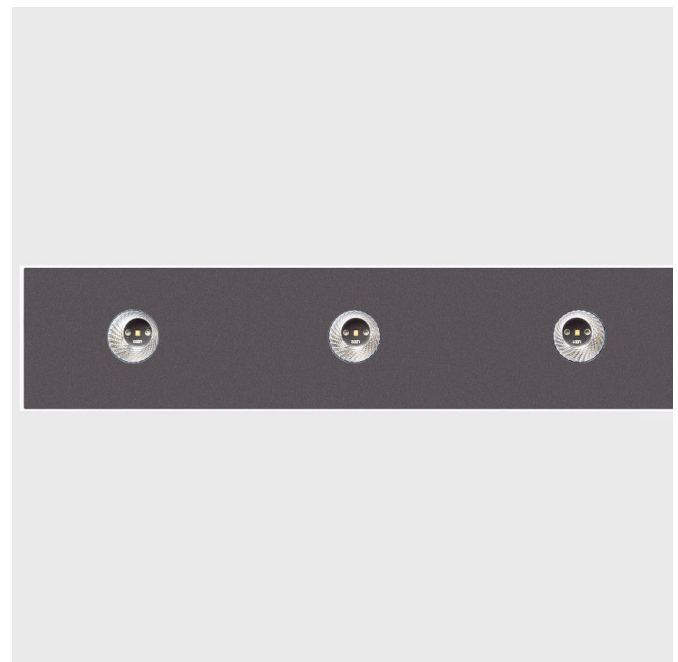


** Add '-5' on ordering code for DALI control gear or
 ** Add '-4' on ordering code for 1-10V control gear
 * Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)

INSERT S TLS MD 1200 75dg/840

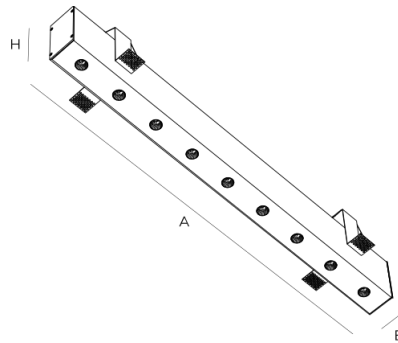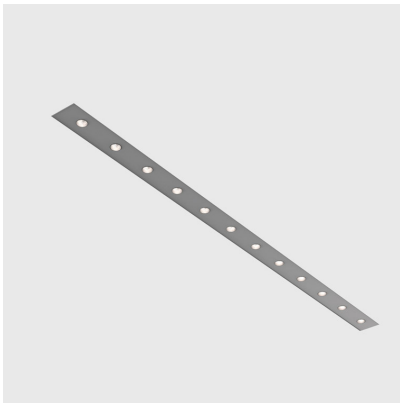

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	∠	Total power [W]
1219123	LED	1126/60/110	1126/60/170	3.60	2889	75°	25.0



CCT	
4000 K	
CRI	UGR
>80	<19
LED Service life	
50000h L80B10 /SCDM3	

GENERAL High efficiency recessed trimless linear luminaire for direct illumination


OPTICS Linear multispot downlighter reflectors with complex surfaces geometry of micro facets allow precise shaping of light beam. Angles of direct light beam and light reflected from reflector are almost perfectly aligned, providing sharp cut off for full visual comfort.

LIGHTING MANAGEMENT The choice of appropriate control gear enables integration into lighting management systems, including dynamic white function.

HOUSING Housing made of extruded aluminium, without visible frame. Finish: anodisation in natural aluminium colour or polyester powder coating. Fine structured texture. Other colours are available upon request.



APPLICATION Applicable to monolith suspended ceilings.

ADDITIONAL This luminaire can be optionally equipped with an EM module, enabling operation in the case of a power failure. Other light colour temperatures available upon request.

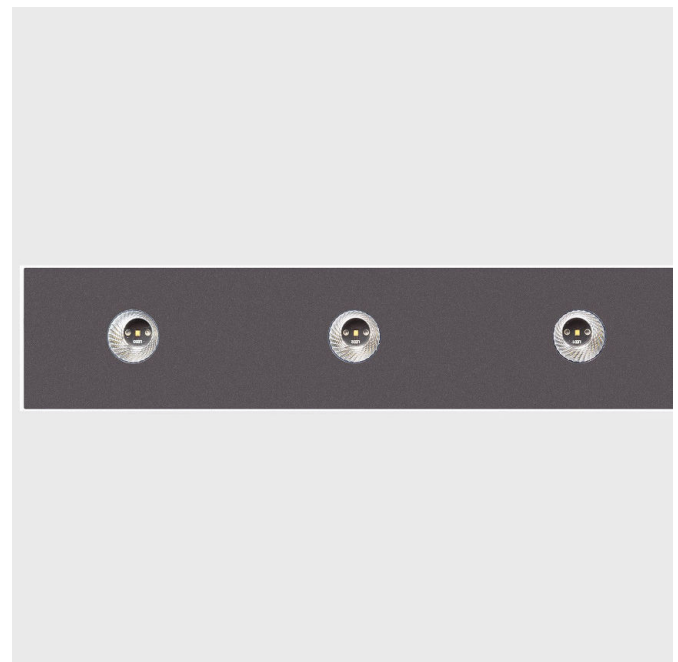


** Add '-5' on ordering code for DALI control gear or
 ** Add '-4' on ordering code for 1-10V control gear
 * Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)

INSERT S TLS MD 1500 35dg/840

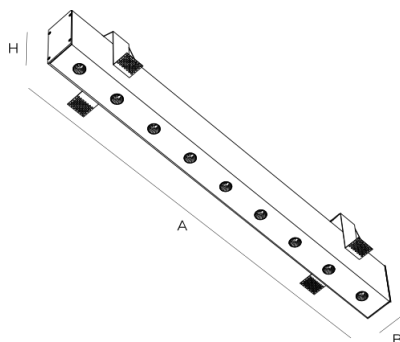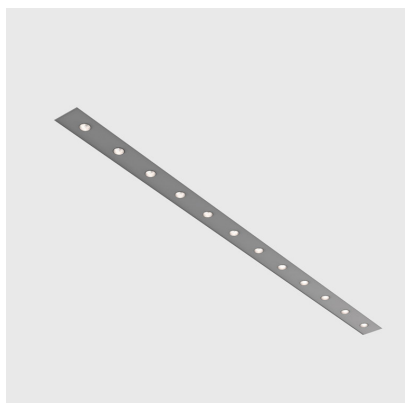

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	∠	Total power [W]
1219131	LED	1406/60/110	1406/60/170	4.30	3249	35°	31.0



CCT	
4000 K	
CRI	UGR
>80	<6
LED Service life	
50000h L80B10 /SCDM3	

GENERAL High efficiency recessed trimless linear luminaire for direct illumination


OPTICS Linear multispot downlighter reflectors with complex surfaces geometry of micro facets allow precise shaping of light beam. Angles of direct light beam and light reflected from reflector are almost perfectly aligned, providing sharp cut off for full visual comfort.

LIGHTING MANAGEMENT The choice of appropriate control gear enables integration into lighting management systems, including dynamic white function.

HOUSING Housing made of extruded aluminium, without visible frame. Finish: anodisation in natural aluminium colour or polyester powder coating. Fine structured texture. Other colours are available upon request.

APPLICATION Applicable to monolith suspended ceilings.

ADDITIONAL This luminaire can be optionally equipped with an EM module, enabling operation in the case of a power failure. Other light colour temperatures available upon request.



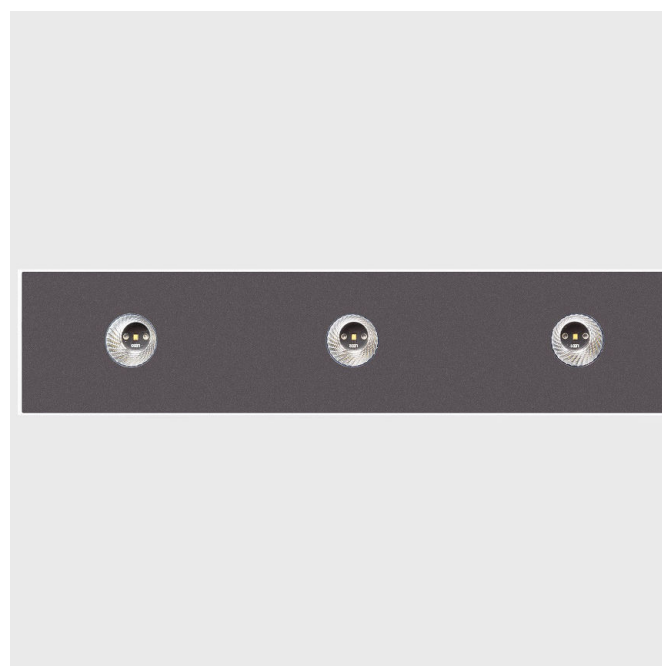


** Add '-5' on ordering code for DALI control gear or


** Add '-4' on ordering code for 1-10V control gear

* Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)

INSERT S TLS MD 1500 55dg/840

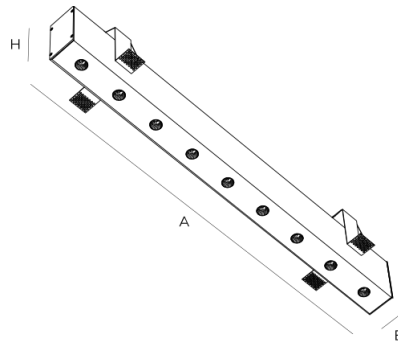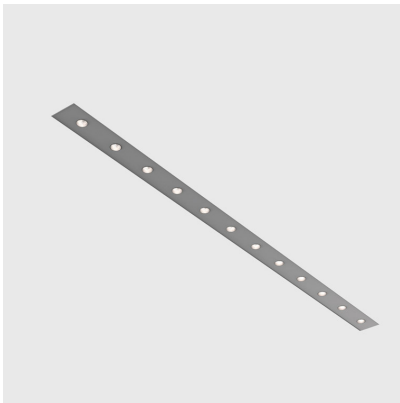

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	∠	Total power [W]
1219132	LED	1406/60/110	1406/60/170	4.30	3479	55°	31.0



CCT	
4000 K	
CRI	UGR
>80	<13
LED Service life	
50000h L80B10 /SCDM3	

GENERAL High efficiency recessed trimless linear luminaire for direct illumination


OPTICS Linear multispot downlighter reflectors with complex surfaces geometry of micro facets allow precise shaping of light beam. Angles of direct light beam and light reflected from reflector are almost perfectly aligned, providing sharp cut off for full visual comfort.

LIGHTING MANAGEMENT The choice of appropriate control gear enables integration into lighting management systems, including dynamic white function.

HOUSING Housing made of extruded aluminium, without visible frame. Finish: anodisation in natural aluminium colour or polyester powder coating. Fine structured texture. Other colours are available upon request.




APPLICATION Applicable to monolith suspended ceilings.

ADDITIONAL This luminaire can be optionally equipped with an EM module, enabling operation in the case of a power failure. Other light colour temperatures available upon request.

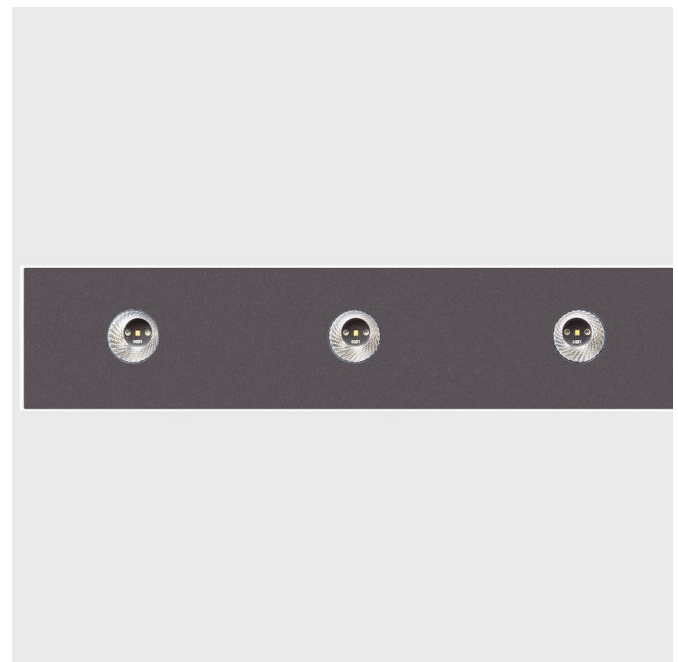


** Add '-5' on ordering code for DALI control gear or
 ** Add '-4' on ordering code for 1-10V control gear
 * Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)

INSERT S TLS MD 1500 75dg/840

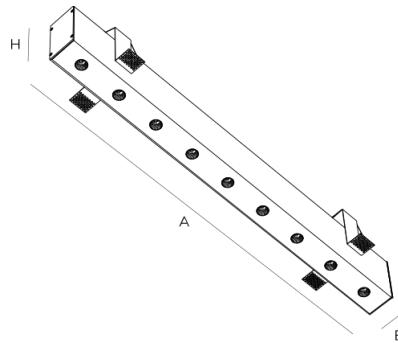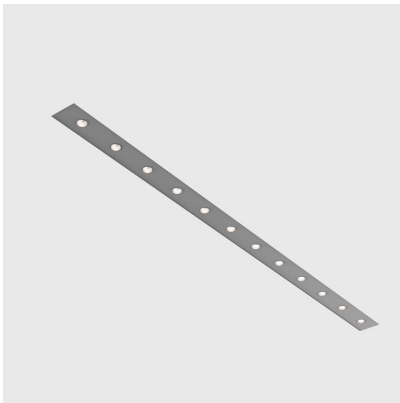

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	∠	Total power [W]
1219133	LED	1406/60/110	1406/60/170	4.30	3611	75°	31.0



CCT	
4000 K	
CRI	UGR
>80	<19
LED Service life	
50000h L80B10 /SCDM3	

GENERAL High efficiency recessed trimless linear luminaire for direct illumination


OPTICS Linear multispot downlighter reflectors with complex surfaces geometry of micro facets allow precise shaping of light beam. Angles of direct light beam and light reflected from reflector are almost perfectly aligned, providing sharp cut off for full visual comfort.

LIGHTING MANAGEMENT The choice of appropriate control gear enables integration into lighting management systems, including dynamic white function.

HOUSING Housing made of extruded aluminium, without visible frame. Finish: anodisation in natural aluminium colour or polyester powder coating. Fine structured texture. Other colours are available upon request.



APPLICATION Applicable to monolith suspended ceilings.

ADDITIONAL This luminaire can be optionally equipped with an EM module, enabling operation in the case of a power failure. Other light colour temperatures available upon request.

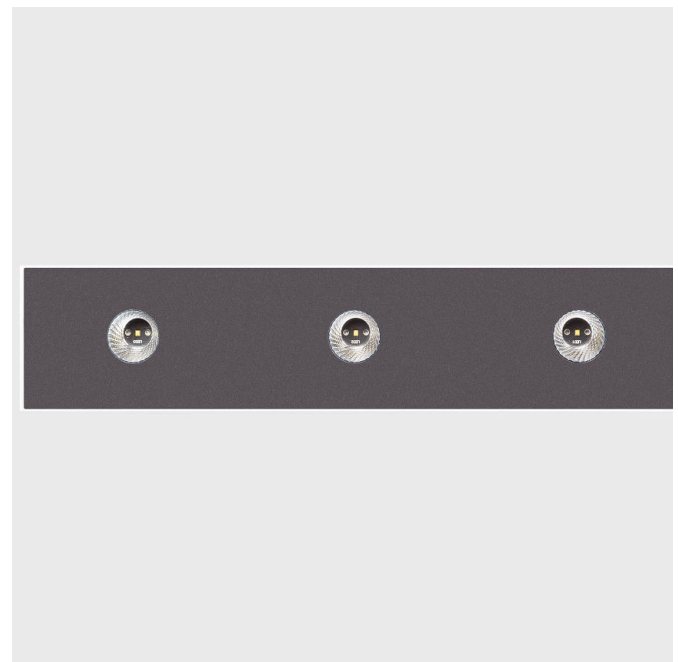


** Add '-5' on ordering code for DALI control gear or
 ** Add '-4' on ordering code for 1-10V control gear
 * Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)

INSERT S TLS MD 2400 35dg/840

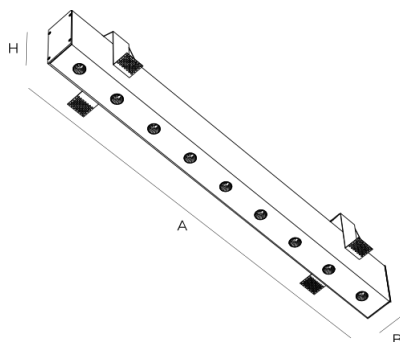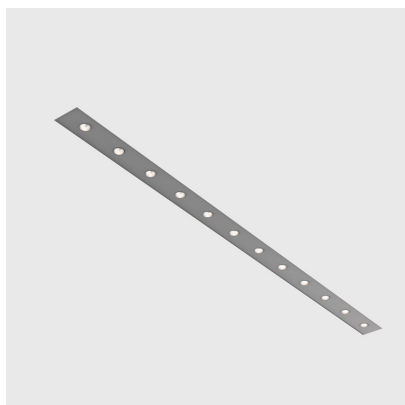

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	∠	Total power [W]
1219141	LED	2248/60/110	2248/60/170	7.00	5198	35°	49.0



CCT	
4000 K	
CRI	UGR
>80	<6
LED Service life	
50000h L80B10 /SCDM3	

GENERAL High efficiency recessed trimless linear luminaire for direct illumination


OPTICS Linear multispot downlighter reflectors with complex surfaces geometry of micro facets allow precise shaping of light beam. Angles of direct light beam and light reflected from reflector are almost perfectly aligned, providing sharp cut off for full visual comfort.

LIGHTING MANAGEMENT The choice of appropriate control gear enables integration into lighting management systems, including dynamic white function.

HOUSING Housing made of extruded aluminium, without visible frame. Finish: anodisation in natural aluminium colour or polyester powder coating. Fine structured texture. Other colours are available upon request.

APPLICATION Applicable to monolith suspended ceilings.

ADDITIONAL This luminaire can be optionally equipped with an EM module, enabling operation in the case of a power failure. Other light colour temperatures available upon request.


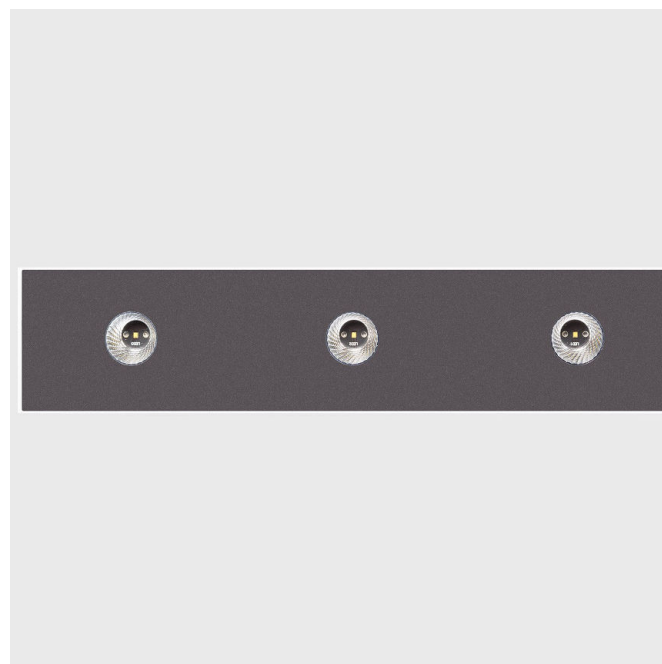


** Add '-5' on ordering code for DALI control gear or


** Add '-4' on ordering code for 1-10V control gear

* Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)

INSERT S TLS MD 2400 55dg/840

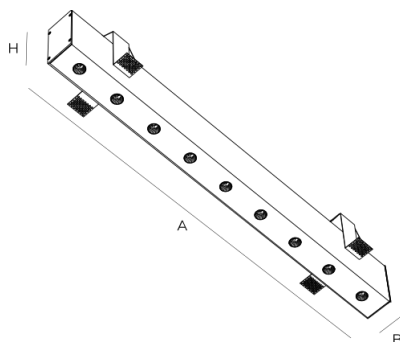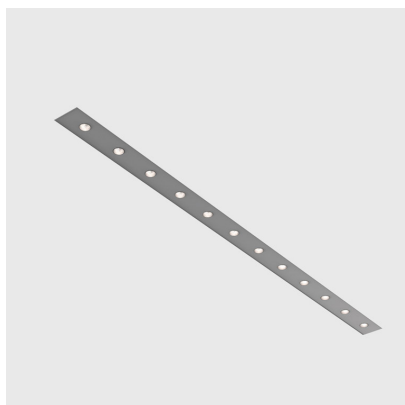

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	∠	Total power [W]
1219142	LED	2248/60/110	2248/60/170	7.00	5566	55°	49.0



CCT	
4000 K	
CRI	UGR
>80	<13
LED Service life	
50000h L80B10 /SCDM3	

GENERAL High efficiency recessed trimless linear luminaire for direct illumination


OPTICS Linear multispot downlighter reflectors with complex surfaces geometry of micro facets allow precise shaping of light beam. Angles of direct light beam and light reflected from reflector are almost perfectly aligned, providing sharp cut off for full visual comfort.

LIGHTING MANAGEMENT The choice of appropriate control gear enables integration into lighting management systems, including dynamic white function.

HOUSING Housing made of extruded aluminium, without visible frame. Finish: anodisation in natural aluminium colour or polyester powder coating. Fine structured texture. Other colours are available upon request.

APPLICATION Applicable to monolith suspended ceilings.

ADDITIONAL This luminaire can be optionally equipped with an EM module, enabling operation in the case of a power failure. Other light colour temperatures available upon request.


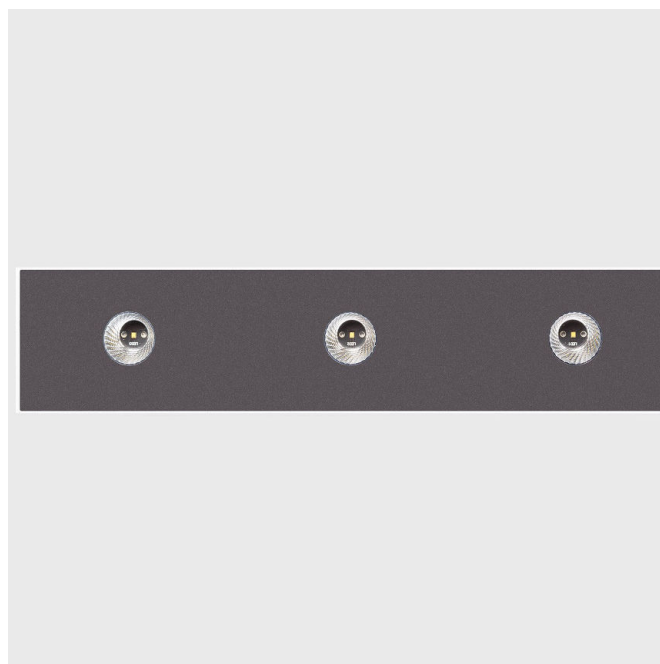


** Add '-5' on ordering code for DALI control gear or


** Add '-4' on ordering code for 1-10V control gear

* Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)

INSERT S TLS MD 2400 75dg/840

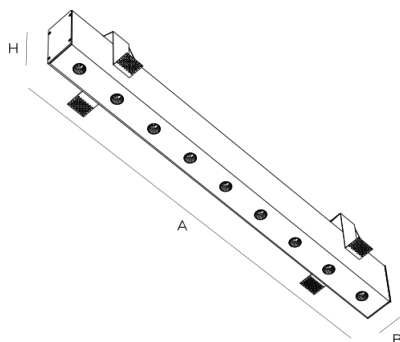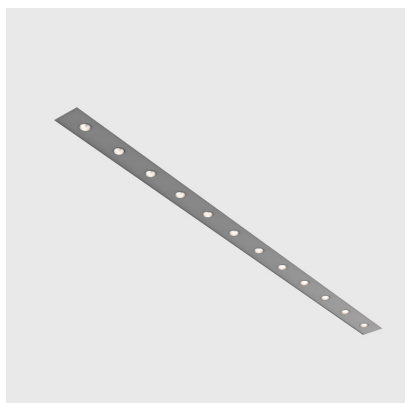

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	∠	Total power [W]
1219143	LED	2248/60/110	2248/60/170	7.00	5778	75°	49.0



CCT	
4000 K	
CRI	UGR
>80	<19
LED Service life	
50000h L80B10 /SCDM3	

GENERAL High efficiency recessed trimless linear luminaire for direct illumination


OPTICS Linear multispot downlighter reflectors with complex surfaces geometry of micro facets allow precise shaping of light beam. Angles of direct light beam and light reflected from reflector are almost perfectly aligned, providing sharp cut off for full visual comfort.

LIGHTING MANAGEMENT The choice of appropriate control gear enables integration into lighting management systems, including dynamic white function.

HOUSING Housing made of extruded aluminium, without visible frame. Finish: anodisation in natural aluminium colour or polyester powder coating. Fine structured texture. Other colours are available upon request.

APPLICATION Applicable to monolith suspended ceilings.

ADDITIONAL This luminaire can be optionally equipped with an EM module, enabling operation in the case of a power failure. Other light colour temperatures available upon request.

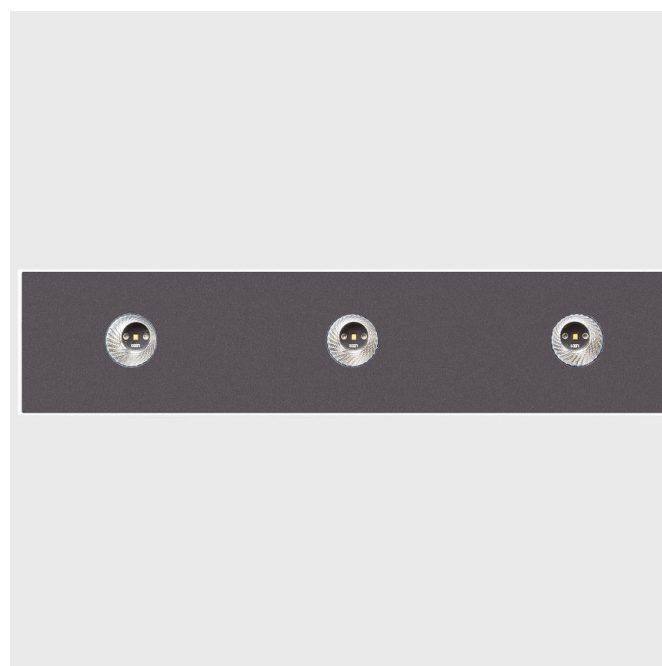

** Add '-5' on ordering code for DALI control gear or

** Add '-4' on ordering code for 1-10V control gear

* Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)