


LUCIA 600 /840



CE

IP20

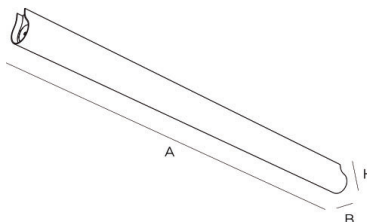


220V
240V

CLASS 1

50Hz
60Hz

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	Total power [W]
2062211	LED	660/68/94	-	1.30	1792	14.0



CCT

4000 K

CRI

UGR

>80

<22

LED Service life

60000h L80B10 /SDCM3

GENERAL Surface mounted luminaire for general illumination, with a simple, minimalistic shape.

LIGHTING MANAGEMENT The choice of appropriate control gear enables integration into lighting management systems.

OPTICS/ HOUSING Diffuser of satinised PMMA shaped in such a way as to provide maximal light emission surface, completely obscuring the extruded aluminium housing. Lateral PC caps in anthracite colour.

FEATURES Elegant linear luminaire appropriate for different models of multiplication, according to the desired concept. Easy tool-free mounting and maintenance.

ADDITIONAL Other light colour temperatures available upon request.




** Add '-5' on ordering code for DALI control gear or

** Add '-4' on ordering code for 1-10V control gear

* Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)

LUCIA 900 /840

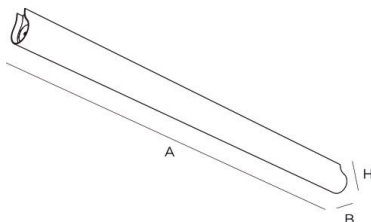

CE

IP20




LED

220V
240V

CLASS 1

50Hz
60Hz

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	Total power [W]
2062311	LED	940/68/94	-	1.70	2688	21.0



CCT

4000 K

CRI

UGR

>80

<22

LED Service life

60000h L80B10 /SDCM3

GENERAL Surface mounted luminaire for general illumination, with a simple, minimalistic shape.

LIGHTING MANAGEMENT The choice of appropriate control gear enables integration into lighting management systems.

OPTICS/ HOUSING Diffuser of satinised PMMA shaped in such a way as to provide maximal light emission surface, completely obscuring the extruded aluminium housing. Lateral PC caps in anthracite colour.

FEATURES Elegant linear luminaire appropriate for different models of multiplication, according to the desired concept. Easy tool-free mounting and maintenance.

ADDITIONAL Other light colour temperatures available upon request.




** Add '-5' on ordering code for DALI control gear or

** Add '-4' on ordering code for 1-10V control gear

* Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)

LUCIA 1200 /840

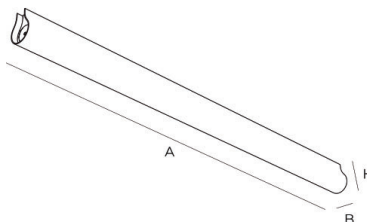

CE

IP20




220V
240V

CLASS 1

50Hz
60Hz

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	Total power [W]
2062411	LED	1220/68/94	-	2.30	3584	29.0



CCT

4000 K

CRI

UGR

>80

<22

LED Service life

60000h L80B10 /SDCM3

GENERAL Surface mounted luminaire for general illumination, with a simple, minimalistic shape.

LIGHTING MANAGEMENT The choice of appropriate control gear enables integration into lighting management systems.

OPTICS/ HOUSING Diffuser of satinised PMMA shaped in such a way as to provide maximal light emission surface, completely obscuring the extruded aluminium housing. Lateral PC caps in anthracite colour.

FEATURES Elegant linear luminaire appropriate for different models of multiplication, according to the desired concept. Easy tool-free mounting and maintenance.

ADDITIONAL Other light colour temperatures available upon request.




** Add '-5' on ordering code for DALI control gear or

** Add '-4' on ordering code for 1-10V control gear

* Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)

LUCIA 1500 /840

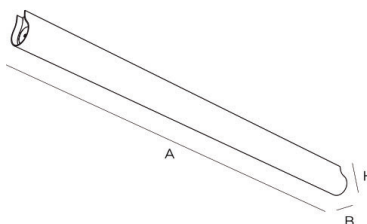

CE

IP20




220V
240V

CLASS 1

50Hz
60Hz

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	Total power [W]
2062511	LED	1500/68/94	-	2.70	4480	36.0



CCT

4000 K

CRI

UGR

>80

<22

LED Service life

60000h L80B10 /SDCM3

GENERAL Surface mounted luminaire for general illumination, with a simple, minimalistic shape.

LIGHTING MANAGEMENT The choice of appropriate control gear enables integration into lighting management systems.

OPTICS/ HOUSING Diffuser of satinised PMMA shaped in such a way as to provide maximal light emission surface, completely obscuring the extruded aluminium housing. Lateral PC caps in anthracite colour.

FEATURES Elegant linear luminaire appropriate for different models of multiplication, according to the desired concept. Easy tool-free mounting and maintenance.

ADDITIONAL Other light colour temperatures available upon request.



** Add '-5' on ordering code for DALI control gear or

** Add '-4' on ordering code for 1-10V control gear

* Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)