

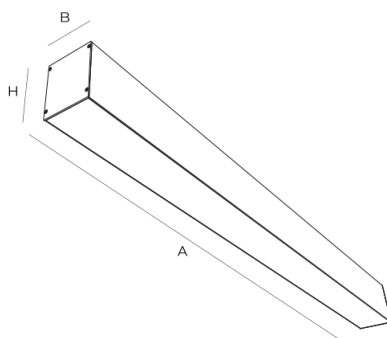


PRIMA M DO IP54 600 / 840 HE

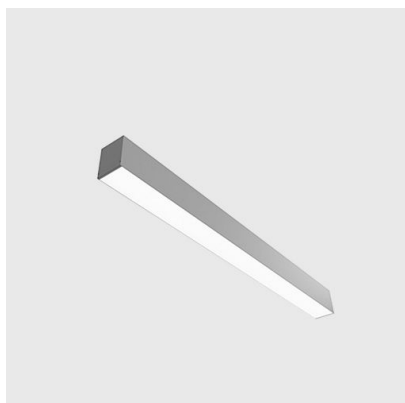

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	Total power [W]
2350221	LED	585/83/100	-	1.90	849	8.0



CO - C160 -- C90 - C270

CCT

4000 K

CRI

UGR

>80

<22

LED Service life

60000h L80B10 /SDCM 3

GENERAL High efficiency surface mounted luminaire for direct illumination of spaces with elevated humidity or in covered outdoor areas, due to high protection degree.

OPTICS Opal diffuser provides a uniform diffusing light and a uniformly illuminated surface, without visible light sources.

LIGHTING MANAGEMENT The choice of appropriate control gear enables integration into lighting management systems.

HOUSING Luminaire of extruded aluminium. Finish: anodisation in natural aluminium colour or with epoxy polyester powder coating. Fine structured texture. Other colours available upon request.

FEATURES Possibility to form a long linear shape adjusted to the space, in order to gain optimal light uniformity and aesthetic consistency of the interior.

ADDITIONAL This luminaire can be optionally equipped with an EM module, enabling operation in the case of a power failure. Other light colour temperatures available upon request.





** Add '-5' on ordering code for DALI control gear or


** Add '-4' on ordering code for 1-10V control gear

* Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)

PRIMA M DO IP54 600 / 840 HO

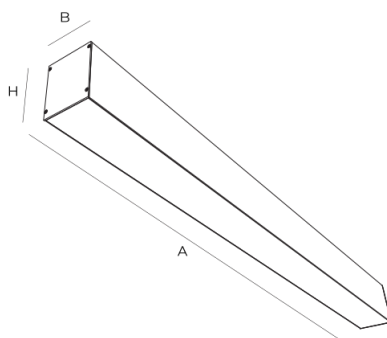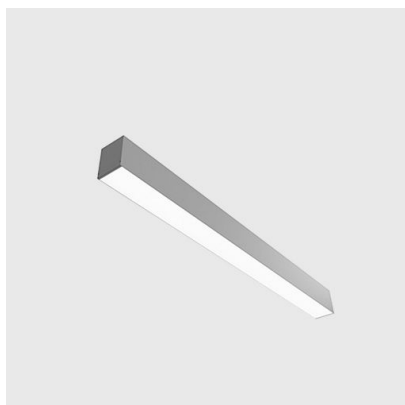

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	Total power [W]
2350241	LED	585/83/100	-	1.90	1497	15.0



CCT	
4000 K	
CRI	UGR
>80	<25
LED Service life	
60000h L80B10 /SDCM 3	

GENERAL High efficiency surface mounted luminaire for direct illumination of spaces with elevated humidity or in covered outdoor areas, due to high protection degree.

OPTICS Opal diffuser provides a uniform diffusing light and a uniformly illuminated surface, without visible light sources.

LIGHTING MANAGEMENT The choice of appropriate control gear enables integration into lighting management systems.

HOUSING Luminaire of extruded aluminium. Finish: anodisation in natural aluminium colour or with epoxy polyester powder coating. Fine structured texture. Other colours available upon request.

FEATURES Possibility to form a long linear shape adjusted to the space, in order to gain optimal light uniformity and aesthetic consistency of the interior.

ADDITIONAL This luminaire can be optionally equipped with an EM module, enabling operation in the case of a power failure. Other light colour temperatures available upon request.





** Add '-5' on ordering code for DALI control gear or


** Add '-4' on ordering code for 1-10V control gear

* Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)

PRIMA M DO IP54 900 / 840 HO

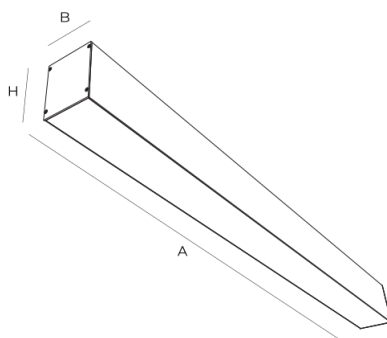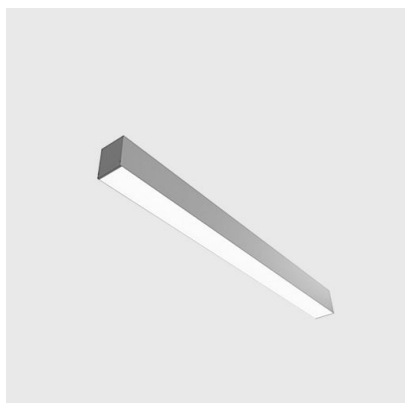

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	Total power [W]
2350341	LED	866/83/100	-	2.60	2245	22.0



CCT	
4000 K	
CRI	UGR
>80	<25
LED Service life	
60000h L80B10 /SDCM 3	

GENERAL High efficiency surface mounted luminaire for direct illumination of spaces with elevated humidity or in covered outdoor areas, due to high protection degree.

OPTICS Opal diffuser provides a uniform diffusing light and a uniformly illuminated surface, without visible light sources.

LIGHTING MANAGEMENT The choice of appropriate control gear enables integration into lighting management systems.

HOUSING Luminaire of extruded aluminium. Finish: anodisation in natural aluminium colour or with epoxy polyester powder coating. Fine structured texture. Other colours available upon request.

FEATURES Possibility to form a long linear shape adjusted to the space, in order to gain optimal light uniformity and aesthetic consistency of the interior.

ADDITIONAL This luminaire can be optionally equipped with an EM module, enabling operation in the case of a power failure. Other light colour temperatures available upon request.





** Add '-5' on ordering code for DALI control gear or


** Add '-4' on ordering code for 1-10V control gear

* Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)

PRIMA M DO IP54 900 / 840 HE

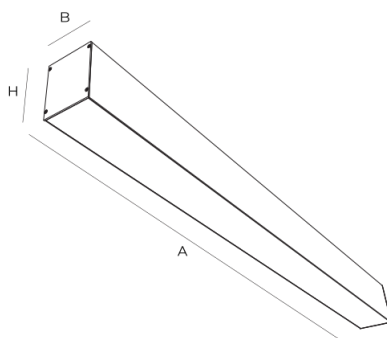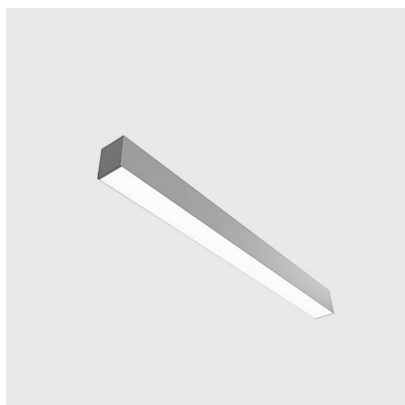

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	Total power [W]
2350321	LED	866/83/100	-	2.60	1274	12.0



CCT	
4000 K	
CRI	UGR
>80	<22
LED Service life	
60000h L80B10 /SDCM 3	

GENERAL High efficiency surface mounted luminaire for direct illumination of spaces with elevated humidity or in covered outdoor areas, due to high protection degree.

OPTICS Opal diffuser provides a uniform diffusing light and a uniformly illuminated surface, without visible light sources.

LIGHTING MANAGEMENT The choice of appropriate control gear enables integration into lighting management systems.

HOUSING Luminaire of extruded aluminium. Finish: anodisation in natural aluminium colour or with epoxy polyester powder coating. Fine structured texture. Other colours available upon request.

FEATURES Possibility to form a long linear shape adjusted to the space, in order to gain optimal light uniformity and aesthetic consistency of the interior.

ADDITIONAL This luminaire can be optionally equipped with an EM module, enabling operation in the case of a power failure. Other light colour temperatures available upon request.





** Add '-5' on ordering code for DALI control gear or


** Add '-4' on ordering code for 1-10V control gear

* Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)

PRIMA M DO IP54 1200 / 840 HE

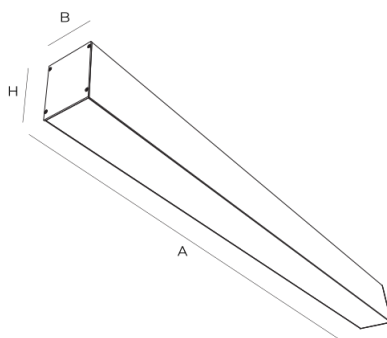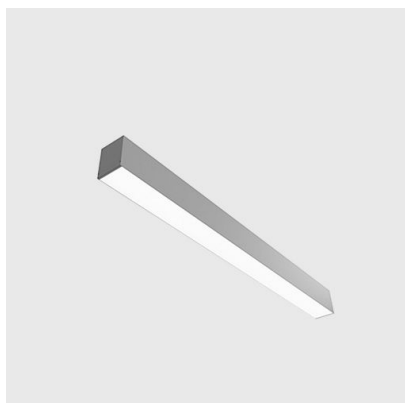

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	Total power [W]
2350421	LED	1146/83/100	-	3.30	1699	15.0



CCT	
4000 K	
CRI	UGR
>80	<22
LED Service life	
60000h L80B10 /SDCM 3	

GENERAL High efficiency surface mounted luminaire for direct illumination of spaces with elevated humidity or in covered outdoor areas, due to high protection degree.

OPTICS Opal diffuser provides a uniform diffusing light and a uniformly illuminated surface, without visible light sources.

LIGHTING MANAGEMENT The choice of appropriate control gear enables integration into lighting management systems.

HOUSING Luminaire of extruded aluminium. Finish: anodisation in natural aluminium colour or with epoxy polyester powder coating. Fine structured texture. Other colours available upon request.

FEATURES Possibility to form a long linear shape adjusted to the space, in order to gain optimal light uniformity and aesthetic consistency of the interior.

ADDITIONAL This luminaire can be optionally equipped with an EM module, enabling operation in the case of a power failure. Other light colour temperatures available upon request.





** Add '-5' on ordering code for DALI control gear or


** Add '-4' on ordering code for 1-10V control gear

* Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)

PRIMA M DO IP54 1200 / 840 HO

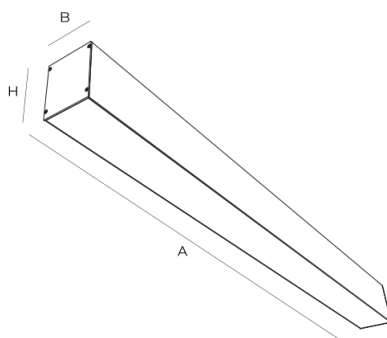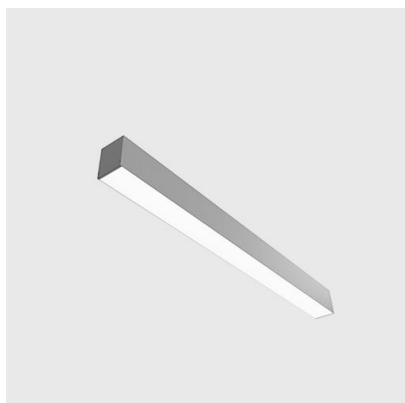

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	Total power [W]
2350441	LED	1146/83/100	-	3.30	2994	29.0



CCT	
4000 K	
CRI	UGR
>80	<25
LED Service life	
60000h L80B10 /SDCM 3	

GENERAL High efficiency surface mounted luminaire for direct illumination of spaces with elevated humidity or in covered outdoor areas, due to high protection degree.

OPTICS Opal diffuser provides a uniform diffusing light and a uniformly illuminated surface, without visible light sources.

LIGHTING MANAGEMENT The choice of appropriate control gear enables integration into lighting management systems.

HOUSING Luminaire of extruded aluminium. Finish: anodisation in natural aluminium colour or with epoxy polyester powder coating. Fine structured texture. Other colours available upon request.

FEATURES Possibility to form a long linear shape adjusted to the space, in order to gain optimal light uniformity and aesthetic consistency of the interior.

ADDITIONAL This luminaire can be optionally equipped with an EM module, enabling operation in the case of a power failure. Other light colour temperatures available upon request.





** Add '-5' on ordering code for DALI control gear or


** Add '-4' on ordering code for 1-10V control gear

* Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)

PRIMA M DO IP54 1500 / 840 HE

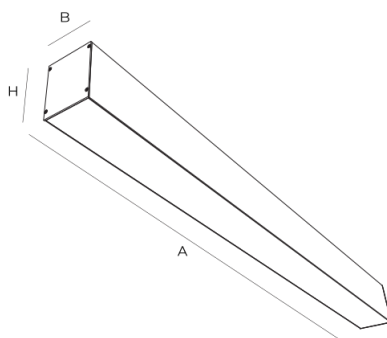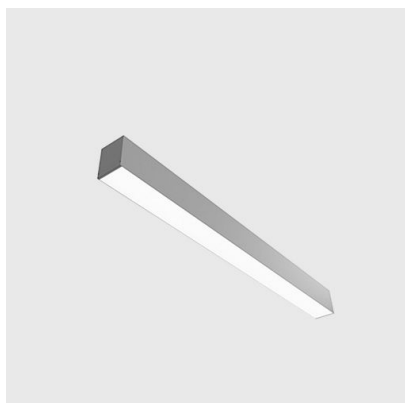

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	Total power [W]
2350521	LED	1426/83/100	-	4.10	2124	19.0



CCT

4000 K

CRI

UGR

>80

<22

LED Service life

60000h L80B10 /SDCM 3

GENERAL High efficiency surface mounted luminaire for direct illumination of spaces with elevated humidity or in covered outdoor areas, due to high protection degree.


OPTICS Opal diffuser provides a uniform diffusing light and a uniformly illuminated surface, without visible light sources.

LIGHTING MANAGEMENT The choice of appropriate control gear enables integration into lighting management systems.

HOUSING Luminaire of extruded aluminium. Finish: anodisation in natural aluminium colour or with epoxy polyester powder coating. Fine structured texture. Other colours available upon request.

FEATURES Possibility to form a long linear shape adjusted to the space, in order to gain optimal light uniformity and aesthetic consistency of the interior.

ADDITIONAL This luminaire can be optionally equipped with an EM module, enabling operation in the case of a power failure. Other light colour temperatures available upon request.


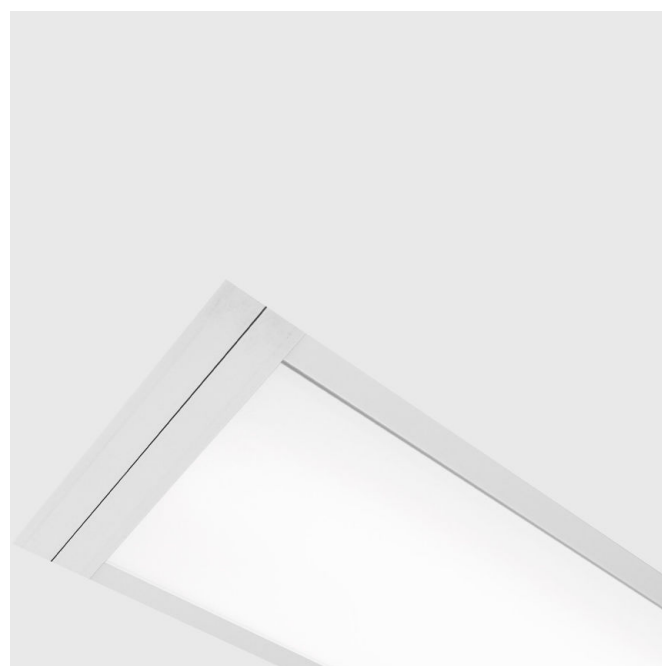


** Add '-5' on ordering code for DALI control gear or


** Add '-4' on ordering code for 1-10V control gear

* Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)

PRIMA M DO IP54 1500 / 840 HO

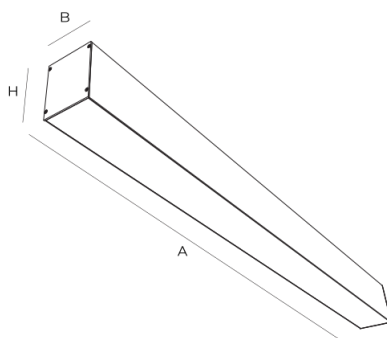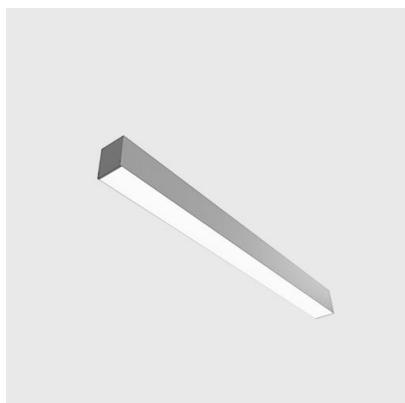

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	Total power [W]
2350541	LED	1426/83/100	-	4.10	3742	36.0



CCT	
4000 K	
CRI	UGR
>80	<25
LED Service life	
60000h L80B10 /SDCM 3	

GENERAL High efficiency surface mounted luminaire for direct illumination of spaces with elevated humidity or in covered outdoor areas, due to high protection degree.


OPTICS Opal diffuser provides a uniform diffusing light and a uniformly illuminated surface, without visible light sources.

LIGHTING MANAGEMENT The choice of appropriate control gear enables integration into lighting management systems.

HOUSING Luminaire of extruded aluminium. Finish: anodisation in natural aluminium colour or with epoxy polyester powder coating. Fine structured texture. Other colours available upon request.

FEATURES Possibility to form a long linear shape adjusted to the space, in order to gain optimal light uniformity and aesthetic consistency of the interior.

ADDITIONAL This luminaire can be optionally equipped with an EM module, enabling operation in the case of a power failure. Other light colour temperatures available upon request.

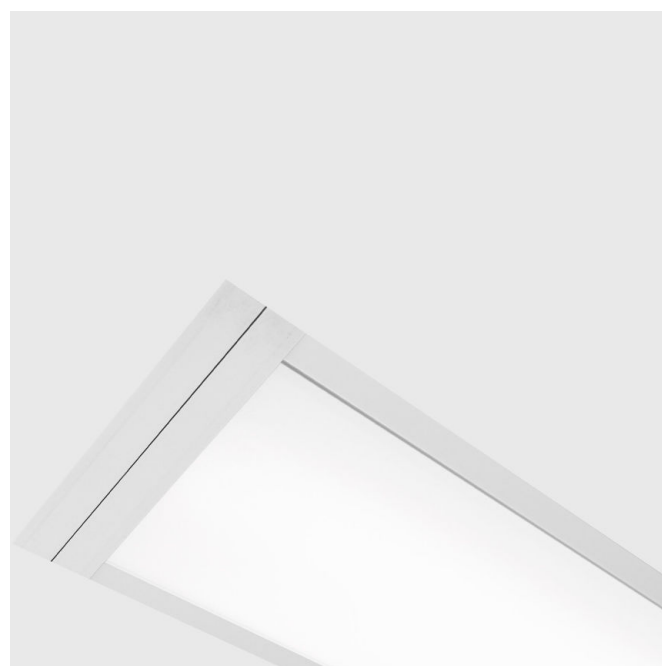

** Add '-5' on ordering code for DALI control gear or

** Add '-4' on ordering code for 1-10V control gear

* Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)