





## RING CDP /840

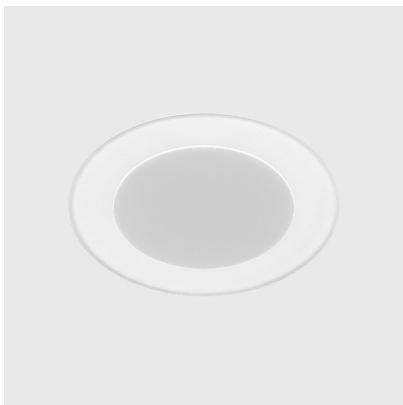

OC ECG **	Socket	Ø/H[mm]	Ø/h[mm]	Weight [kg]	Flux [lm]*	Total power [W]
1550821	LED	390/112	370/120	3.90	1614	18.0



CCT	
4000 K	
CRI	UGR
>80	<19
LED Service life	
60000h L80B10/ SDCM 3	

**GENERAL** Ring shaped luminaire of a particular aesthetic effect, for direct illumination of office spaces.

**OPTICS** Highly transparent diffuser of microprismatic structure provides glare limitation and a uniform, diffused light, according to EN 12464 -(UGR<19). Opal foil provides a uniformly illuminated surface, without visible light sources.

**LIGHTING MANAGEMENT** The choice of appropriate control gear enables integration into lighting management systems.

**HOUSING** Housing made of aluminium sheet, with epoxy white polyester powder coating. Fine structured texture.

**APPLICATION** Applicable to all types of suspended ceilings that can be cut through.

**EQUIPMENT** Supplied with through wiring connector.

**ADDITIONAL** Upon request, applicable to modular ceilings M600. Other light colour temperatures available upon request.



\*\* Add '-5' on ordering code for DALI control gear or  
 \*\* Add '-4' on ordering code for 1-10V control gear  
 \* Luminaire luminous flux and connected electrical load - initial tolerance of ±10 % (at ambient temperature of 25°C)