


TUBE 200 1300 /840

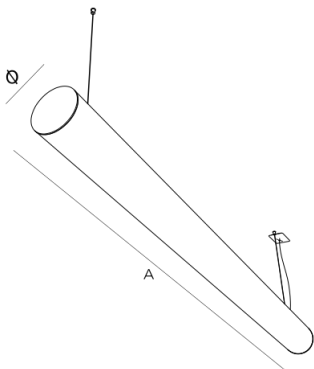


220V
240V

SELV

50Hz
60Hz

OC ECG **	Socket	Ø/H[mm]	Ø/h[mm]	Weight [kg]	Flux [lm]*	Total power [W]
2577421	LED	1300/200	-	3.00	6176	42.0



CCT	
4000 K	
CRI	UGR
>80	<22
LED Service life	
60000h L80B10 /SDCM3	

GENERAL Suspension luminaire for general illumination, appropriate for voluminous spaces.

LIGHTING MANAGEMENT The choice of appropriate control gear enables integration into lighting management systems.

HOUSING/OPTICS Luminaire of opal PMMA provides a uniform, diffused light.


APPLICATION Appropriate for different multiplication models.

ADDITIONAL Suspension kit to be ordered separately. Dynamic White and other light colour temperatures available upon request.



** Add '-5' on ordering code for DALI control gear or
** Add '-4' on ordering code for 1-10V control gear
* Luminaire luminous flux and connected electrical load - initial tolerance of ±10 % (at ambient temperature of 25°C)

TUBE 200 1900 /840

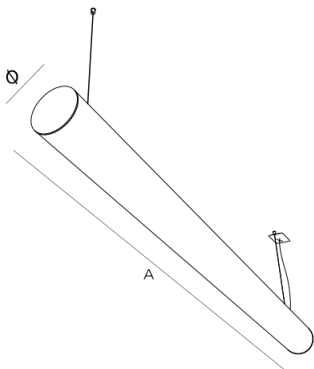


220V
240V

SELV

50Hz
60Hz

OC ECG **	Socket	Ø/H[mm]	Ø/h[mm]	Weight [kg]	Flux [lm]*	Total power [W]
2577621	LED	1900/200	-	4.50	9264	64.0



CCT

4000 K

CRI

UGR

>80

<22

LED Service life

60000h L80B10 /SDCM3

GENERAL Suspension luminaire for general illumination, appropriate for voluminous spaces.

LIGHTING MANAGEMENT The choice of appropriate control gear enables integration into lighting management systems.

HOUSING/OPTICS Luminaire of opal PMMA provides a uniform, diffused light.

APPLICATION Appropriate for different multiplication models.

ADDITIONAL Suspension kit to be ordered separately. Dynamic White and other light colour temperatures available upon request.




** Add '-5' on ordering code for DALI control gear or

** Add '-4' on ordering code for 1-10V control gear

* Luminaire luminous flux and connected electrical load - initial tolerance of ±10 % (at ambient temperature of 25°C)

TUBE 200 2500 /840

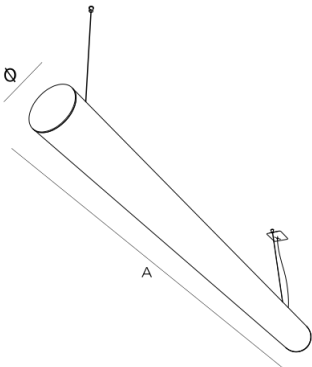


220V
240V

SELV

50Hz
60Hz

OC ECG **	Socket	Ø/H[mm]	Ø/h[mm]	Weight [kg]	Flux [lm]*	Total power [W]
2577821	LED	2500/200	-	6.00	11584	89.0



CCT	
4000 K	
CRI	UGR
>80	<22
LED Service life	

60000h L80B10 /SDCM3

GENERAL Suspension luminaire for general illumination, appropriate for voluminous spaces.

LIGHTING MANAGEMENT The choice of appropriate control gear enables integration into lighting management systems.

HOUSING/OPTICS Luminaire of opal PMMA provides a uniform, diffused light.


APPLICATION Appropriate for different multiplication models.

ADDITIONAL Suspension kit to be ordered separately. Dynamic White and other light colour temperatures available upon request.



** Add '-5' on ordering code for DALI control gear or
** Add '-4' on ordering code for 1-10V control gear
* Luminaire luminous flux and connected electrical load - initial tolerance of ±10 % (at ambient temperature of 25°C)

TUBE 200 3600 /840

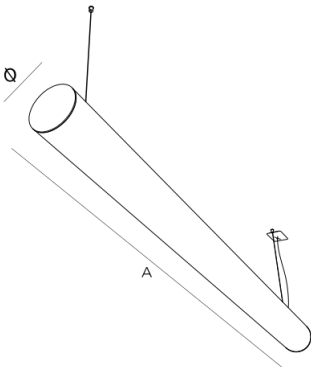


220V
240V

SELV

50Hz
60Hz

OC ECG **	Socket	Ø/H[mm]	Ø/h[mm]	Weight [kg]	Flux [lm]*	Total power [W]
2577921	LED	3600/200	-	9.00	18528	127.0



CCT	
4000 K	
CRI	UGR
>80	<22
LED Service life	

60000h L80B10 /SDCM3

GENERAL Suspension luminaire for general illumination, appropriate for voluminous spaces.

LIGHTING MANAGEMENT The choice of appropriate control gear enables integration into lighting management systems.

HOUSING/OPTICS Luminaire of opal PMMA provides a uniform, diffused light.

APPLICATION Appropriate for different multiplication models.

ADDITIONAL Suspension kit to be ordered separately. Dynamic White and other light colour temperatures available upon request.



** Add '-5' on ordering code for DALI control gear or
** Add '-4' on ordering code for 1-10V control gear
* Luminaire luminous flux and connected electrical load - initial tolerance of ±10 % (at ambient temperature of 25°C)