

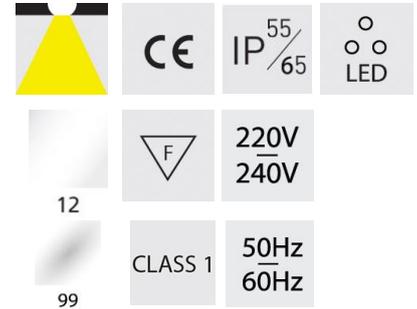


ETNA CR DO

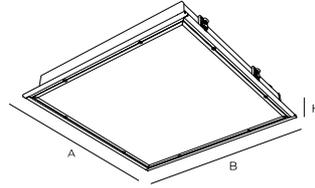

OC ECG	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	lm	W
-	LED	640/640/105	620/620/140	7.00	3426	27.0

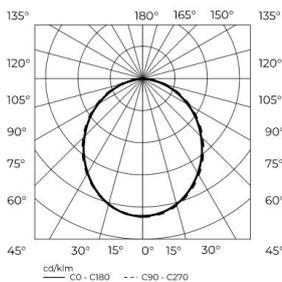

CCT {K}

3000 K

CRI

>80

LED Service life

50000h

GENERAL Highly efficient recessed luminaire for direct illumination. Intended for illumination of spaces in medical institutions, pharmaceutical and other high-tech industry, where technological processes require IP 65/IP 55 protection degree. Full visual comfort is ensured with the latest optical and electrical components.

OPTICS Opal diffuser, with the frame of extruded aluminium provides a high sealed degree of the luminaire, while forming a flat surface simple for maintenance. Also available with optics DP.


LIGHTING MANAGEMENT The choice of the adequate control gear enables lighting management.

HOUSING Housing is made of steel sheet 0.6mm thick. Final coating is white epoxy polyester powder of special reflective white colour.

APPLICATION The luminaire is intended for use in monolith and panel suspended ceilings, 1- 40 mm thick.

EQUIPMENT Supplied with mounting kit.

ADDITIONAL This luminaire can be optionally equipped with an EM module, enabling operation in the case of a power failure, both with the proper autonomy and with the central battery system (CBS). Other light colour temperatures available upon request.

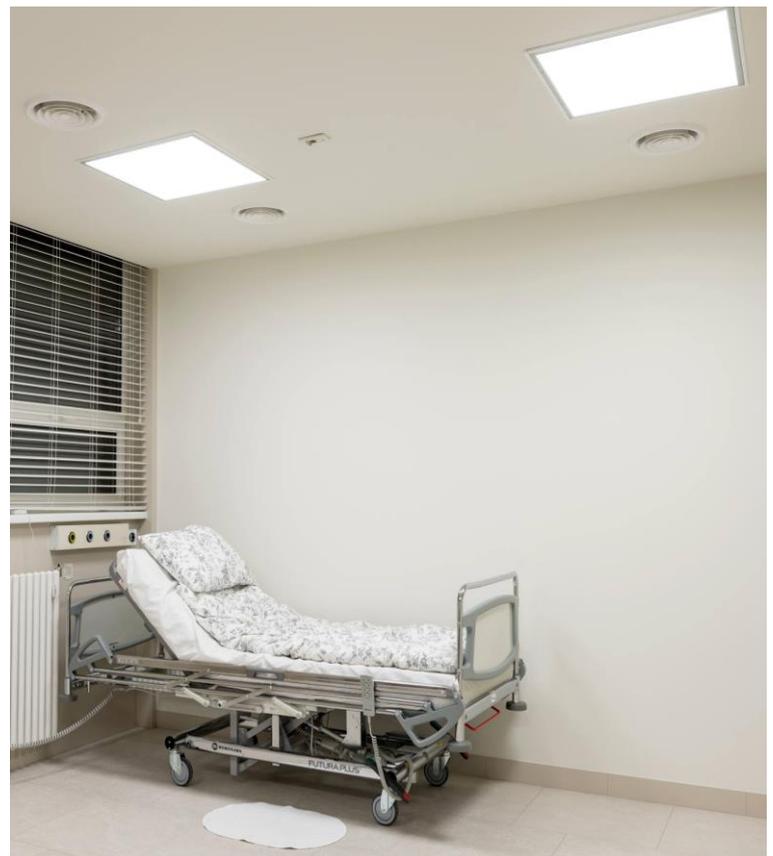

** Add '-5' on ordering code for DALI control gear
 ** Add '-4' on ordering code for 1-10V control gear *
 Luminaire luminous flux and connected electrical load - initial tolerance of $\pm 10\%$ (at ambient temperature of 25°C)