



### Installation For Plaster Ceilings

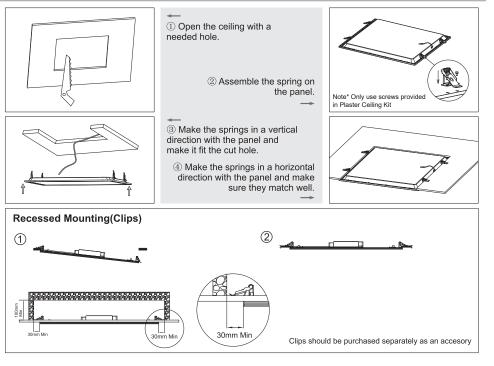


### Warning:

Input wire diameter  $\geq$ 0.75mm<sup>2</sup>; Product modification and improper installation are not valid for warranty! grace

BALANCE Installation Manual







# grace

#### Safety Instruction:

1. Turn off power b efore installation or b efore d oing any maintenance work.

2. Do not install any luminaire near a heat source.

3. For Indoor use.

4. Do not exceed the nominal supply voltage or amperage ratings.

5. All wiring and installation of this luminaire must adhere to local and national wiring rules eg AS/NZS 3000: 2007 Amendment 2:2012 Electrical Installation

6. Take care not to pull any electrical wires during unpacking as this may damage the connection.

7. Lay out all the components on a smooth su rface and make su re there are no components missing before assembling.

8. To avoid injury or damage to the fitting, please ensure that power leads and screws are secure before connecting the power. 9. Please keep instructions for future reference.

### Installation Procedure

### **WARNING:**

1.Switch off before installation.

2.Switch on only after complete installation and examination of the circuit.

# **A** CAUTION

Make sure that the mounting surface or structural member used for installation can support the weight of LED Panel.

## enabled, please select CCT with slide switch before installation.

If the luminare is CCT selectable

#### Lamp inspection before installation:


Remove panel form box and place on a flat surface:

- 1. Press down on opposite corners at the same time.
- Repeat with remaining corners. 2.
- 3. Insure the panel is flat before

installation


Corner lift tolerance ≤5mm

### Recessed



① Remove the ceiling plaster slab.


> 2 Feed the main AC wire in driver terminal block respectively, connect the panel light and driver.



🖼 RoHS 💩 🤇 E

③ Fix the panel light into

④ Make sure the led panel light is firmly fixed, turn on the power.



Turn Off

Power Supply


CW = 5700K

NW = 4000K

WW = 3000K

Ø





1) Fix the anchor into target place on the ceiling.




③ Hang the panel to ceiling with suspended installation kits, adjust the length of steel wires.


> ④ Feed the main AC wire in driver terminal block respectively, turn on the power.



### Surface mounted

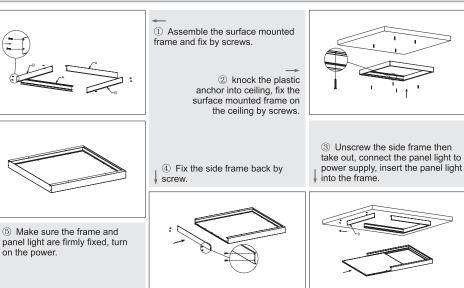

### Recessed with frame



① Open a hole on ceiling according to cutout size of recessed frame.

> ② Fix 2pcs of clips to one side of frame by screw, then insert the frame into ceiling.

