


grace


COMPOSE Lens/ Adjustable Installation Manual

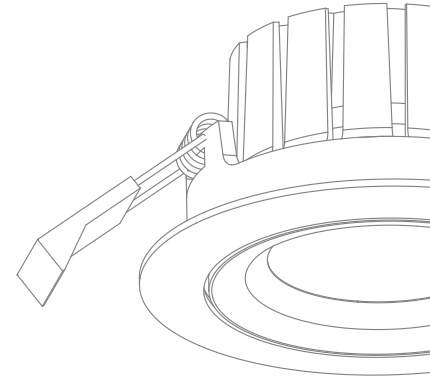

Safety Instruction:

1. Turn off power before installation or before doing any maintenance work.
2. Do not install any luminaire near a heat source.
3. For Outdoor and Indoor use.
4. Do not exceed the nominal supply voltage or amperage ratings.
5. All wiring and installation of this luminaire must adhere to local and national wiring rules eg AS/NZS 3000: 2007 Amendment 2:2012 Electrical Installation
6. Take care not to pull any electrical wires during unpacking as this may damage the connection.
7. Lay out all the components on a smooth surface and make sure there are no components missing before assembling.
8. To avoid injury or damage to the fitting, please ensure that power leads and screws are secure before connecting the power.
9. Please keep instructions for future reference.

Non IC-F Installation Instructions

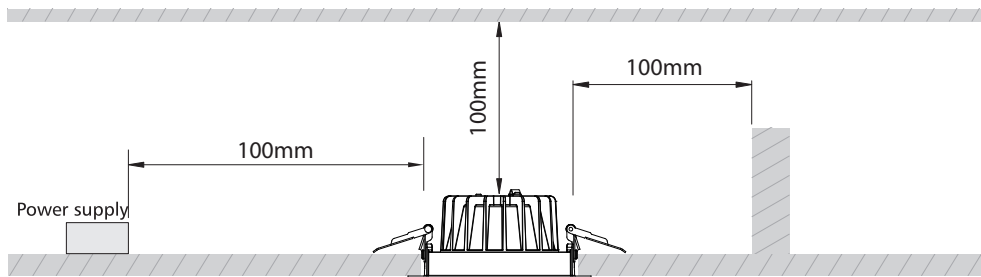



Do Not install through or directly onto joist, beam, rafter or ceiling batten
Drivers must not be installed under insulation

Side Clearance from heatsink to building element (e.g. timber, joist or batten) - SCB	100mm
Height Clearance from heatsink to building element (e.g. timber, joist or batten) - HCB	100mm
Minimum insulation clearance to building element - MIC	100mm

Recessed luminaires and their associated equipment may pose a risk of fire or damage to property if not installed and maintained correctly. Novii recommends a clearance of 100mm to building elements for optimum lifespan.

This data sheet contains information necessary to ensure compliance with the New Zealand Electrical Code of Practice for Installation and Maintenance of Recessed Luminaires and Associated Equipment AS/NZS 60598.2.2:2001

Installation Procedure

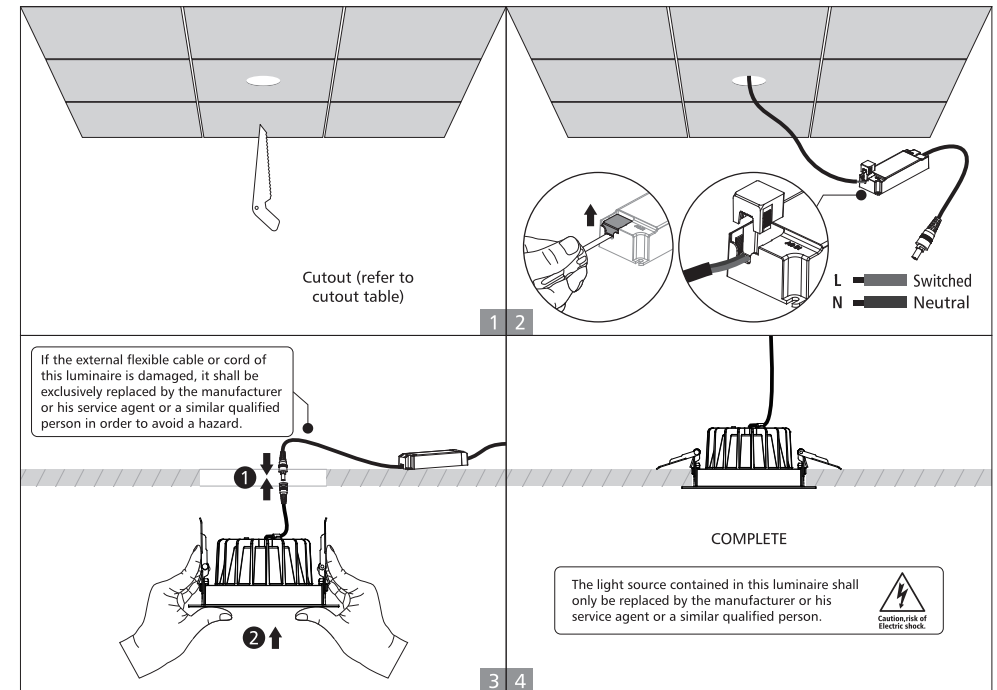

Model SKU	Diameter (mm)	Cutout (mm)	IP rating
G2-C1L	95	82-88	54
G2- C 2L	110	90-95	54
G2-C 3L	145	125-135	54
G2-C4L	172	150-165	54
G2-C5L	228	200- 210	54
G2-C1A	110	90-95	54
G2-C2A	120	100-110	54
G2-C3A	160	140-150	54