

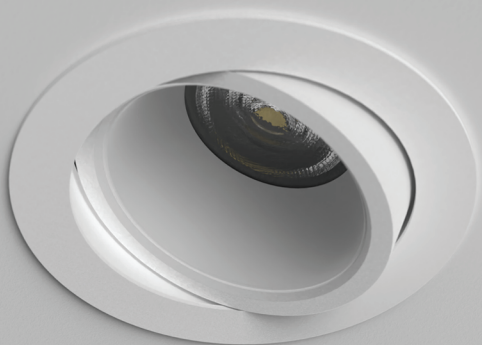





Compose Adjustable Lens

SKU	W	Lm @4000K	Tilt (T) Rotation (R) °	Cutout (mm)	Dimensions (mm)
G2-C1A10	10	1090	(T)20°	Ø 90-95	
G2-C2A13	13	1305	(T)20°	Ø 100-110	
G2-C3A10	10	1130	(T)20°	Ø 140-150	
G2-C3A18	18	1975	(T)20°	Ø 140-150	
G2-C3A25	25	2825	(T)20°	Ø 140-150	



Physical

Housing PC/Aluminium

Reflector Finish Black, White, Silver, Matte Silver

Trim Finish White, Black

Mounting Type Recessed

Electrical

Voltage


AC 220-240v 50/60Hz

Control

Non-dimmable, Triac, 1-10V, DALI

Optical

Beam Angle



CCT 2700, 3000, 4000, 5000K

CRI 90, 97CRI

SDCM 3

UGR < 19

Efficiency >100lm/W @4000K

Certification

Warranty 5 years

Lifetime L90 54,000Hrs

Category

AS/NZS 60598.2.2A

