



GLARE CONTROL

LIGHTING CONTROL

FLICKER MANAGEMENT



Compose Lens SM

SKU	W	Lm @4000K/@80CRI	Tilt (T) Rotation (R) °	Dimensions (mm)
G2-CSML15	15	1650	Fixed	
G2-CSML25	25	2600	Fixed	
G2-CSML35	35	3600	Fixed	



Physical

Housing Aluminium

Reflector Finish Faceted Silver

Trim Finish White, Black

Mounting Type Surface Mounted

Electrical

Voltage


AC 220-240 50/60Hz

Control

Non-dimmable, Triac, DALI

Optical

Beam Angle



CCT 2700, 3000, 4000, 5700K

CRI 80, 90

UGR < 19

Efficiency 100-110lm/W

Certification

Warranty 5 years

Category


AS/NZS 60598.2.1

TM21 report on request



SKU	Accessories
-----	-------------

G2-CSML15-SUS4 Suspension Kit

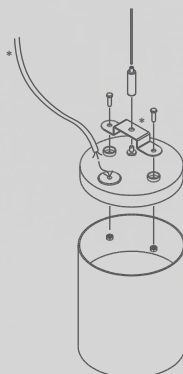

*3/5 core Flex cable supplied separately

*Bracket can also be used with 6mm threaded rod