


Lightbox LED

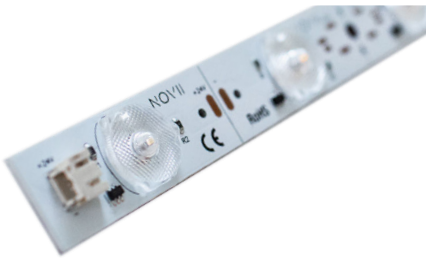

Physical

Material Rigid MCPCB
Trim finish White
Mounting type
 Surface mounted
 via screw & 3M Tape

Electrical

Voltage
 24VDC
Control Non-dimmable,
 Triac, 1-10V, DALI


Optical

Beam angle 120°
CCT 2000, 2200, 2500,
 2700, 3000, 3500, 4000,
 5000, 6000K
CRI 80, 90
Efficiency 138lm/W
SDCM 3

Certification

Warranty 5 years
Category IP20
Lifetime L70B10 >50000 Hrs
 AS/NZS 60598.2.1

Features



Ultra wide beam angle



Long Runs



High Efficiency

Product Specification

SKU	Wattage (per m)	Lumen Output (/m, @80CRI) (3000K)	LED/m	Cutttable (every mm)	Dimensions LxWxH mm	Length (/power feed)	Technical Drawing
F3-LSL2	6.5W	900lm	20	50	1000 x 18 x 7.2	10m	