


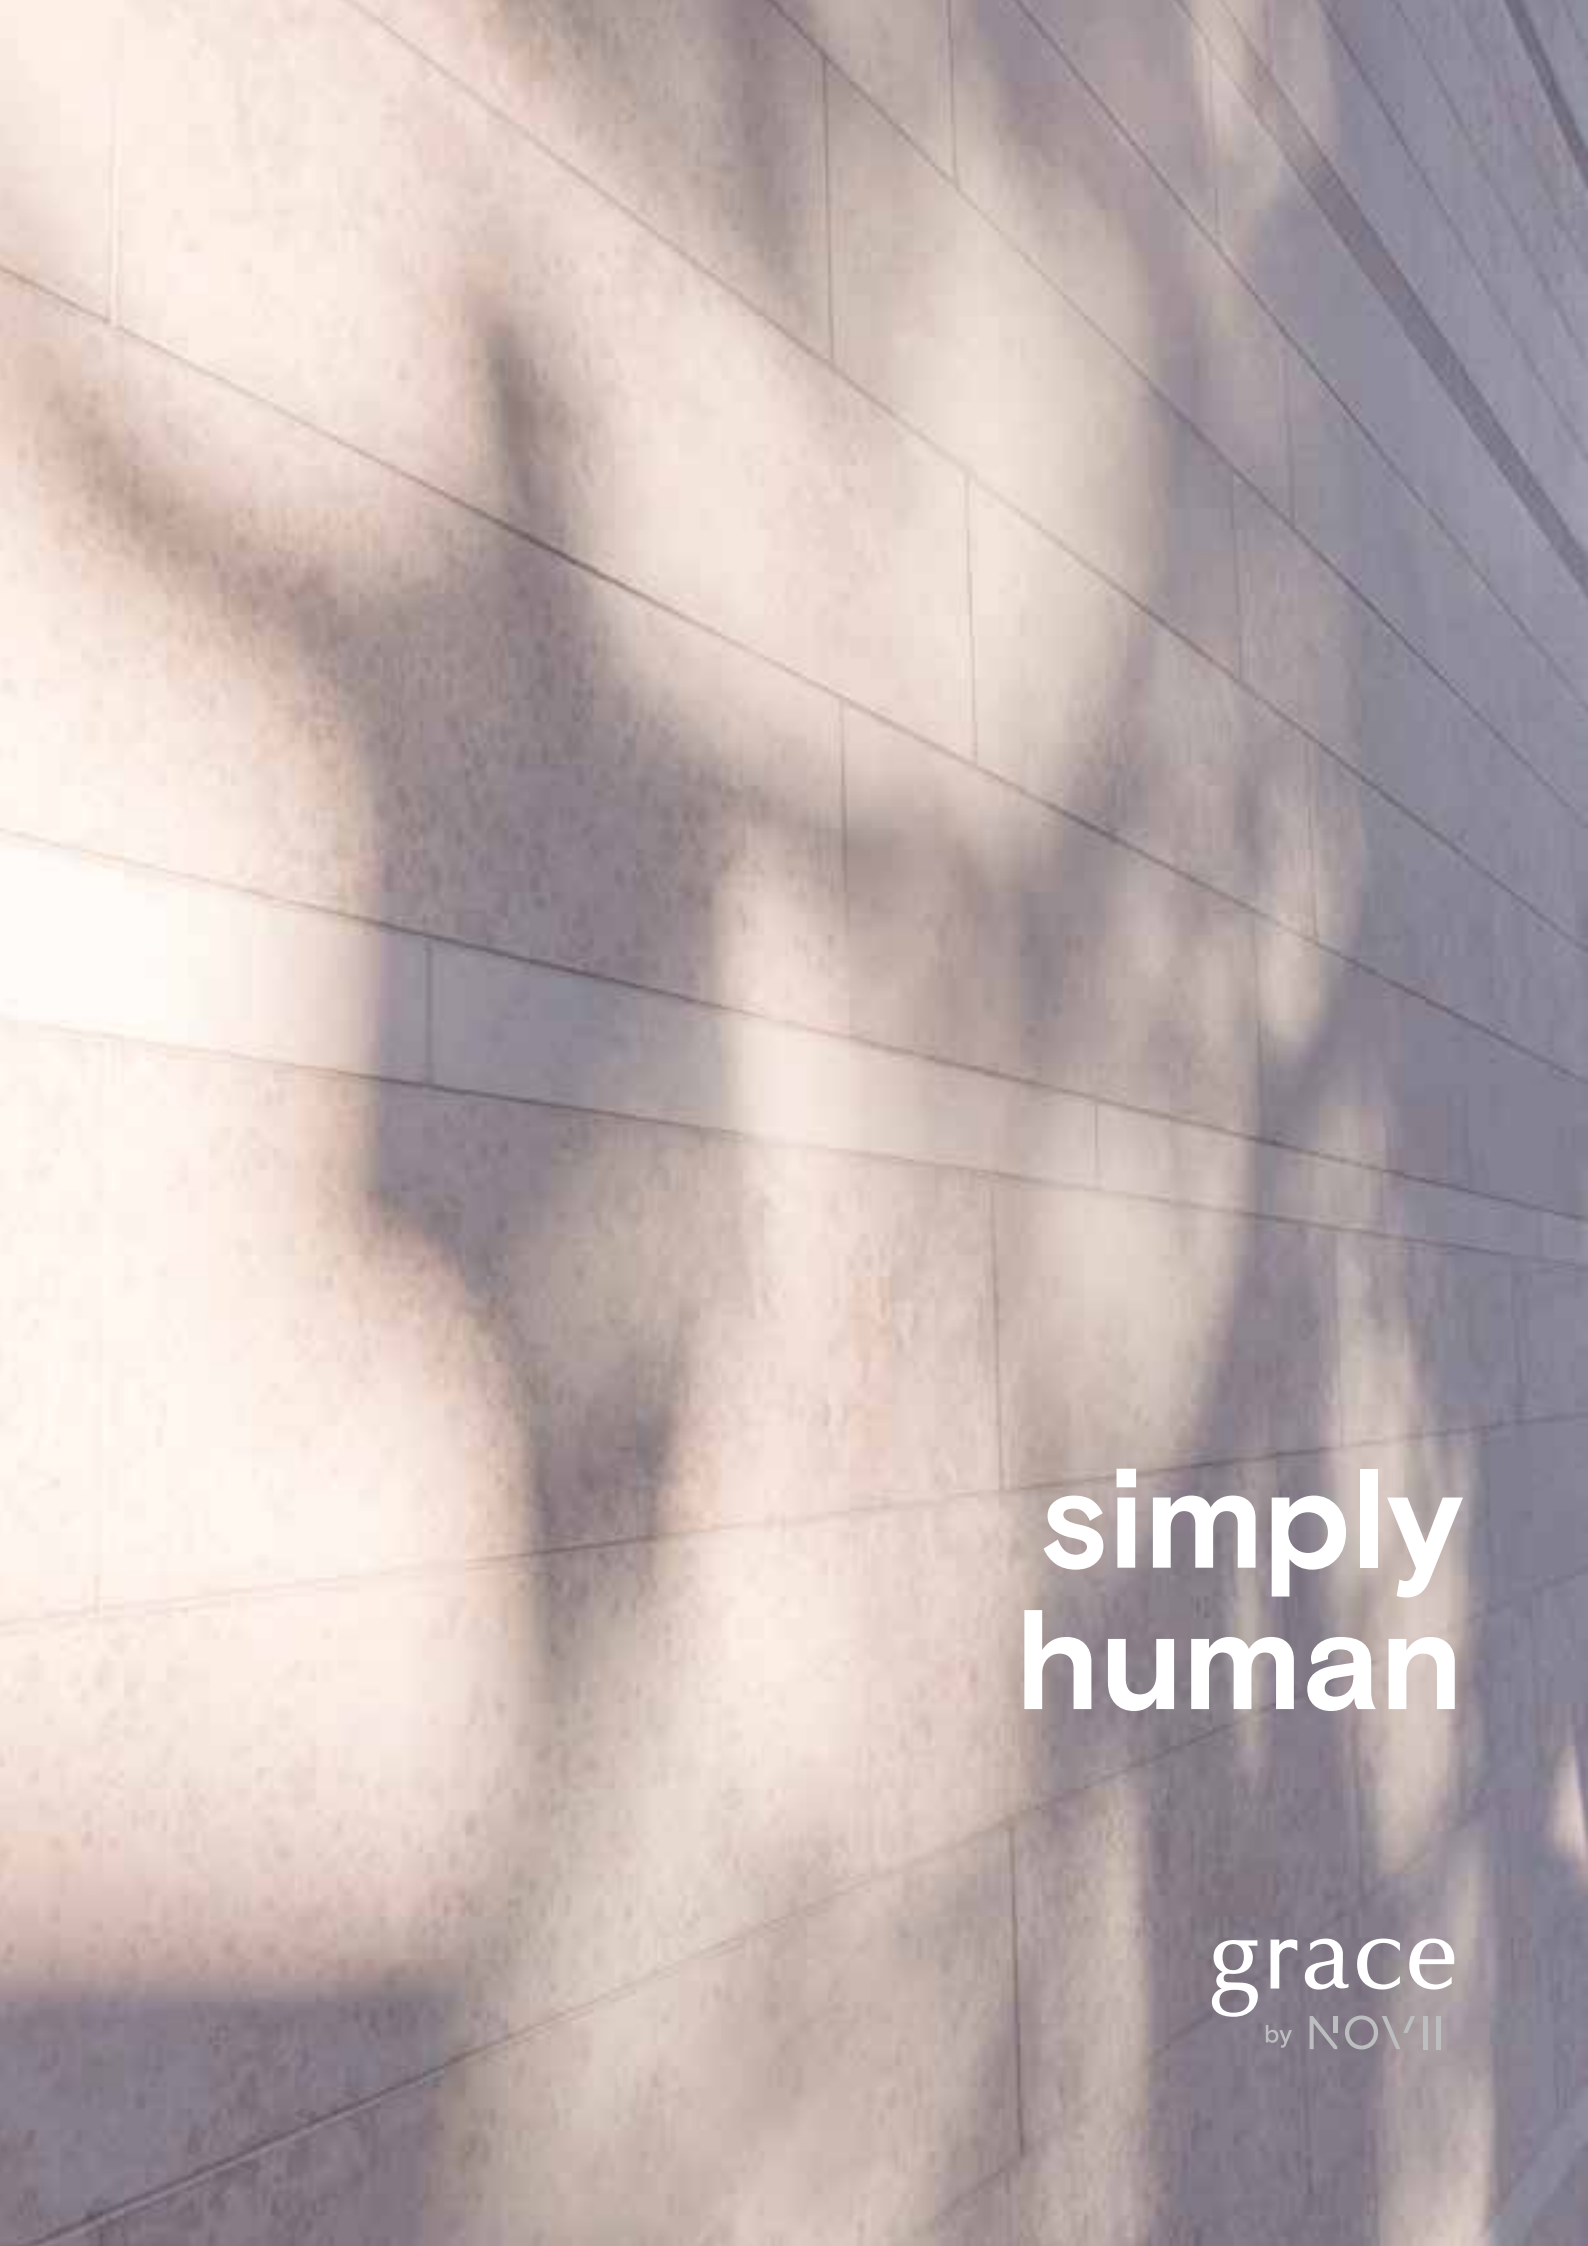

**simply
human**

grace
by NOVII

A photograph of two young women with long, wavy brown hair, smiling and looking off-camera to the right. They are wearing light-colored, textured sweaters. The background is a blurred interior space, likely a library or bookstore, with tall wooden bookshelves filled with books. A large window on the left shows a view of green trees outside. The lighting is soft and warm, creating a pleasant atmosphere.


Feel the light

Spaces aren't merely spaces. They are places to gather, learn, create, focus, and escape. Light plays an emotional role in those places, shaping the way people feel and experience them. And it also plays a physical role. Light impacts more than our emotions – it can enhance our health and wellbeing.



4

6

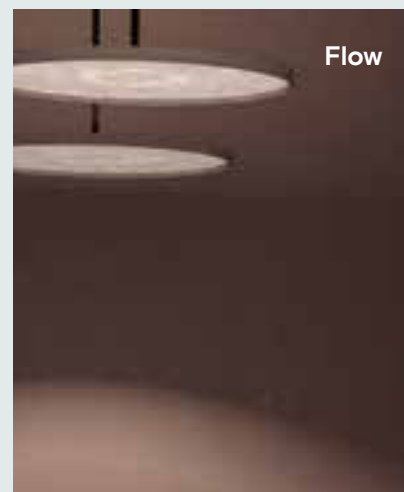


28

shape the
mood



18

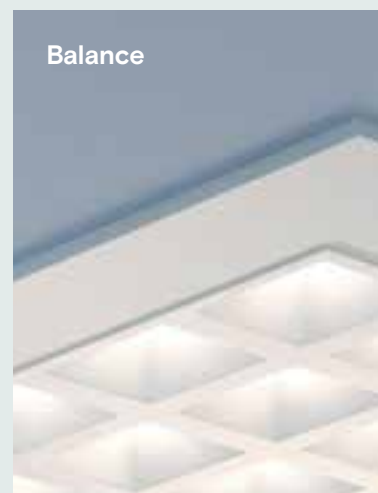

36



46

Human technology

Experience, ultimately, is everything. The Grace range gives specifiers the tools to shape spaces that enhance human wellness. Just as a painter's many different brushes allow them to create a myriad of effects, the Grace range can create the right light for the right space, to make it human in all the right ways.

Grace is human technology, designed for a more human experience.

Every Grace product is designed for human wellbeing. We assess each product against five key wellness standards, which impact how well it enhances the human experience of a space.

GLARE CONTROL



Excessive glare can cause fatigue, visual discomfort, headaches and migraines. Good glare control through the use of optics, baffling and indirect light make spaces more comfortable and enjoyable.

CIRCADIAN RHYTHM



The human body uses light to regulate waking and sleeping. Lighting designed to work with the body's circadian rhythms can enhance daytime alertness and evening relaxation.

NATURAL LIGHT



The naturalness of a light source is critical in developing human-centric lighting solutions. Luminaires enabled with 'natural light' render colours and materials that are perfectly balanced.

LIGHTING CONTROL




Innovative lighting control allows people to adjust the lighting of a space to suit the time of day, activity and mood they want to enjoy.

FLICKER MANAGEMENT



Imperceptible flicker is not consciously perceived but may still have biological or even health effects on humans. Managing flicker creates a calming and more focused space.

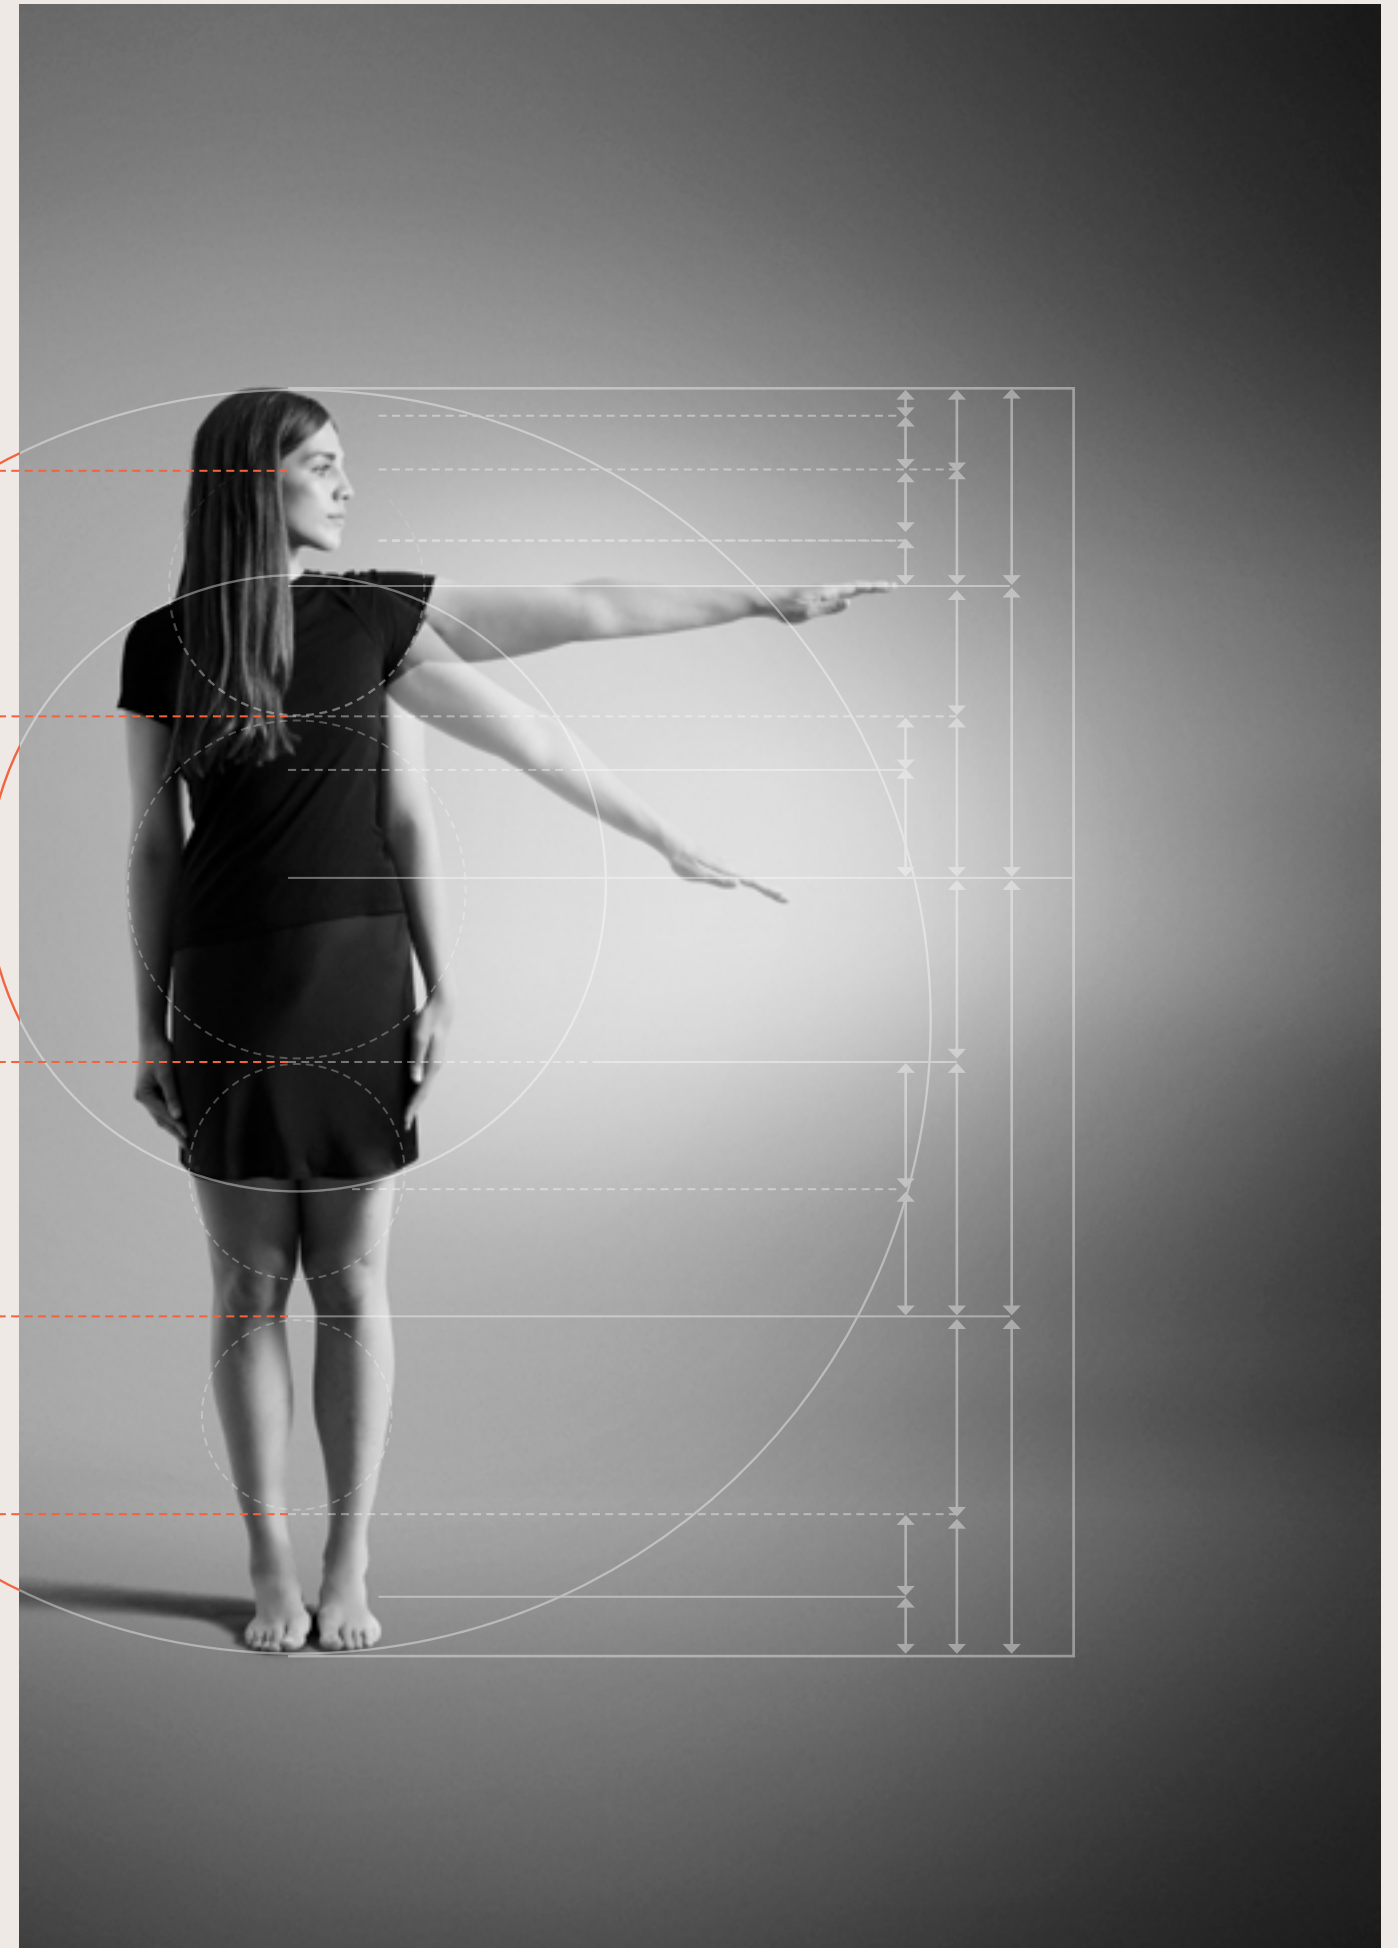



GLARE CONTROL

NATURAL LIGHT


LIGHTING CONTROL

FLICKER MANAGEMENT

Thrive



Thrive

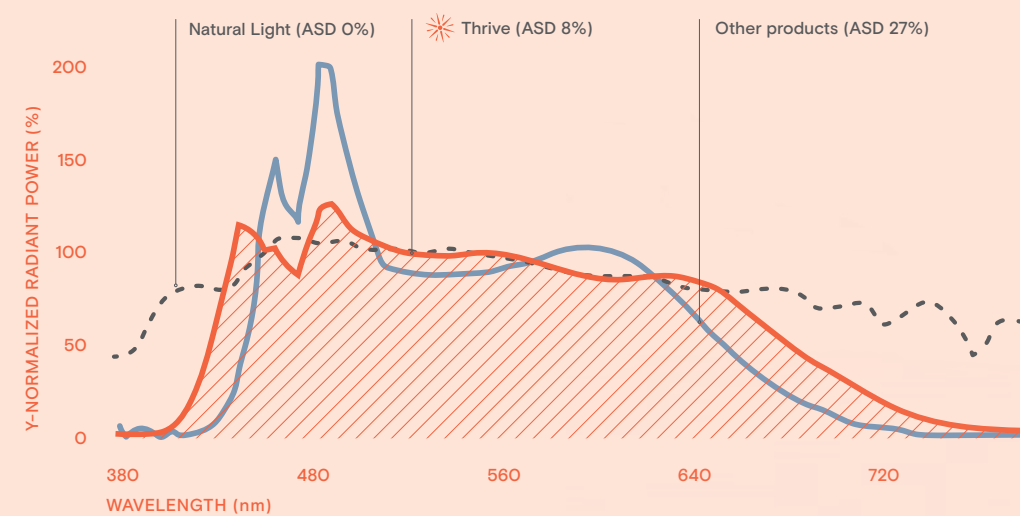

This series of downlights uses Bridgelux Thrive technology designed to best match the spectra of natural light.

The Average Spectral Difference (ASD) quantifies the naturalness of a light source and in doing so offers human-centric lighting solutions.

human centric





Thrive

Reflector


Physical

Housing Aluminium
Reflector Finish Black, Specular Silver, Matte Silver
Trim Finish White, Black
Mounting Type Trimless, Recessed

Electrical

Voltage AC 220-240v 50/60Hz
Control Non-dimmable, Triac, 1-10V, DALI

Optical



CCT 2700, 3000, 4000, 5000K
CRI 90, Thrive*
UGR < 19
Efficiency 70-100lm/W

Certification

Warranty 5 years
Category AS/NZS 60598.2.2A
TM21 report on request



SKU	W	Lm @4000K/@90CRI/55°	Tilt (T) Rotation (R) °	Cutout (mm)	Dimensions (mm)
G2-TR12TA	12W	840	30°T 355°R	Ø 76	30° 112 71 355°
G2-TR12T	12W	840	Fixed	Ø 76	112 71
G2-TR12RA	12W	840	30°T 355°R	Ø 75	30° 112 85 355°
G2-TR12R	12W	840	Fixed	Ø 75	112 85
G2-TR12SA	12W	840	30°T	Ø 75	30° 112 85
G2-TR12RA2	12W	1020	30°T 355°R	Ø 95	30° 95 104 355°
G2-TR12RA3	12W	1020	30°T 355°R	Ø 95	30° 109 108 355°
G2-TR24RA	24W	2198	30°T 355°R	Ø 100	30° 140 115 355°

SKU	W	Lm @4000K/@90CRI/55°	Tilt (T) Rotation (R) °	Cutout (mm)	Dimensions (mm)
G2-TR24R	24W	2161	Fixed	Ø 100	140 115
G2-TR24SA	24W	2156	25°T	Ø 100	25° 140 115
G2-TR24RA2	24W	2472	30°T 355°R	Ø 110	30° 117 125 355°
G2-TR24RA3	24W	2332	30°T 355°R	Ø 110	30° 137 125 355°
G2-TR33RA	33W	2784	25°T 355°R	Ø 125	25° 169 140 355°
G2-TR33R	33W	2848	Fixed	Ø 125	169 140
G2-TR33SA	33W	2795	25°T	Ø 125	25° 169 140
G2-TR33RA2	24W	3292	30°T 355°R	Ø 130	30° 138 145 355°
G2-TR33RA3	33W	2996	30°T 355°R	Ø 130	30° 164 145 355°

* Only 12W * Above 12W


Bridgelux Thrive LED technology

* Thrive LED specifications available on request



Thrive

Optical

SKU	W	Lm @4000K/@90CRI/38°	Tilt (T) Rotation (R) °	Cutout (mm)	Dimensions (mm)
G2-TO12P	12W	824	Fixed	Ø 75	
G2-TO12GR	12W	972	23°T	Ø 75	
G2-TO12SP	12W	830	Fixed	Ø 75	
G2-TO12SW	12W	869	23°T	Ø 75	
G2-TO12RAW	12W	977	23°T	Ø 90	
G2-TO12RA	12W	1089	15°T	Ø 70	
G2-TO12SA	12W	1089	15°T	Ø 70	
G2-TO12R (IP54)	12W	920	Fixed	Ø 75	

IC-F CE RoHS  Bridgelux Thrive LED Technology

* Thrive LED specifications available on request


Physical

Housing Aluminium
Trim Finish White, Black
Mounting Type Recessed

Electrical

Voltage
AC 220-240v 50/60Hz
Control
Non-dimmable, Triac,
1-10V, DALI

Optical


Beam Angle

15° 24° 38° 55°
CCT 2700, 3000, 4000, 5000K
CRI 90, Thrive*
UGR < 19
Efficiency 70-91lm/W

Certification

Warranty 5 years
Category
AS/NZS 60598.2.2A
TM21 report on request



IP20

SKU	W	Lm @4000K/@90CRI/50°	Tilt (T) Rotation (R) °	Cutout (mm)	Dimensions (mm)
G2-TN9	9W	563	Fixed	Ø 55	
G2-TN12	12W	1221	Fixed	Ø 65	
G2-TN22	22W	2141	Fixed	Ø 90	

IC-F CE RoHS  Bridgelux Thrive LED Technology

* Thrive LED specifications available on request



Thrive

Nano


Physical

Housing Aluminium
Reflector Finish Black,
Specular Silver, Matte Silver
Trim Finish White, Black
Mounting Type Recessed

Electrical

Voltage
AC 220-240v 50/60Hz
Control
Non-dimmable, Triac,
1-10V, DALI

Optical

Beam Angle (refer to datasheets for 9W/12W)

15° 24° 38° 55°
CCT 2700, 3000, 4000, 5000K
CRI 90, Thrive*
UGR < 19
Efficiency 63-100lm/W

Certification


Warranty 5 years
Category
AS/NZS 60598.2.2A
TM21 report on request



IP20



Thrive Gyro

SKU	W	Lm @4000K/@90CRI/55°	Tilt (T) Rotation (R) °	Cutout (mm)	Dimensions (mm)
G2-TP12RA	12W	905	25°T 350°R	Ø 80	 
G2-TP12SA	12W	912	25°T 350°R	Ø 80	 
G2-T2P12RA	2 x 12W	2 x 905	25°T 350°R	80 x 165	 
G2-TP24RA	24W	2414	20°T 355°R	Ø 95	 
G2-TP24SA	24W	2482	20°T 355°R	Ø 95	 
G2-T2P24RA	2 x 24W	2 x 2414	20°T 355°R	95 x 205	 
G2-TP33RA	33W	3285	20°T 355°R	Ø 115	 
G2-TP33SA	33W	3178	20°T 355°R	Ø 115	 
G2-T2P33RA	2 x 33W	2 x 3285	20°T 355°R	115 x 245	 



* Thrive LED specifications available on request

Physical

Housing Aluminium
Trim Finish White, Black
Mounting Type Recessed

Electrical

Voltage AC 220-240v 50/60Hz
Control Non-dimmable, Triac, 1-10V, DALI

Optical

Beam Angle

CCT 2700, 3000, 4000, 5000K
CRI 90, Thrive*
UGR < 19
Efficiency 75-100lm/W

Certification

Warranty 5 years
Category AS/NZS 60598.2.2A
TM21 report on request



IP20



Thrive Adjustable SM

Physical

Housing Aluminium
Reflector Finish Black, White
Trim Finish White, Black
Mounting Type Surface Mounted

Electrical

Voltage AC 220-240v 50/60Hz
Control Non-dimmable
Triac, 1-10V, DALI (24-33W Only)

Optical

Beam Angle

CCT 2700, 3000, 4000, 5000K
CRI 90, Thrive*
UGR < 19
Efficiency 70-104lm/W

Certification

Warranty 5 years
Category AS/NZS 60598.2.1
TM21 report on request



IP20

SKU	W	Lm @4000K/@90CRI/55°	Tilt (T) Rotation (R) °	Dimensions (mm)
G2-TSM12RA	12W	850	25°T 350°R	 
G2-TSM12SA	12W	850	25°T 350°R	 
G2-TSM24RA	24W	2496	25°T 350°R	 
G2-TSM24SA	24W	2393	25°T 350°R	 
G2-TSM33RA	33W	3174	25°T 350°R	 
G2-TSM33SA	33W	3091	25°T 350°R	 



* Thrive LED specifications available on request





Thrive

Reflector SM/P

SKU	W	Lm @4000K/@90CRI/55°	Tilt (T) Rotation (R) °	Dimensions (mm)	
G2-TSM12R	12W	1012	25°T 350°R		
G2-TSM12S	12W	987	25°T 350°R		
G2-TSM12H	12W	1021	25°T 350°R		
G2-TPP12R	12W	982	25°T 350°R		
G2-TPP12S	12W	978	25°T 350°R		
G2-TPP12H	12W	971	25°T 350°R		

CE RoHS



Bridgelux Thrive
LED Technology

* Thrive LED specifications
available on request

Physical

Housing Aluminium

Reflector Finish Black,
Specular Silver, Matte Silver

Trim Finish White, Black

Mounting Type

Surface Mounted, Suspended

Electrical

Voltage

AC 220-240v 50/60Hz

Control

Non-dimmable

Optical

Beam Angle



CCT 2700, 3000, 4000,
5000K

CRI 90, Thrive*

UGR < 19

Efficiency 70-104lm/W

Certification

Warranty 5 years

Category

AS/NZS 60598.2.1

TM21 report on request



IP20

feel
the light


- GLARE CONTROL
- CIRCADIAN RHYTHM
- LIGHTING CONTROL
- FLICKER MANAGEMENT



Compose



Compose

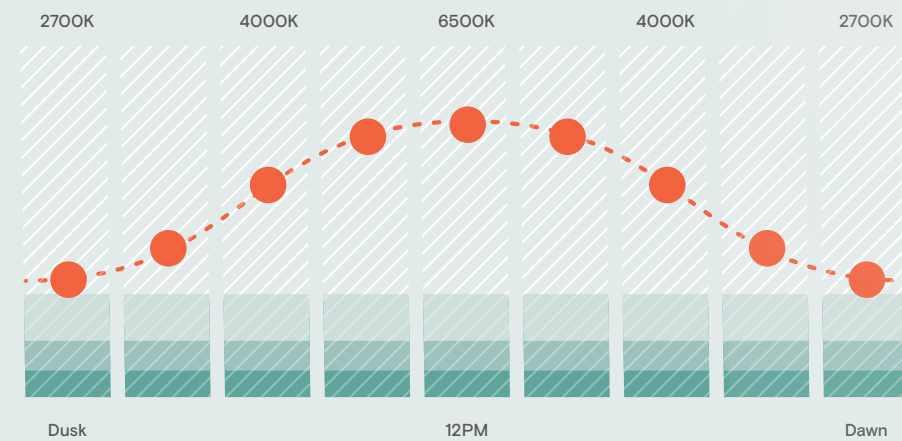

The human body uses light to regulate waking and sleeping.

The Compose range of downlights integrate technology designed to work with the body's circadian rhythms which can enhance daytime alertness and evening relaxation.



creative rhythm



Compose

Lens

SKU	W	Lm @4000K/@80CRI/60°	Tilt (T) Rotation (R)°	Cutout (mm)	Dimensions (mm)
G2-C1L10	10	900	Fixed	Ø 82-88	
G2-C2L13	13	1200	Fixed	Ø 90-95	
G2-C3L10	10	1150	Fixed	Ø 125-135	
G2-C3L18	18	2100	Fixed	Ø 125-135	
G2-C3L25	25	2700	Fixed	Ø 125-135	
G2-C4L18	18	2100	Fixed	Ø 150-165	
G2-C4L25	25	2700	Fixed	Ø 150-165	
G2-C4L35	35	3500	Fixed	Ø 150-165	
G2-C5L18	18	2100	Fixed	Ø 200-210	
G2-C5L25	25	2700	Fixed	Ø 200-210	
G2-C5L35	35	3700	Fixed	Ø 200-210	
G2-C5L45	45	4200	Fixed	Ø 200-210	



* Only < 13W


Physical

Housing PC/Aluminium
Reflector Finish Black, White, Faceted Silver, Matte Silver
Trim Finish White, Black
Mounting Type Recessed

Electrical

Voltage AC 220-240v 50/60Hz
Control Non-dimmable, Triac, 1-10V, DALI

Optical



CCT 2700, 3000, 4000, 5000K
CRI 80, 90
UGR < 19
Efficiency 90-115lm/W

Certification

Warranty 5 years
Category AS/NZS 60598.2.2A
TM21 report on request



IP54 IK06

SKU	W	Lm @4000K/@80CRI	Tilt (T) Rotation (R) °	Cutout (mm)	Dimensions (mm)
G2-C1D10	10	700	Fixed	Ø 82-88	
G2-C2D13	13	900	Fixed	Ø 90-95	
G2-C3D10	10	800	Fixed	Ø 125-135	
G2-C3D18	18	1600	Fixed	Ø 125-135	
G2-C3D25	25	2000	Fixed	Ø 125-135	
G2-C4D18	18	1700	Fixed	Ø 150-165	
G2-C4D25	25	2200	Fixed	Ø 150-165	
G2-C4D35	35	2870	Fixed	Ø 150-165	
G2-C5D18	18	1760	Fixed	Ø 200-210	
G2-C5D25	25	2350	Fixed	Ø 200-210	
G2-C5D35	35	3650	Fixed	Ø 200-210	
G2-C5D45	45	4360	Fixed	Ø 200-210	



* Only < 13W



Tunable White
Technology

* Tunable White specifications
available on request



Compose

Diffuse

Physical

Housing PC/Aluminium
Reflector Finish Black, White, Specular Silver, Matte Silver
Trim Finish White, Black
Mounting Type Recessed

Electrical

Voltage AC 220-240v 50/60Hz
Control Non-dimmable, Triac, 1-10V, DALI, TW (DALI DT8)

Optical


Beam angle



CCT 2700K, 3 CCT Switch (3000, 4000, 5700K), 2700-6500K (Tunable White)*
CRI 80, 90
UGR < 19
Efficiency 70-106lm/W

Certification

Warranty 5 years
Category AS/NZS 60598.2.2A
TM21 report on request



IP54 IK06



Compose

Lens SM

SKU	W	Lm @4000K/@80CRI/60°	Tilt (T) Rotation (R) °	Dimensions (mm)
G2-CSML15	15	1650	Fixed	
G2-CSML25	25	2600	Fixed	
G2-CSML35	35	3600	Fixed	



Physical

Housing PC/Aluminium
Reflector Finish Faceted Silver
Trim Finish White, Black
Mounting Type Surface Mounted

Electrical

Voltage
AC 220-240v 50/60Hz
Control
Non-dimmable, Triac

Optical

Beam Angle

24° 36° 60°

CCT 2700, 3000, 4000, 5700K
CRI 80, 90
UGR < 19
Efficiency 100-110lm/W

Certification

Warranty 5 years
Category
AS/NZS 60598.2.1
TM21 report on request



simplicity &
precision

light well

Light is a paradox. It's intangible, yet it is as important as any solid material in a designer's palette. It can be shaped, but it also shapes, defining space and human experiences.



GLARE CONTROL
CIRCADIAN RHYTHM
LIGHTING CONTROL
FLICKER MANAGEMENT

Flow

Flow

light &
emotion





Flow Round

SKU	W	Lm @4000K/@80CRI	Light Distribution	Dimensions (mm)	
G2-FR40D	40W	4000	Direct	400	86
				219	400
G2-FR40I	40W	4000	Direct/Indirect	400	86
				219	400
G2-FR60D	60W	6000	Direct	600	86
				329	600
G2-FR60I	60W	6000	Direct/Indirect	600	86
				329	600
G2-FR80D	80W	8000	Direct	800	86
				438	800
G2-FR80I	80W	8000	Direct/Indirect	800	86
				438	800
G2-FR100D	100W	10000	Direct	1000	86
				548	1000
G2-FR100I	100W	10000	Direct/Indirect	1000	86
				548	1000

CERoHS



 Tunable White Technology

* Tunable White specifications available on request

SKU	Accessories
G2-FRSUS	Suspension Kit
G2-FRWHS	Harness Suspension Kit
G2-FRPRS	Rod Suspension (only for 40W & 60W)

Physical

Housing Aluminium

Trim Finish White, Black, Custom colours on request

Optics Microprismatic

Mounting Type

Surface Mounted, Suspended

Electrical

Voltage

AC 220-240v 50/60Hz

Control

Non-dimmable, DALI, TW (DALI DT8)

Optical

Beam Angle



90°

CCT 2700, 3000, 4000, 5700K
2700-6500K (Tunable White)*

CRI 80, 90

UGR < 19

Efficiency 100lm/W

Certification

Warranty 5 years

Category

AS/NZS 60598.2.1
TM21 report on request



IP40

SKU	W	Lm @4000K/@80CRI	Light Distribution	Dimensions (mm)	
G2-FR40DB	40W	4000	Direct	400	100
				219	400
G2-FR40IB	40W	4000	Direct/Indirect	400	100
				219	400
G2-FR60DB	60W	6000	Direct	600	100
				329	600
G2-FR60IB	60W	6000	Direct/Indirect	600	100
				329	600
G2-FR80DB	80W	8000	Direct	800	100
				438	800
G2-FR80IB	80W	8000	Direct/Indirect	800	100
				438	800
G2-FR100DB	100W	10000	Direct	1000	100
				548	1000
G2-FR100IB	100W	10000	Direct/Indirect	1000	100
				548	1000

CERoHS



 Tunable White Technology

* Tunable White specifications available on request



Flow Baffle

Physical

Housing Aluminium

Trim Finish White, Black, Custom colours on request

Optics Microprismatic

Mounting Type

Surface Mounted, Suspended

Electrical

Voltage

AC 220-240v 50/60Hz

Control

Non-dimmable, DALI, TW (DALI DT8)

Optical

Beam Angle



90°

CCT 2700, 3000, 4000, 5700K
2700-6500K (Tunable White)*

CRI 80, 90

UGR < 19

Efficiency 100lm/W

Certification

Warranty 5 years

Category

AS/NZS 60598.2.1
TM21 report on request



IP40

SKU	Accessories
G2-FRSUS	Suspension Kit
G2-FRWHS	Harness Suspension Kit
G2-FRPRS	Rod Suspension (only for 40W & 60W)



Light to shape human rhythm

Light makes us feel. It falls into rhythm
with us. Used well, it makes us well.

- GLARE CONTROL
- CIRCADIAN RHYTHM
- LIGHTING CONTROL
- FLICKER MANAGEMENT




Balance



All Balance panels offer UGR <19 through a range of aesthetics.


Good glare control through the use of optics, baffling and indirect light make spaces more comfortable and enjoyable.

Balance

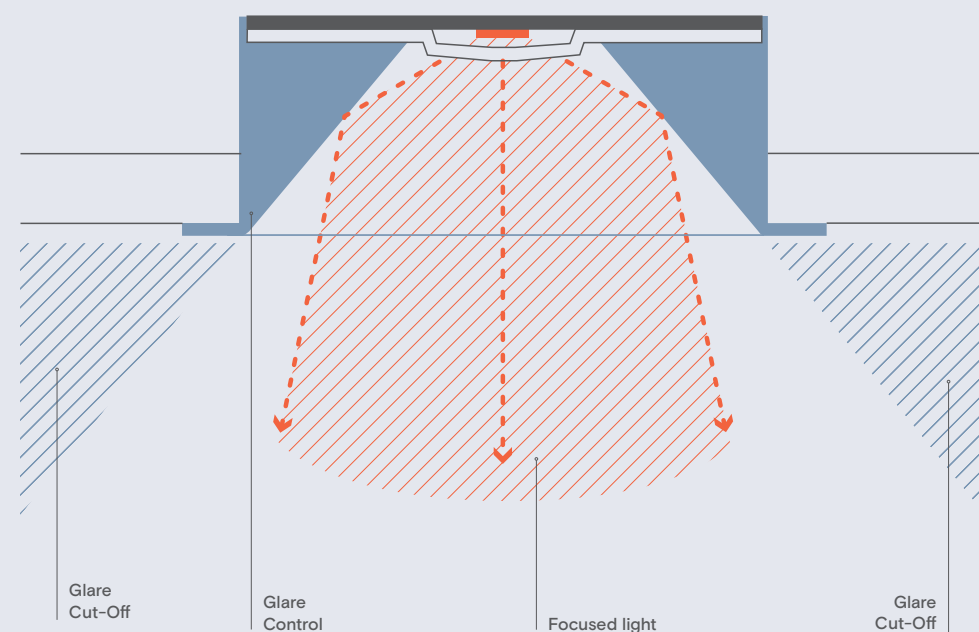

invisible power

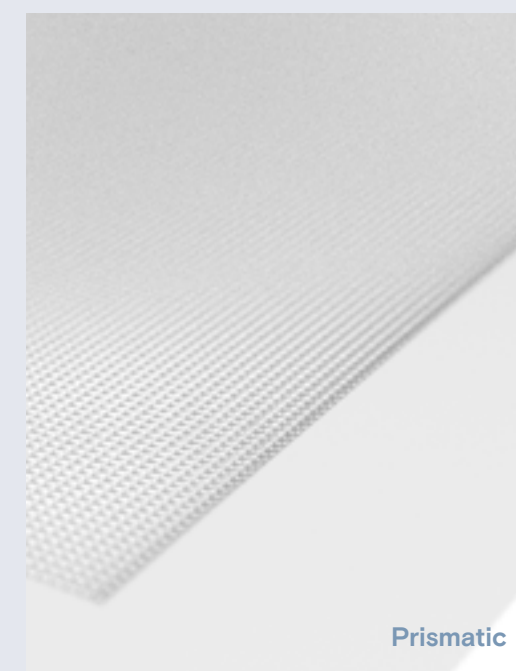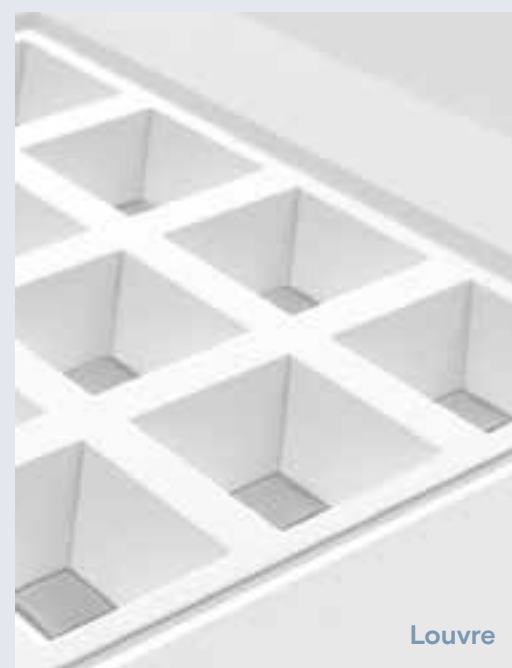

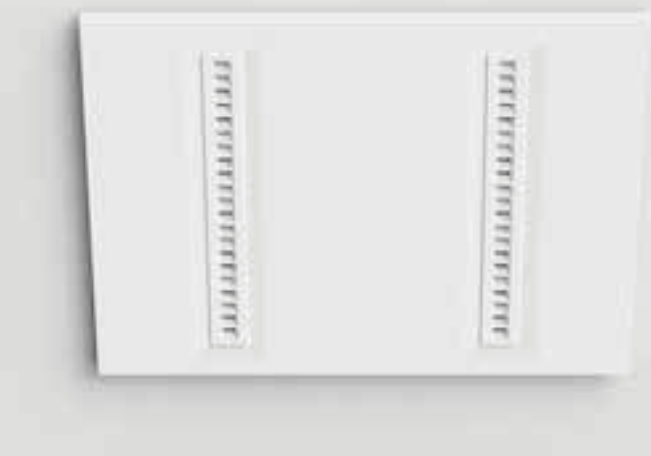

Balance Micro

SKU	W	Lm @4000K/@80CRI	Cutout (mm)	Dimensions (mm)
TW G2-BM35SP	35	4035	580 x 580	595
				595
TW G2-BM35MP	35	4035	280 x 1180	1195
				295

CERoHS

Tunable White Technology

* Tunable White specifications available on request

SKU	Accessories
G2-BRK	Recessed Kit for 1195 x 295 / 595 x 595
G2-BSM-SP	Surface Mount Kit for 595 x 595
G2-BSM-MP	Surface Mount Kit for 1195 x 295
G2-BSUS	Suspension Kit for Balance 1195 x 295 / 595 x 595

Physical
Housing Aluminium
Trim Finish White
Mounting Type Recessed, Surface Mounted, Suspended

Electrical
Voltage AC 220-240v 50/60Hz
Control Non-dimmable, Triac, 1-10V, DALI, TW (DALI DT8)

Optical
Beam Angle

90°

CCT 2700, 3000, 4000, 5700K
2700-6500K (Tunable White)*
CRI 80, 90
UGR < 19
Efficiency 94lm/W

Certification
Warranty 5 years
Category AS/NZS 60598.2.2A
TM21 report on request



SKU	W	Lm @4000K/@80CRI	Cutout (mm)	Dimensions (mm)
G2-BP16SSP	16	1760	280 x 580	595
				295
G2-BP30SP	30	3300	580 x 580	595
				595
G2-BP36SP	36	3960	580 x 580	595
				595
G2-BP30MP	30	3300	280 x 1180	1195
				295
G2-BP36MP	36	3960	280 x 1180	1195
				295
G2-BP50LP	50	5500	580 x 1180	1195
				595



SKU	Accessories
G2-BSM-SSP	Surface Mount Kit for 295 x 595
G2-BSM-SP	Surface Mount Kit for 595 x 595
G2-BSM-MP	Surface Mount Kit for 1195 x 295
G2-BSM-LP	Surface Mount Kit for 1195 x 595
G2-BRK	Recessed Kit for 1195 x 295 / 595 x 595 / 295 x 595
G2-BRK-LP	Recessed Kit for 1195 x 595
G2-BSUS	Suspension Kit for 1195 x 295 / 595 x 595 / 295 x 595
G2-BSUS-LP	Suspension Kit for 1195 x 595



Balance Prismatic

Physical
Housing Aluminium
Trim Finish White
Mounting Type Recessed, Surface Mounted, Suspended

Electrical
Voltage AC 220-240v 50/60Hz
Control Non-dimmable, Triac, 1-10V, DALI

Optical
Beam Angle

90°

CCT 2700, 3000, 4000, 5000K
CRI 80, 90
UGR < 19
Efficiency 110lm/W

Certification
Warranty 5 years
Category AS/NZS 60598.2.2A
TM21 report on request





Balance

Louvre

SKU	W	Lm @4000K/@80CRI	Cutout (mm)	Dimensions (mm)
TW G2-BL18SSP	18	2520	280 x 580	595 295 36
TW G2-BL25SP	25	3500	580 x 580	595 595 36
TW G2-BL25MP	25	3500	280 x 1180	1195 295 36

CE RoHS



TW Tunable White Technology

* Tunable White specifications available on request

SKU	Accessories
G2-BLRK	Recessed Kit for 1195 x 295 / 595 x 595 / 595 x 295
G2-BSM-SSP	Surface Mount Kit for 595 x 295
G2-BSM-SP	Surface Mount Kit for 595 x 595
G2-BSM-MP	Surface Mount Kit for 1195 x 295
G2-BSUS	Suspension Kit for 1195 x 295 / 595 x 595 / 595 x 295

Physical

Housing PC/SPCC

Trim Finish White

Mounting Type Recessed, Surface Mounted, Suspended

Electrical

Voltage

AC 220-240v 50/60Hz

Control

Non-dimmable, Triac, 1-10V, DALI, TW (DALI DT8)

Optical

Beam Angle



100°

CCT 2700, 3000, 4000, 5700K
2700-6500K (Tunable White)*

CRI 80, 90

UGR < 16

Efficiency 140lm/W

Certification

Warranty 5 years

Category

AS/NZS 60598.2.2A

TM21 report on request



IP40

human experience

Light shaping wellness

The beauty of Grace the range lies not just in its simplicity and precision. We are just as curious about this invisible power to shape the mood of a space and the health of a human as we are about the function and performance of our product.

GLARE CONTROL
LIGHTING CONTROL
FLICKER MANAGEMENT




Silhouette

The Silhouette Blade Pendant offers a minimalistic design and flexible light distribution.


The premium diffuser eliminates pixelation and reduces glare.

Silhouette

Blade

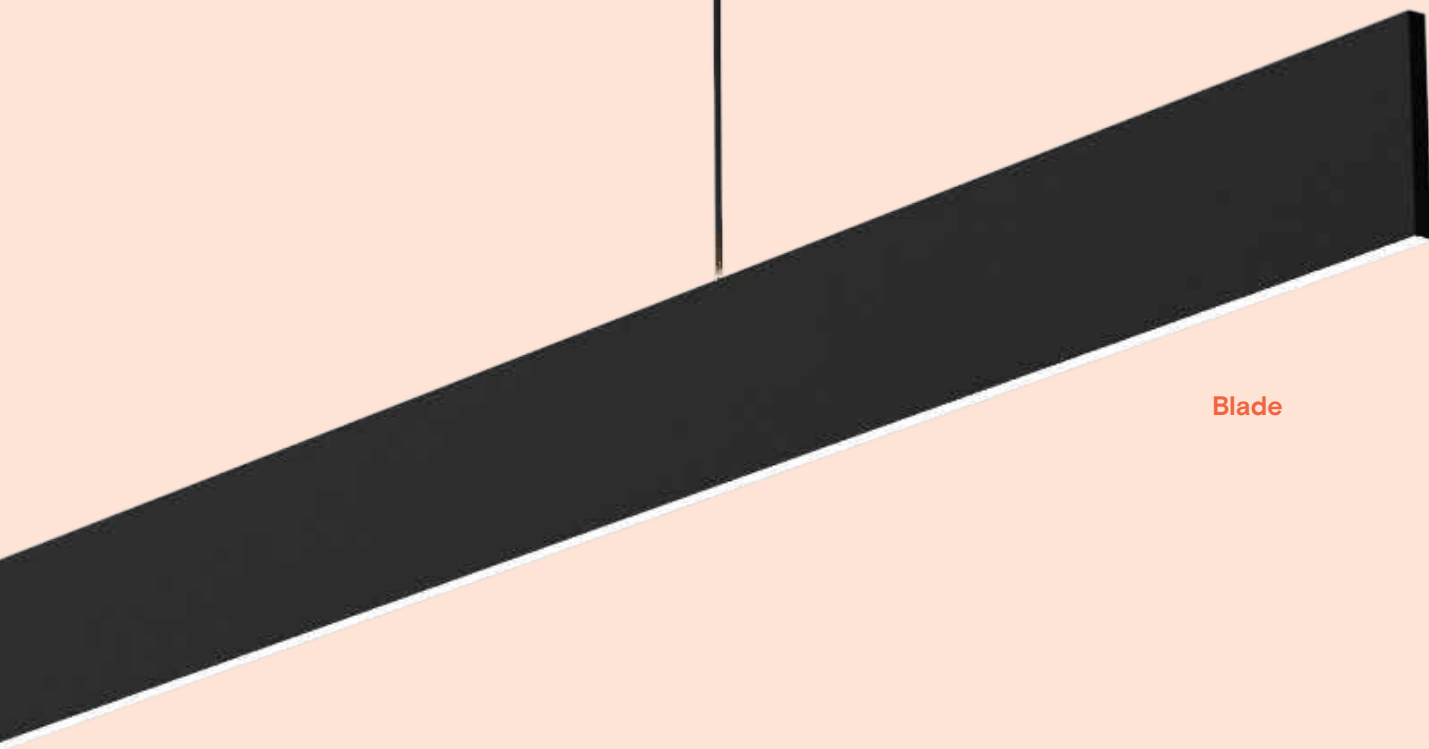

Void

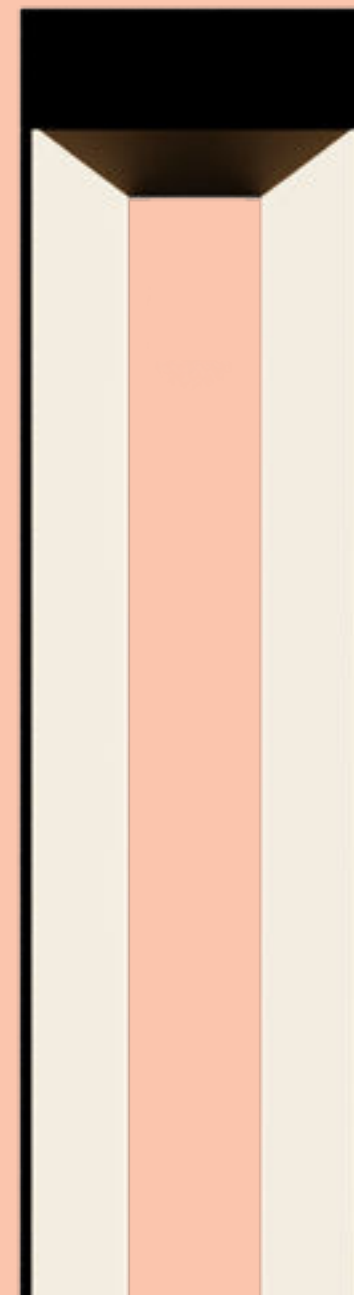

Alcove





Silhouette

Void

SKU	W	Lm @4000K/@80CRI	Dimensions (mm)	
G2-SV20	20	1500	48.8	110
G2-SV40	40	3200	48.8	110
G2-SV60	60	5000	48.8	110



Physical
Housing Aluminium
Trim Finish White, Black
Mounting Type Suspended

Electrical
Voltage ACC 220-240 50/60Hz
Control Non-dimmable

Optical
Beam Angle 120°
CCT 2700, 3000, 4000, 5700K
CRI 80, 90
UGR < 19
Efficiency 75-83lm/W

Certification
Warranty 5 years
Category AS/NZS 60598.2.1
TM21 report on request



IP20



Silhouette

Alcove

SKU	W	Lm @4000K/@80CRI	Dimensions (mm)	
G2-SAR40	40	4000	61	370
G2-SAR60	60	6000	61	370



Physical
Housing Aluminium
Trim Finish White, Black
Mounting Type Suspended

Electrical
Voltage AC 220-240v 50/60Hz
Control Non-dimmable

Optical
Beam Angle 110°/60°
CCT 2700, 3000, 4000, 5700K
CRI 80, 90
UGR < 19
Efficiency 100lm/W

Certification
Warranty 5 years
Category AS/NZS 60598.2.1
TM21 report on request



IP20 IK03

SKU	W	Lm @4000K	Dimensions (mm)	
G2-SB30	30W	1620	650	45
			80	35
G2-SB45	45W	2430	1004	45
			850	35
			1464	8
			500 - 1500	8

CE RoHS



Silhouette

Blade

Physical
Housing Aluminium
Trim Finish White, Black
Mounting Type Suspended


Electrical
Voltage AC 220-240v 50/60Hz
Control Non-dimmable, Triac, 1-10V, DALI

Optical
Beam Angle


100°/100°

CCT 2700, 3000, 4000, 5700K
CRI 90
UGR > 19
Efficiency 54lm/W

Certification
Warranty 5 years
Category AS/NZS 60598.2.1
TM21 report on request



IP20 IK06

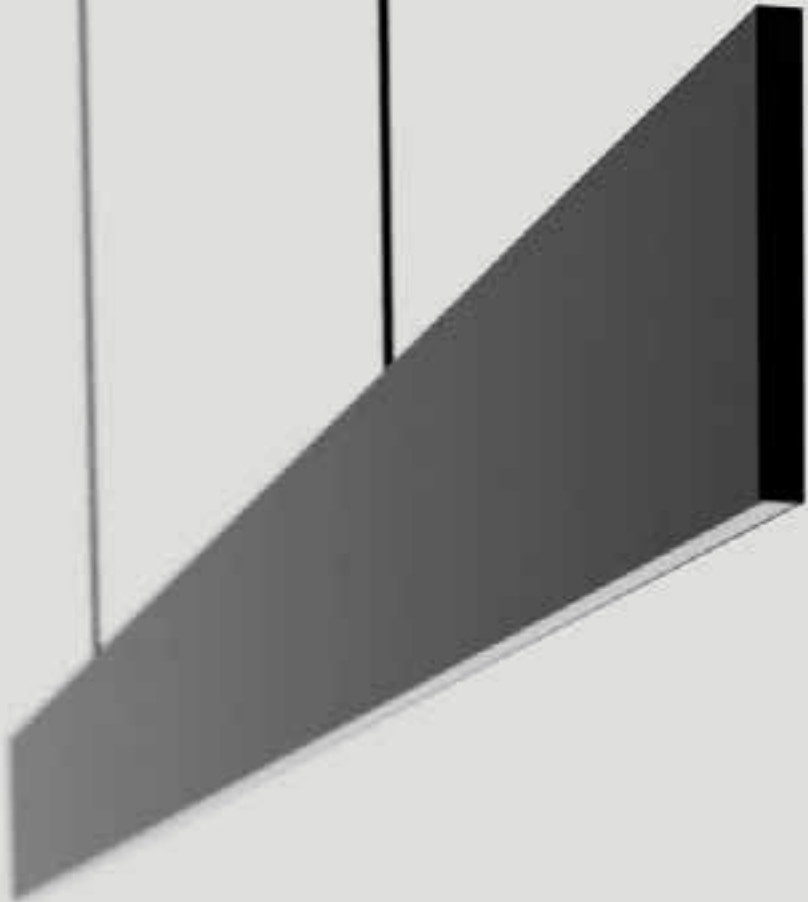

well-being

grace

by NOVII

As a trailblazer in light and immersive technologies, Novii helps you create innovative, effective and award-winning retail, commercial and residential spaces.

We know light. We've carefully developed the Grace range to work for architects, designers and those seeking exceptional lighting solutions that effortlessly integrate into any space.

Start a conversation with us.
0800 663 353