

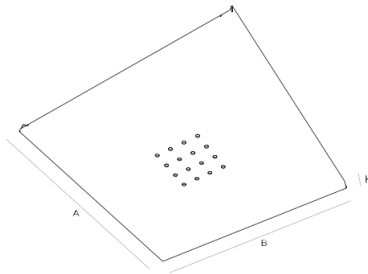


## MATRIX 600 /840

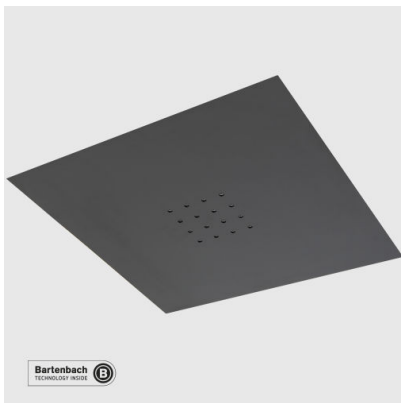

OC ECG **	Socket	A/B/H[mm]	a/b/h[mm]	Weight [kg]	Flux [lm]*	∠	Total power [W]
1519111XY	LED	595/595/30	600/600/30	4.00	3289	40°	47.0



CCT	
4000 K	
CRI	UGR
>80	<16
LED Service life	
50000h L80B10 /SDCM3	

**GENERAL** Recessed luminaire for general illumination. Invisibility of light source and no glare makes it desirable as an architectural element.

**OPTICS** Lens made of PMMA, retracted from the bottom surface of the luminaire, emitting light through perforation on the surface. Retraction from the perforation enables invisibility of the light source, providing full visual comfort.

**LIGHTING MANAGEMENT** The choice of appropriate control gear enables integration into lighting management systems, including dynamic white function.

**HOUSING** Housing is made of steel sheeting. Finish: anodisation in natural aluminium colour or epoxy polyester powder coating. Fine structured texture. Other colours available upon request.

**APPLICATION** Applicable to modular and gypsum ceilings.

**FEATURE** The complex geometry of the lens enables colour mixing into dynamic white function.

**ADDITIONAL** Other light colour temperatures available upon request.



\*\* Replace XY with the color code when ordering ( e.g. 11 white, 21 grey, 31 black).

\*\* Add '-5' on ordering code for DALI control gear or

\*\* Add '-4' on ordering code for 1-10V control gear

\* Luminaire luminous flux and connected electrical load - initial tolerance of  $\pm 10$  % (at ambient temperature of 25°C).