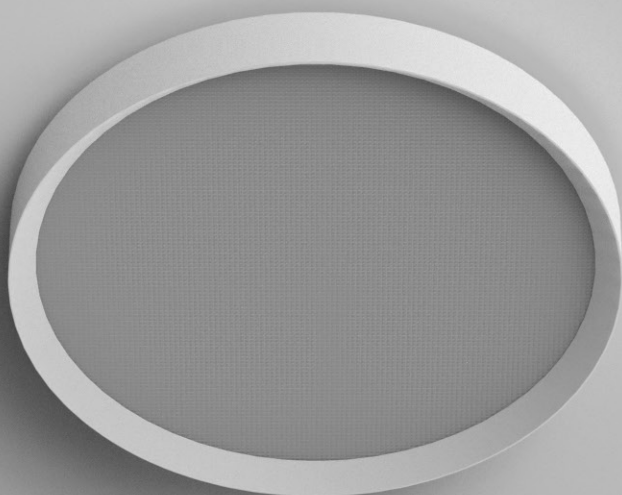


Flow

SKU	W	Lm @4000K/@90CRI	Light Distribution	Dimensions (mm)	
(TW) G2-F435D	40W	4508	Direct	435	115
(TW) G2-F435DI	40W	3777	Direct/Indirect	435	115
(TW) G2-F585D	60W	6768	Direct	585	115
(TW) G2-F585DI	60W	5665	Direct/Indirect	585	115
(TW) G2-F735D	70W	7892	Direct	735	115
(TW) G2-F735DI	70W	6610	Direct/Indirect	735	115
(TW) G2-F875D	90W	10153	Direct	875	115
(TW) G2-F875DI	90W	8498	Direct/Indirect	875	115
(TW) G2-F1150D	120W	13537	Direct	1150	115
(TW) G2-F1150DI	120W	11146	Direct/Indirect	1150	115

Physical

Housing Aluminium

Trim Finish White, Black,
Custom colours on request

Optics Microprismatic

Mounting Type

Surface Mounted, Suspended

Electrical

Voltage

AC 220-240v 50/60Hz

Control

Non-dimmable, Triac
DALI 2, TW (DALI DT8)

Optical

Beam Angle



90°

CCT 2700, 3000, 4000, 5700K
2700-6500K (Tunable White)*

CRI 90

UGR < 19

Efficiency 94lm/W

Certification

Warranty 5 years

Category

AS/NZS 60598.2.1

TM21 report on request



IP20



* Tunable White specifications
available on request

SKU	Accessories
G2-FRSUS	Suspension Kit