


fluxxLED

CR floodlight

CR floodlight

fluxxLED

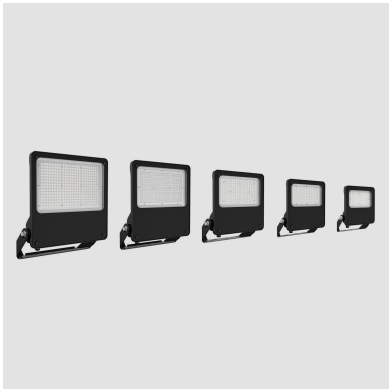

Model shown: F3-CRF

Product Specification

SKU	Wattage	Lumen Output (80CRI / 5000K)	Dimension DxWxH mm
F3-CRF50	50W	7500	292 x 245 x 55
F3-CRF100	100W	15000	353 x 287 x 65
F3-CRF150	150W	22500	392 x 319 x 70
F3-CRF200	200W	30000	447 x 359 x 75
F3-CRF300	300W	45000	495 x 419 x 75

SKU Builder

Brand	Wattage	Colour	CRI
F3-CRF FluxxLED CR Floodlight	XXX 50 = 50W 100 = 100W 150 = 150W 200 = 200W 300 = 300W	X B = Black	X 7 = 70CRI 8 = 80CRI

CCT	Beam Angle	Control	Accessories
X 3 = 3000K 4 = 4000K 5 = 5000K	XXX T1 = TYPE I T3 = TYPE III 25 = 25D 60 = 60D	XX N = Non-Dim 10V = 1-10V	X

Physical

Material
Aluminium with Corrosion
Resistant Powder Coat C5/
Tempered Glass

Finish
Black RAL9017

Mounting Type
Surface Mounted, Bracket, Pole,
Outrigger

Tilt Angle
270°

Electrical

Voltage
AC 220-240, 50/60 Hz

Control
Non-dimmable / 1-10V

Optical

Beam Angle
Type III / Type I / 60° / 25°

CCT
3000K, 4000K, 5000K

CRI
70 / 80

UGR
> 19

Efficiency
150Lm/W

SDCM
3

Certification

Warranty
5 years standard

Category
IP66 / IK08

Lifetime
L80 >92,000 Hrs

Corrosion resistance
C5


AS/NZS 60598.2.5




CR floodlight

fluxxLED


Beam angle options




25 = 25



60 = 60



T1 = Type I



T3 = Type III

Mounting Options



Bracket mount



Pole mount



Outrigger mount



Pole Clamp bracket

Accessories



F3-CRFBM60
Pole Mount Dia 60mm
(100-300W)

ADC12 Aluminium,
Powder coated




F3-CRFBM42
F3-CRFBM76
Pole Mount Dia 42/76mm
(100-300W)

Q235 steel
Cold Galvanised
E-coating + Powder coat




F3-CRFOA
Outrigger arm
(50W)

SPCC steel
50W only



F3-CRFCB1
Clamp Bracket
40-100mm
(50-200W)

SPCC Steel



F3-CRFCB2
Clamp Bracket
40-150mm
(200/300W)

SPCC Steel

CR floodlight

fluxxLED

Product Dimensions

