


VIHOR 32LED T2 1.05A /740



IP66

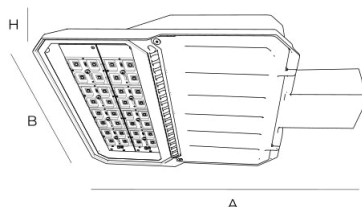

21



220V
240V




31



CLASS 2

50Hz
60Hz

**		A/B/H[mm]	a/b/h[mm]	[kg]	Flux [lm]*	[W]
7012T22XY	LED	445/302/95	-	3.70	13033	108.0



CCT

4000 K

CRI

>70

100000h L90B10/ SDCM 3

GENERAL High-efficiency LED street luminaire.

OPTICS A wide range of PMMA lenses and tempered glass protector (LOR \geq 0.85).

HOUSING High pressure die-cast aluminum with thermal barrier, epoxy (UV and anti-corrosion) protection. Easy serviceability.

ADVANTAGES Autonomous dimming/ flux reduction, CLO function (Constant Light Output), light intensity adjustment, thermal protection, 6 kV, Pf \geq 0.95.

APPLICATION Direct mounting on arm \varnothing 42-60 mm.

FEATURES DALI, R2M, U6Me2, 10 Kv.



** Replace XY with the color code when ordering (e.g. 11 white, 21 grey, 31 black).

** Add '-5' on ordering code for DALI control gear or

** Add '-4' on ordering code for 1-10V control gear

* Luminaire luminous flux and connected electrical load - initial tolerance of ± 10 % (at ambient temperature of 25°C).