

## Beam Me Up (Wallwasher) A4 | Surface



**DE** LED-Anbauleuchte für Deckenmontage mit rückversetzter Optik und dekorativem Reflekterring. Rein direkt- und breitflächig asymmetrisch abstrahlend. Leuchtenschirm aus hochwertig verarbeitetem Fiberglas. Gehäuse-Außenfläche und dekorativer Reflekterring in unterschiedlichen Lackierungen und Kombinationen erhältlich, z.B. weiß, silber, graphit, schwarz, gold oder kupferfarben lackiert. Zu Oberflächenoptionen- und Kombinationen siehe Lightnet-Surface-Collection oder Bi-Colour-Auswahl. Microprismenoptik mit optimierter Blendungsbegrenzung speziell für Office-Anwendungen. Satinierter Opaldiffusor für Allgemeinbeleuchtung mit max. Transmissionsgrad und homogener Lichtpunktauflösung. Konverter in Leuchtgehäuse integriert, wahlweise einfach schaltbar oder stufenlos dimmbar (DALI, Touch-Dim, Casambi). Farbtemperaturen 2200K, 2700K, 3000K, 3500K, 4000K, 6500K oder Tunable White. Binning initial  $\leq$  MacAdam 3. Farbwiedergabe  $\text{CRI} > 80$ ,  $\text{CRI} > 90$  oder Full Spectrum.


**EN** LED surface-mounted luminaire for ceilings with rebated diffuser set in a decorative ring. Direct only light distribution with wide asymmetrical beam angle. Luminaire shade made of high-quality processed fiberglass. Outer housing and Decorative reflector ring available in various finishes and combinations, e.g. white, silver, graphite, black, gold or copper coated. For further surface options see Lightnet-Surface-Collection or RAL of your choice. Microprismatic screen with optimized glare reduction especially for workplaces. Satin opal diffuser for general lighting with maximum transmittance and homogeneous lighting. Driver integrated into luminaire housing, optionally switchable or dimmable (DALI, Touch-Dim, Casambi). Colour temperature 2200K, 2700K, 3000K, 3500K, 4000K, 6500K or Tunable White. Binning  $\leq$  MacAdam 3. Colour rendering  $\text{CRI} > 80$ ,  $\text{CRI} > 90$  or Full Spectrum.

**M A4 O A L-8 30 M-D700-G**


Product Family	<b>M:</b> Beam Me Up
Type	<b>A4:</b> Direct only
Optical System	<b>A:</b> Microprismatic, <b>O:</b> Opal Diffuser
Surface Finish	<b>W:</b> Snow White, <b>V:</b> Ivory White, <b>A:</b> Satin Silver, <b>U:</b> Urban Graphite, <b>B:</b> Jet Black, <b>H:</b> Anodic Champagne, <b>K:</b> Satin Copper
Control Gear	<b>E:</b> On/Off, <b>L:</b> DALI, <b>H:</b> Touch-Dim, <b>C:</b> Casambi, <b>6:</b> DALI DT6 for TW, <b>8:</b> DALI DT8 for TW
Colour Rendering	<b>8:</b> CRI>80, <b>9:</b> CRI>90, <b>F:</b> Full Spectrum [except 2200K]
Colour Temperature	<b>22:</b> 2200K, <b>27:</b> 2700K, <b>30:</b> 3000K, <b>35:</b> 3500K, <b>40:</b> 4000K, <b>65:</b> 6500K, <b>TW:</b> Tunable White 2700-6500K
Power	<b>M:</b> Medium Power, <b>H:</b> High Power
Size	Luminaire Diameter in mm: <b>D700, D1200</b>
Reflector	<b>W:</b> Snow White, <b>V:</b> Ivory White, <b>A:</b> Satin Silver, <b>U:</b> Urban Graphite, <b>B:</b> Jet Black, <b>H:</b> Anodic Champagne, <b>K:</b> Satin Copper, <b>G:</b> Satin Gold
On Request	Radar Sensor, Emergency Module



Microprismatic | Direct




Opal Diffuser | Direct



D mm	Lumen/Watt		D mm	Lumen/Watt	
	Medium Power	High Power		Medium Power	High Power
700	3060lm/35W	4490lm/52W	700	3160lm/35W	4650lm/52W
1200	8980lm/104W	11750lm/139W	1200	9300lm/104W	12160lm/139W

Lumen Values: Luminaire luminous flux at 4000K/CRI>80. Other configurations on request.

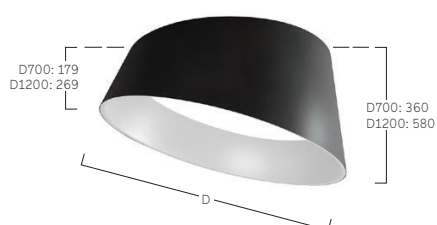

**H** Anodic Champagne  
**H** Anodic Champagne



**U** Urban Graphite  
**U** Urban Graphite



**K** Satin Copper  
**K** Satin Copper



**H** Anodic Champagne  
**B** Jet Black



**B** Jet Black  
**G** Satin Gold



**B** Jet Black  
**W** Snow White