

# UDON 20



F3-U20

## Physical

**Material** Silicone  
with Silicone Clear diffuser

**Mounting type**  
Surface mounted

**Power Feeds**  
Multiple types depending on application

## Electrical

**Voltage and Current**  
24VDC

**Control** Non-dimmable,  
Triac, DALI

**Max Run Per Power Feed**  
**Mono colour**  
5m single power feed  
10m dual power feed

## Optical

**Beam angle**  
15°, 20°, 25°  
38°, 60°, 20x40°

**CCT**  
2700, 3000, 4000,  
5000, Red, Green,  
Blue,



**CRI** 80, 90 (on request)

## Certification


**Warranty** 5 years

**Category** IP68 From Factory


## Features



## Product Specification

SKU	Wattage (per m)	Lumen Output (per m) (3000K)	Cuttable	Minimum Bend Diameter	Dimensions WxH mm	Technical Drawing
F3-U20	18 W	772 lm	250 mm	250 mm	18 x 18	

## Beam angles

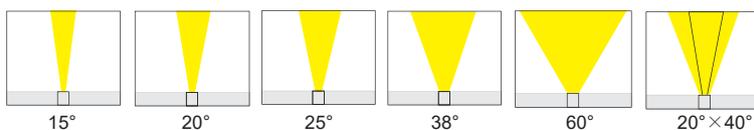


## SKU builder


Brand	Colour	CRI	CCT	Beam Angle
<b>F3-U20</b> - FluxxLED 3 Udon 20	<b>W</b> W = White	<b>X</b> 8 = 80CRI 9 = 90CRI	<b>XX</b> 27 = 2700K 3 = 3000K 4 = 4000K 5 = 5000K R = Red G = Green B = Blue	<b>XXXXX</b> 15 = 15° 20 = 20° 25 = 25° 38 = 38° 60 = 60° 20X40 = 20 x 40°

Example: F3-U20-W8320X40

## Accessories



**U20 Aluminium Mounting Channel**  
**(2m length)**  
 SKU: F3-U20A1



**U20 Aluminium Flexible Mounting Channel (2m length)**  
 SKU: F3-U20A2



**U20 IP68 Moulded Bottom**  
**(600mm with End Cap)**  
 SKU: F3-U20A3