

fluxxLED

base canopy

base canopy

fluxxLED



Model Shown: F3-BC75-WXX120XX



Model Shown: F3-BC75-WXX90XX

Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Efficiency	Dimension DxH mm
F3-BC75	75W	11625lm	155lm/W	65 x 369 x 368
F3-BC100	100W	15500lm	155lm/W	65 x 369 x 368
F3-BC120	120W	18600lm	155lm/W	65 x 369 x 368

SKU Builder

Brand	Wattage	Colour	CRI	CCT
F3-BC	XXX	W	X	X
FluxxLED Base Canopy	75 = 75W 100 = 100W 150 = 150W	W = White	7 = 70CRI 8 = 80CRI	3 = 3000K 4 = 4000K 5 = 5000K
Beam Angle	Control			
XXX	X			
90 = 90°	N = Non-dim			
120 = 120°	DA = DALI 2			

Physical

Housing
Aluminium with Corrosion
Resistant Powder Coat/
Tempered Glass

Optics
120D Glass/90D Reflector

Finish
White RAL9016

Mounting Type
Surface Mounted
Conduit Mounted

Electrical

Voltage
AC 220-240 / 50/60 Hz

Control
Non-dimmable / DALI

Optical

Beam Angle
90° / 120°

CCT
3000K, 4000K, 5000K

CRI
70 / 80

UGR
>19

Efficiency
155Lm/W

SDCM: 3

Certification

Warranty
10 years

Category
IP66 / IK08

Lifetime
L80 >60,000 Hrs

AS/NZS 60598.2.1
AS/NZS 60598.1




base canopy

fluxxLED


Beam angle options

Lumen ouputs @ 4000K, 80CRI



90 = 90°


75W = 11075 Lm
100W = 14768 Lm
120W = 17672 Lm



120= 120°


75W = 11652 Lm
100W = 15521 Lm
120W = 18668Lm

Accessories

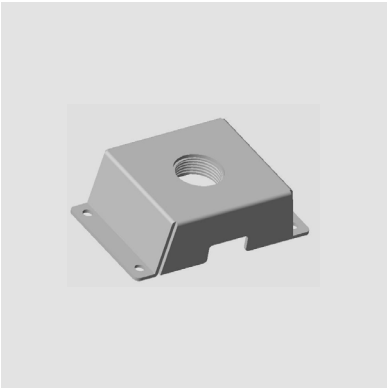

3/4 Conduit Mount

SKU: F3-BCA2

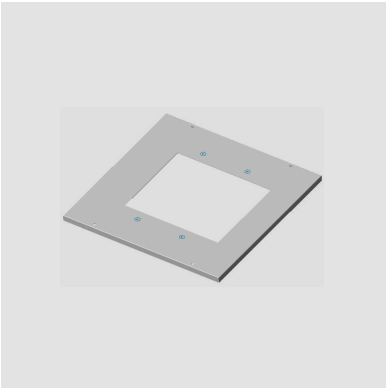

Surface Mount Adapter

SKU: F3-BCA1

Product Dimensions

