

fluxxLED

surface wall pack

surface wall pack

fluxxLED



Model shown: F3-SW40/70



Model shown: F3-SW30/20/10

Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Efficiency	Dimension DxWxH mm
F3-SW10	10W	1360lm	136lm/W	196 x 96 x 186
F3-SW20	20W	2720lm	136lm/W	196 x 96 x 186
F3-SW30	30W	4081lm	136lm/W	196 x 96 x 186
F3-SW40	40W	5442lm	136lm/W	282 x 125 x 205
F3-SW70	70W	9524lm	136lm/W	282 x 125 x 205

SKU Builder

Brand	Wattage	Colour	CRI
F3-SW FluxxLED Surface Wall	XX 10 = 10W 20 = 20W 30 = 30W 40 = 40W 70 = 70W	X B = Black G = Grey	X 7 = 70CRI 8 = 80CRI 9 = 90CRI
CCT	Beam Angle	Control	Accessories
X 3 = 3000K 4 = 4000K 5 = 5000K	FAS FAS = Flood Asymmetric	XX N = Non-dim DA = DALI2	X P = Photocell

Example: F3-SW30-B84FASDA-P

Physical

Material
Aluminium Corrosion Resistant
Powder Coat

Optics
Polycarbonate Lens

Finish
Black RAL9017
Grey RAL9006

Mounting Type
Surface mounted

Electrical

Voltage
AC 220-240, 50/60 Hz

Control
Non-dimmable / 1-10V / DALI /
Photocell

Optical

Beam Angle
Asymmetric

CCT
3000K, 4000K, 5000K

CRI
70 / 80

UGR
>19

Efficiency
136Lm/W

SDCM
3

ULOR
0%

Certification

Warranty
5 years standard
8 years extended

Category
IP66 / IK08

Lifetime
L80 >82,000 Hrs

AS/NZS60598.2.1
AS/NZS 60598.1

Salt Spray
3000 Hrs testing

CE RoHS


IP66 IK08

surface wall pack

fluxxLED

Beam angle options

Lumen outputs @ 4000K, 80CRI

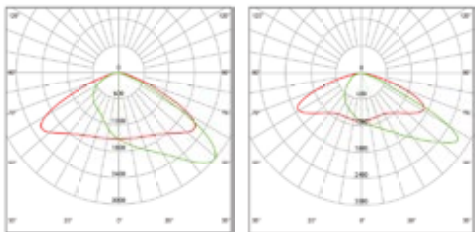


FAS = Asymmetric

FAS = Asymmetric

10W = 1360 Lm
20W = 2720 Lm
30W = 4081 Lm

40W = 5442 Lm
70W = 9524 Lm

Product Dimensions

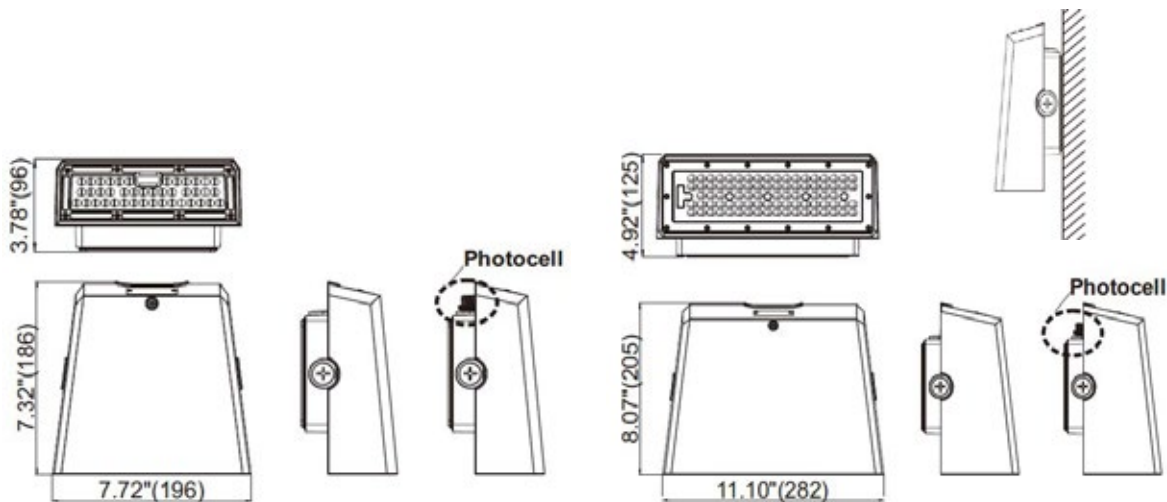

F3-SW10
F3-SW20
F3-SW30

F3-SW40
F3-SW70