



VIHOR 16 T2 1.05A /740

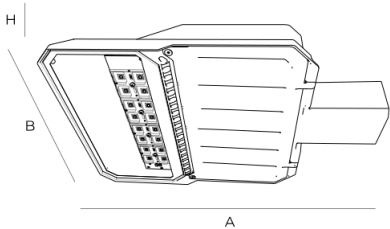

**		A/B/H[mm]	a/b/h[mm]	[kg]	Flux [lm]*	[W]
7011T22XY	LED	445/302/95	-	3.20	6517	54.0



CCT

4000 K

CRI

>70

100000h L90B10/ SDCM 3

- GENERAL** High-efficiency LED street luminaire.
- OPTICS** A wide range of PMMA lenses and tempered glass protector (LOR≥ 0.85).
- HOUSING** High pressure die-cast aluminum with thermal barrier, epoxy (UV and anti-corrosion) protection. Easy serviceability.
- ADVANTAGES** Autonomous dimming/ flux reduction, CLO function (Constant Light Output), light intensity adjustment, thermal protection, 6 kV, Pf≥0.95.
- APPLICATION** Direct mounting on arm ø 42-60 mm.
- FEATURES** DALI, R2M, U6Me2, 10 Kv.



** Replace XY with the color code when ordering (e.g. 11 white, 21 grey, 31 black).

** Add '-5' on ordering code for DALI control gear or

** Add '-4' on ordering code for 1-10V control gear

* Luminaire luminous flux and connected electrical load - initial tolerance of ±10 % (at ambient temperature of 25°C).