


# DISCOVERY POWER LED




## General data:

Mounting:	on an adjustable holder, to the ground
Casing:	aluminium
Ingress protection IP:	66
Operating temperature range:	from -40° to +45°
Żywotność L80B10:	100 000h



## Dane elektryczne:

Nominal voltage:	220-240V AC
Nominal frequency:	50-60Hz
luminaire nominal power:	5W-50W
Protection class:	I
Connection:	wire 3x0,75mm <sup>2</sup> (5x0,75mm <sup>2</sup> for DALI)
Wiring:	through, standard
Connection wire:	0,5m
Dimming:	ON-OFF, DALI
Power supply:	inside the luminaire

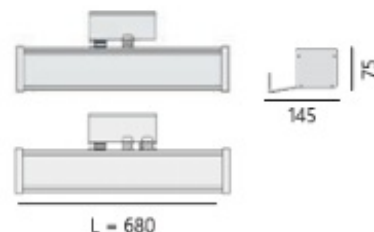

## Optical data:

Optical system:	lens
Material:	PMMA
Light emission:	direct
Light distribution:	symmetrical, asymmetrical


## Dane świetlne:

Light source:	LED
Colour rendering index:	CRI>80
Colour tolerance SDCM:	SDCM<3
Tolerance of luminous flux:	+/-10%

Discovery is a linear luminaire with a slim construction based on an aluminum profile, using high-quality LED modules. Thanks to a wide range of optics, the luminaire is able to meet the assumptions of the most demanding projects. The use of an appropriate lighting control system allows you to obtain unique light scenes. The Discovery luminaire is designed to illuminate the facades of modern, classic, historical buildings, urban buildings, housing estates, hotels, restaurants.

## L - lenses available:

10 - 10°  
20 - 20°  
40 - 40°  
60 - 60°  
41 - 45°x10  
8 - 8° wall-wash  
45 - 45° wall-wash  
02 - asymmetrical

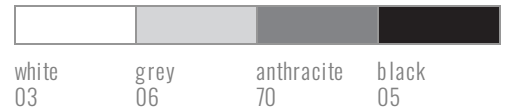

## W - wiring

T- through  
S- standard

## E - electronic

O- On-Off  
D- DALI

## C -colour

Catalogue code	Luminaire light flux	Power	Effectiveness	Color temperature	CRI/RA	Weight	Box dimensions
9162.02ELCW	214 lm	17 W	126 lm/W	2700K	≥80	2,4 kg	750x200x150 mm
9162.03ELCW	2230 lm	17 W	126 lm/W	3000K	≥80	2,4 kg	750x200x150 mm
9162.04ELCW	2323 lm	17 W	126 lm/W	4000K	≥80	2,4 kg	750x200x150 mm
9163.02ELCW	3212 lm	25 W	128 lm/W	2700K	≥80	2,4 kg	750x200x150 mm
9163.03ELCW	3346 lm	25 W	128 lm/W	3000K	≥80	2,4 kg	750x200x150 mm
9163.04ELCW	3485 lm	25 W	128 lm/W	4000K	≥80	2,4 kg	750x200x150 mm

## Accessories

connector IP 68 3-pole

catalogue number 124.00



Raster

On request

