


DWELL 50 LV




General data:

Mounting type:	in-ground
Luminaire body:	aluminum/inox
operating temperature range:	from -40° to +45°
Ingress protection:	67
Lifetime L80B10:	100 000h
impact protection IK:	10



Electrical data:

Nominal voltage:	350mA, max. 3V DC
luminaire nominal power:	1W
Protection class:	III
Connection wire:	wire 2x1mm ²
Wiring:	standard
dimming/power supply see wiring diagrams:	ON-OFF, DALI, DMX, CASAMBI

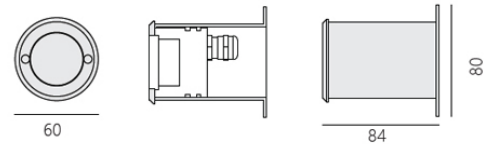

Optical data:

Optical system:	lens
Material:	PMMA
Light emission:	direct
Light distribution:	asymmetrical

Lighting data:


Light source:	LED
Colour rendering index:	CRI>80
colour tolerance SDCM:	SDCM<3
Tolerance of luminous flux:	+/-10%

Other data:

On request:	CRI>90, :6500K, amber, red, blue, green
-------------	---

Dwell is a luminaire mounted in the wall for lighting driveways, walls, stairs. Ingress protection IP67 makes the luminaire perfectly withstand weather conditions. Luminaire body made of aluminum, outer ring made of stainless steel. Tempered glass 8mm.

Photometric body

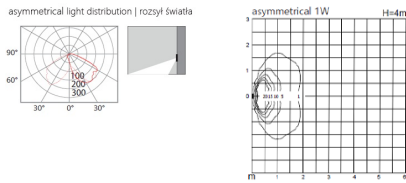

C- colour



white 03 grey 06 antracyt 70 black 05 inox 08

L- beam angle 02- asymmetrical

Catalogue code	Luminaire light flux	Power	Color temperature	CRI/RA	Weight	Box dimensions
9179.020LC	65lm	1W	2700K	≥80	0,4 kg	200x200x200mm
9179.030LC	68lm	1W	3000K	≥80	0,4 kg	200x200x200mm
9179.040LC	71lm	1W	4000K	≥80	0,4 kg	200x200x200mm

Accessories

connector IP68 3-pole

catalogue number 124.00



embranchment IP67

catalogue number 90.10



honeycomb (anti-glare)

