

# GLIMER



## General data:

Luminaire body: aluminum  
Mounting: track 230V  
Ingress protection IP: IP20  
Operating temperature: from -40°C to +40°C  
Lifetime L80B10: 100 000h

## Electric data:


Nominal voltage: 220-240V AC  
Nominal frequency: 50-60 Hz  
Protection class: III  
Contains light source: Tak  
Dimming: on-off, DALI (on request: CASAMBI)

## Optical data:

Optical system: wallwasher  
Material: PMMA  
Light source: LED

## Lighting data:

Light source: LED  
Colour rendering index: CRI>90 (on request: CRI>95)  
Tolerance of luminous flux: +/-10%

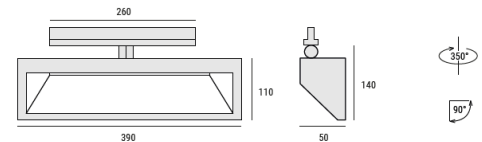

**E-electronics**

O- on-off

D- Dali



cold white    black  
03                05

**C- colour**

Catalogue code	Light flux	Power	Effectiveness	Color temperature	CRI/RA	Weight	Dimensions	Box dimensions
2048.02EC	877lm	10W	88lm/W	2700K	≥90	1,6kg	390x110x140mm	400x130x160mm
2048.03EC	914lm	10W	91lm/W	3000K	≥90	1,6kg	400x130x160mm	180x180x100mm
2048.04EC	952lm	10W	95lm/W	4000K	≥90	1,6kg	400x130x160mm	180x180x100mm