

PIKE WALLWASHER



General data:

| | |
|------------------------------|---------------------|
| Luminaire body: | aluminum |
| Mounting type: | track 230V |
| Ingress protection: | IP20 |
| operating temperature range: | from -40°C to +40°C |
| Lifetime L80B10: | 100 000h |

Electrical data:


| | |
|------------------------|------------------------------------|
| Nominal voltage: | 220-240V AC |
| Nominal frequency: | 50-60 Hz |
| Protection class: | I |
| Contains light source: | yes |
| Dimming: | on-off, DALI (on request: CASAMBI) |

Optical data:

| | |
|---------------------|------------|
| Optical system: | reflector |
| Light distribution: | wallwasher |

Lighting data:


| | |
|-----------------------------|-----------------------------|
| Light source: | LED |
| Colour rendering index: | CRi>90 (on request: CRi>95) |
| Tolerance of luminous flux: | +/-10% |

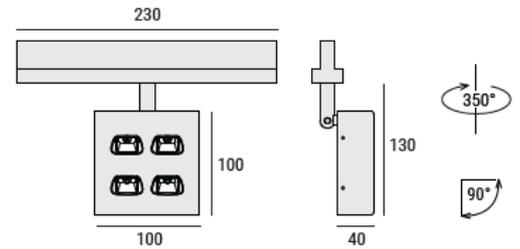

E-electronics

O- on-off

D- Dali



C- colour

| Catalogue code | Luminaire light flux | Power | Effectiveness | Color temperature | CRI/RA | Weight | Dimensions | Box dimensions |
|----------------|----------------------|-------|---------------|-------------------|--------|--------|--------------|----------------|
| 2051.02EC | 1130lm | 13W | 87lm/W | 2700K | ≥90 | 0,5kg | 100x40x130mm | 300x200x120mm |
| 2051.03EC | 1178lm | 13W | 91lm/W | 3000K | ≥90 | 0,5kg | 100x40x130mm | 300x200x120mm |
| 2051.04EC | 1227lm | 13W | 94lm/W | 4000K | ≥90 | 0,5kg | 100x40x130mm | 300x200x120mm |