

WES 1X4IR



General data:

| | |
|------------------------------|-------------------|
| Mounting type: | to the wall |
| Luminaire body: | aluminum |
| Ingress protection: | IP66 |
| operating temperature range: | from -40° to +45° |
| Lifetime L80B10: | 100 000h |
| Impact protection: | IK10 |

Electrical data:


| | |
|--------------------------|-----------------------------------|
| nominal voltage: | 220-240V AC |
| Nominal frequency: | 50-60Hz |
| luminaire nominal power: | 17W, 26W |
| Protection class: | I |
| connection: | wire 3x0,75mm (5x0,75mm for DALI) |
| Wiring: | through, standard |
| Dimming: | ON-OFF, DALI |

Optical data:

| | |
|------------------------|---------------------------|
| Optical system: | lens |
| Material: | PMMA |
| Contains light source: | yes |
| Lighting : | direct |
| Light distribution: | symmetrical, asymmetrical |

Lighting data:

| | |
|-----------------------------|-----------------------------|
| Type of source: | LED |
| Colour rendering index: | CRI>80 (on request: CRI>90) |
| Colour tolerance: | SDCM<3 |
| Tolerance of luminous flux: | +/-10% |

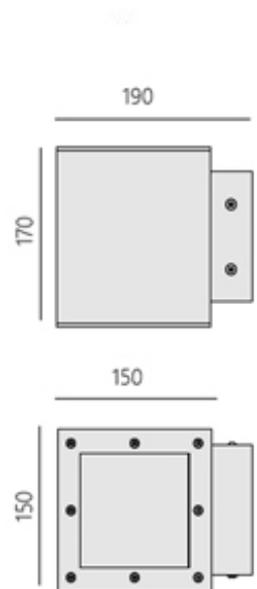

Wes is an outdoor wall lamp that glows down or up-down. Ideal for illuminating building facades. A wide range of optics allows you to adjust the angle of incidence of the light flux to the needs of the user. Thanks to the Ingress protection IP66, the luminaire is resistant to external factors. Wes is a family of luminaires with different powers, dimensions, different types of assembly and application, while maintaining a uniform design.

E-electronics

O- on-off

D- Dali

C- colour

L – lenses

5 – 5°

W- wiring

T- through

S- standard



white
03

grey
06

anthracite
70

black
05

| Catalogue code | Luminaire light flux | Power | Effectiveness | Color temperature | CRI/RA | Weight | Dimensions | Box dimensions |
|----------------|----------------------|-------|---------------|-------------------|--------|--------|-----------------------|----------------|
| 9120.02ELCW | 579lm | 5W | 125lm/W | 2700K | ≥80 | 3,4 kg | L=166, W=150, H=190mm | 300x380x200mm |
| 9120.03ELCW | 602lm | 5W | 125lm/W | 3000K | ≥80 | 3,4 kg | L=166, W=150, H=190mm | 300x380x200mm |
| 9120.04ELCW | 627lm | 5W | 125lm/W | 4000K | ≥80 | 3,4 kg | L=166, W=150, H=190mm | 300x380x200mm |
| 9121.02ELCW | 1155lm | 9W | 139lm/W | 2700K | ≥80 | 3,4 kg | L=166, W=150, H=190mm | 300x380x200mm |
| 9121.03ELCW | 1204lm | 9W | 139lm/W | 3000K | ≥80 | 3,4 kg | L=166, W=150, H=190mm | 300x380x200mm |
| 9121.04ELCW | 1254lm | 9W | 139lm/W | 4000K | ≥80 | 3,4 kg | L=166, W=150, H=190mm | 300x380x200mm |

Accessories

connector IP68 3-pole

catalogue code 124.00

