


WES



General data:


Mounting type:	surface
Casing:	aluminum
Ingress protection:	IP66
Operating temperature range:	from -40° to +40°
Lifetime L80B10:	100 000h
Impact protection:	IK10

Electrical data:

Nominal voltage:	220-240V AC
Częstotliwość znamionowa:	50-60Hz
luminaire nominal power:	9W, 17W
Protection class:	I
Wiring:	wire 3x0,75mm (5x0,75mm for DALI)
Wiring:	through, standard
Dimming:	on-off, Dali

Optical data:

Optical system:	lens
Material:	PMMA
Light emission:	direct
Light distribution:	symmetrical, asymmetrical
Contains light source:	yes

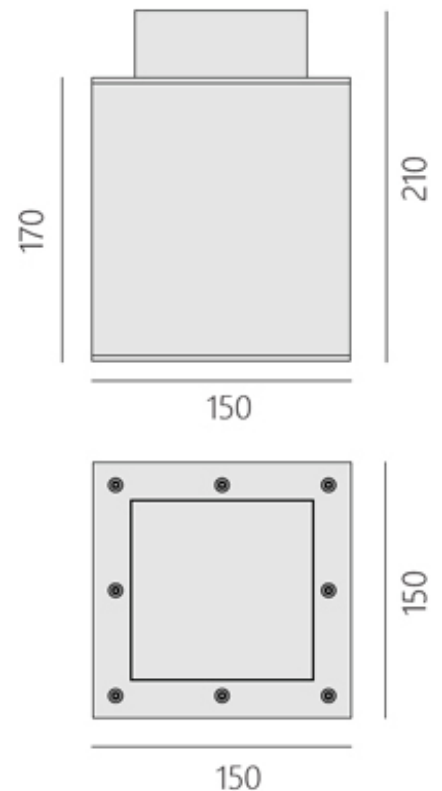

Wes outdoor luminaire mounted directly to the ceiling. It allows you to illuminate external communication routes or building facades. The optics installed in the luminaire allow you to adjust the angle of incidence of light (from narrow to wide) according to the user's needs. Wes is a family of luminaires with different powers, dimensions, different types of assembly and application, while maintaining a uniform design.

E-electronics

O- on-off
D- Dali


C- colour

L – beam angle

10 – 10°
20 – 20°
30 – 30°
40 – 40°
60 – 60°
41 – 45x10°
8- 8° wall-washing
45- 45° wall-washing
02- asymmetrical
03- street light

W- wiring

T- through
S- standard



Catalogue code	Luminaire light flux	Power	Effectiveness	Color temperature	CRI/RA	Weight	Dimensions	Box dimensions
9126.04 ELCW	1165lm	9W	129lm/W	4 000K	≥ 80	3,6kg	L=150mm W=150mm H=206mm	300x380x200mm
9127.04 ELCW	2331lm	17W	137lm/W	4 000K	≥ 80	3,6kg	L=150mm W=150mm H=206mm	300x380x200mm
9126.03 ELCW	1119lm	9W	129lm/W	3000K	≥ 80	3,6kg	L=150, W=150, H=206mm	300x380x200mm
9127.03 ELCW	2148lm	17W	137lm/W	3000K	≥ 80	3,6kg	L=150, W=150, H=206mm	300x380x200mm
9126.02 ELCW	1064lm	9W	129lm/W	2700K	≥ 80	3,6kg	L=150, W=150, H=206mm	300x380x200mm
9127.02 ELCW	2148lm	17W	137lm/W	2700K	≥ 80	3,6kg	L=150, W=150, H=206mm	300x380x200mm

Accessories

connector IP68 3-pole

catalogue code 124.00

