


# WES 2X8LED



## General data:

Mounting type:	to the wall
Luminaire body:	aluminum
Ingress protection:	IP66
operating temperature range:	from -40° to +45°
Lifetime L80B10:	100 000h
Impact protection:	IK10

## Electrical data:


Nominal voltage:	220-240V AC
Nominal frequency:	50-60Hz
luminaire nominal power:	17W, 26W
Protection class:	I
connection:	wire 3x0,75mm (5x0,75mm for DALI)
Wiring:	through, standard
Dimming:	ON-OFF, DALI

## Optical data:

Optical system:	lens
Material:	PMMA
Contains light source:	yes
Lighting:	direct
Light distribution:	symmetrical, asymmetrical

## Lighting data:

Type of source:	LED
Colour rendering index:	CRI>80 (on request: CRI>90)
Colour tolerance:	SDCM<3
tolerance of luminous flux:	+/-10%

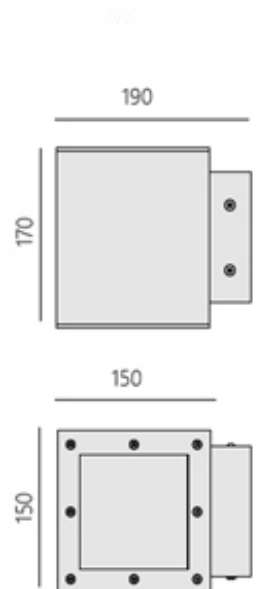

Wes is an outdoor wall lamp that glows down or up-down. Ideal for illuminating building facades. A wide range of optics allows you to adjust the angle of incidence of the light flux to the needs of the user. Thanks to the Ingress protection IP66, the luminaire is resistant to external factors. Wes is a family of luminaires with different powers, dimensions, different of assembly and application, while maintaining a uniform design.

**E-electronics**

O- on-off

D- Dali



white  
03

grey  
06

anthracite  
70

black  
05

**C- colour**

**L – lenses**

10 – 10°

20 – 20°

30 – 30°

40 – 40°

60 – 60°

41 – 45x10°

8 - 8° wall-washing

45 - 45° wall-washing

02- asymmetrical

**W- wiring**

T- through

S- standard

Catalogue code	Luminaire light flux	Power	Effectiveness	Color temperature	CRI/RA	Weight	Dimensions	Box dimensions
9122.02ELCW	2148lm	17W	137lm/W	2700K	≥80	3,8kg	L=170, W=150, H=190mm	300x380x200mm
9122.03ELCW	2237lm	17W	137lm/W	3000K	≥80	3,8kg	L=170, W=150, H=190mm	300x380x200mm
9122.04ELCW	2331lm	17W	137lm/W	4000K	≥80	3,8kg	L=170, W=150, H=190mm	300x380x200mm
9123.02ELCW	3377lm	26W	141lm/W	4000K	≥80	3,8kg	L=170, W=150, H=190mm	300x380x200mm
9123.03ELCW	3517lm	26W	137lm/W	3000K	≥80	3,8kg	L=170, W=150, H=190mm	300x380x200mm
9123.04ELCW	3664lm	26W	141lm/W	4000K	≥80	3,8kg	L=170, W=150, H=190mm	300x380x200mm

## Accessories

connector IP68 3-pole

catalogue code 124.00

