


WES 2X4IR



General data:

Mounting type:	wall mounted
Luminaire body:	aluminum
Ingress protection:	IP66
operating temperature range:	from -40° to +40°
Lifetime L80B10:	100 000h
Ingress protection:	IK10

Electrical data:


Nominal voltage:	220-240V AC
Nominal frequency:	50-60Hz
luminaire nominal power:	10W
Protection class:	I
connection:	wire 3x0,75mm (5x0,75mm for DALI)
Wiring:	through, standard
Dimming:	On-off, DALI

Optical data:

Optical system:	lens
Material:	PMMA
Contains light source:	yes
Light emission:	direct
Light distribution:	symmetrical, asymmetrical

Lighting data:

Light source:	LED
Colour rendering index:	CRI>80
colour tolerance SDCM:	SDCM<3
tolerance of luminous flux:	+/-10%

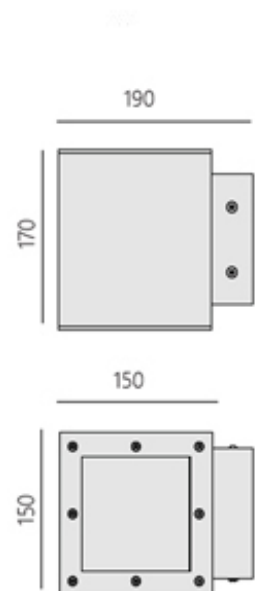

Wes is an outdoor wall lamp that glows down or up-down. Ideal for illuminating building facades. A wide range of optics allows you to adjust the angle of incidence of the light flux to the needs of the user. Thanks to the Ingress protection IP66, the luminaire is resistant to external factors. Wes is a family of luminaires with different powers, dimensions, different types of assembly and application, while maintaining a uniform design.

E- electronics

O- on-off

D- Dali

C- colour

L – optics

5 – 5°

W- wiring

T- through

S- standard



white
03

grey
06

anthracite
70

black
05

Catalogue code	Luminaire light flux	Power	Effectiveness	Color temperature	CRI/RA	Weight	Dimensions	Box dimensions
9124.02ELCW	1155lm	10W	139lm/W	2700K	≥80	3,6kg	L=166, W=150, H=190mm	300x380x200mm
9124.03ELCW	1204lm	10W	139lm/W	3000K	≥80	3,6kg	L=166, W=150, H=190mm	300x380x200mm
9124.04ELCW	1254lm	10W	139lm/W	4000K	≥80	3,6kg	L=166, W=150, H=190mm	300x380x200mm

Accessories

connector IP68 3-pole

catalogue code 124.00

