



**MAGNETICS DALI**

**708-00301302406d**

MAGNETICS GRID EINSATZ SYSTEM LIGHT INSERT WITH 24V ADAPTER made of synthetic, chrome, linear optics beam asymmetric, light output direct, without converter, dimmability: DALI, IP20

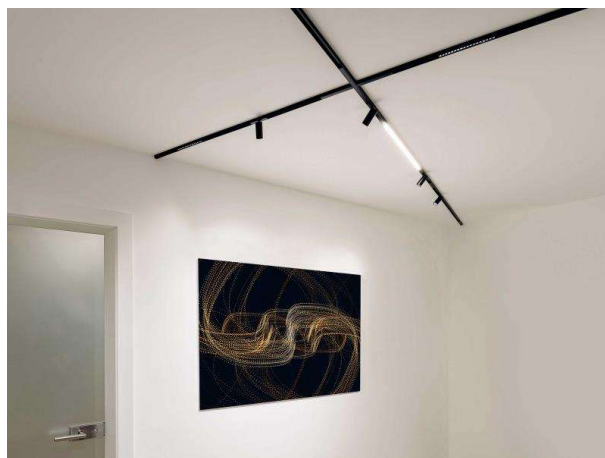


**DRAWING**

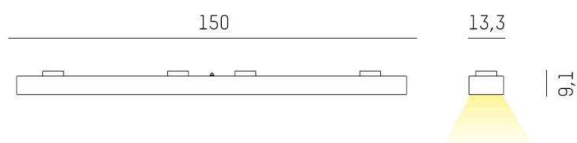

**TECHNICAL DETAILS**

|                       |                            |
|-----------------------|----------------------------|
| System perform. [W]   | 4                          |
| Bulb type             | LED                        |
| Luminous flux [lm]    | 230                        |
| Colour temp. [K]      | 4000K                      |
| CRI                   | >90                        |
| Optics                | high quality linear optics |
| Designer              | INHOUSE                    |
| Converter             | without converter          |
| Light output          | direct                     |
| Beam angle [°]        | asymmetrisch               |
| Voltage [V]           | 24 VDC                     |
| Material              | synthetic                  |
| Length [mm]           | 13,3                       |
| Width [mm]            | 13,7                       |
| Height [mm]           | 8,8                        |
| IP protection class   | IP20                       |
| Voltage class         | protection cl. III         |
| Shock resistance      | IK03                       |
| Net weight [kg]       | 0,28                       |
| Colour lamp           | chrome                     |
| EAN-Number            | 9010506652802              |
| Lifetime [h]          | L80 B10 50 000             |
| Energy efficiency cl. | G                          |

**LIGHT DISTRIBUTION CURVE**

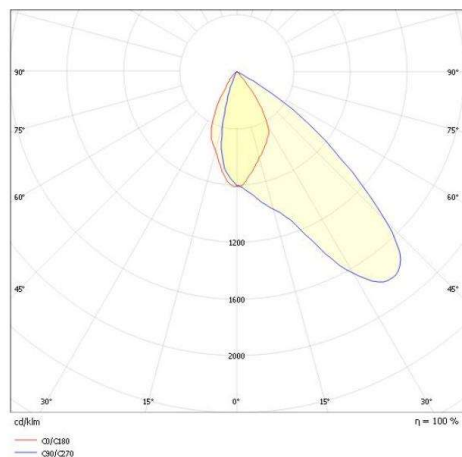

The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.