


# LASH

660-10145


LASH PD SUSPENSION made of metal, white chrome, satined PMMA opal diffuser satined white, light output direct, with converter, max. 700mA, dimmability: not dimmable, cable transparent, adapter/ceiling base white, pendant length 3000mm, IP20



## DRAWING

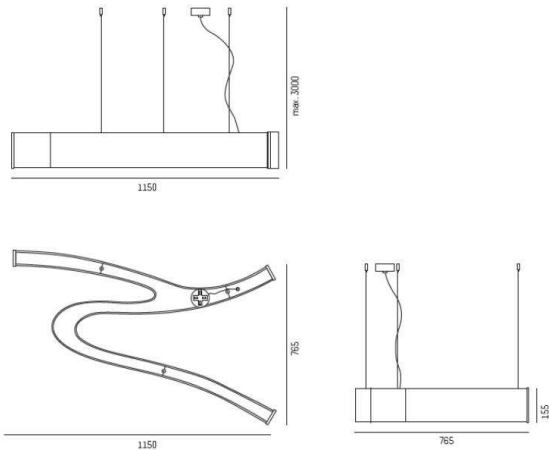

## LIGHT DISTRIBUTION CURVE

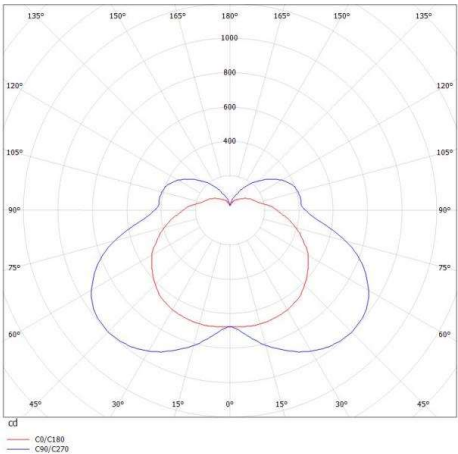

## TECHNICAL DETAILS

|                             |                    |
|-----------------------------|--------------------|
| System perform. [W]         | 48                 |
| Bulb type                   | LED                |
| Luminous flux [lm]          | 5650               |
| Current sec. [mA]           | 700                |
| Colour temp. [K]            | 4000K              |
| CRI                         | >80                |
| Optics                      | PMMA opal diffuser |
| Designer                    | Serge Cornelissen  |
| Converter                   | with converter     |
| Dimming                     | not dimmable       |
| Light output                | direct             |
| Voltage [V]                 | 220-240V 50/60Hz   |
| Material                    | metal              |
| Length [mm]                 | 1150               |
| Width [mm]                  | 765                |
| Height [mm]                 | 155                |
| Pendant length [mm]         | 3000               |
| IP protection class         | IP20               |
| Voltage class               | protection cl. I   |
| Net weight [kg]             | 8,63               |
| Colour lamp                 | white chrome       |
| Colour of glass/shade       | satined white      |
| Colour adapter/ceiling base | white              |
| Electric wire               | transparent        |
| EAN-Number                  | 9008905518485      |
| Lifetime [h]                | L80 B10 50 000     |
| Energy efficiency cl.       | D                  |



The values are rated values. Power and luminous flux are initially subject to a tolerance of +/- 10%. Colour temperature tolerance: +/- 150 K. The values apply to an ambient temperature of 25°C unless otherwise specified.