



**fluxxLED**

# Low Wattage Downlight



## Physical

**Material** ADC12 Aluminium  
**Trim finish** White, Black  
**Mounting type** Recessed  
**Tilt angle** 22°

## Electrical

**Voltage** AC 220-240, 50/60 Hz  
**Plug** 0.6m  
**Control** Non-dimmable, Triac, 1-10V, DALI

## Optical

**Beam angle** 15°, 24°, 36°, 60°  
**CCT** 2700, 3000, 4000, 5000K  
**CRI** 80, 90  
**UGR** >19  
**Efficiency** 81lm/W  
**SDCM** 3

## Certification

**Warranty** 5 years  
**Category** IP54  
**Lifetime L70B10** >50000 Hrs  
 AS/NZS 60598.2.2A

## Features



Adjustable




Dimmable



IP54

## Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimensions DxH mm	Cutout mm	Technical Drawing
F3-10D	10W	810lm	90 x 55	82-88	

# Low Wattage IP65 Downlight



Model: F3-10DIP

## Physical

**Material** ADC12 Aluminium

**Trim finish** White, Black

**Mounting type** Recessed

## Electrical

**Voltage**  
AC 220-240, 50/60 Hz

**Plug** 0.6m

**Control** Non-dimmable,  
Triac, 1-10V, DALI

## Optical

**Beam angle** 36°, 60°

**CCT** 2700, 3000, 4000,  
5000K

**CRI** 80, 90

**UGR** >19

**Efficiency** 98lm/W

**SDCM** 3

## Certification

**Warranty** 5 years

**Category** IP65

**Lifetime L70B10** >50000 Hrs  
AS/NZS 60598.2.2A

## Features



IP65



Dimmable



High Efficiency

## Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimensions DxH mm	Cutout mm	Technical Drawing
F3-10DIP	10W	980lm	90 x 49.4	75-80	
F3-13DIP	13W	1275lm	110 x 64.3	90-95	

# Thermo Downlight



Model: G7TD

## Physical

**Material** Plastic coated aluminium  
**Trim finish** White  
**Mounting type** Recessed  
**Tilt angle** 30°

## Electrical

**Voltage** AC 220-240, 50/60 Hz  
**Plug** 0.6m  
**Control** Triac

## Optical

**Beam angle** 36°, 60°  
**CCT** 2700, 3000, 4000, 5000K  
**CRI** 80, 90  
**Efficiency** 91lm/W  
**SDCM** 3

## Certification

**Warranty** 5 years  
**Category** IP40  
**Lifetime L70B10** 40000 Hrs  
 AS/NZS 60598.2.2A

## Features



Triac Dimmable



Rust-free



High Efficiency

## Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimensions DxH mm	Cutout D mm	Technical Drawing
G7TD	7W	640lm	85 x 62.5	70-75	
G10TD	10W	920lm	105 x 71.5	90-95	

# Surface Mounted Downlight



Model : F15RSM

## Physical

**Trim finish** White, Black

**Mounting type**  
Surface Mounted

## Electrical

**Voltage**  
AC 220-240, 50/60 Hz

**Control** Non-dimmable,  
Triac

## Optical

**Beam angle** 60°

**CCT** 2700, 3000, 4000,  
5000K

**CRI** 80, 90

**UGR** < 19

**Efficiency** 100lm/W

## Certification

**Warranty** 3 years

**Category** IP54  
AS/NZS 60598.2.1

## Product Specification

SKU	Wattage	Lumen Output (4000K)	Dimensions DxH mm	Technical Drawing
F15RSM	15W	1500lm	90 x 100	
F25RSM	25W	2500lm	120 x 110	
F35RSM	35W	3500lm	160 x 120	

# Adjustable Surface Mounted Downlight



Model : F2OASM

## Physical

**Trim finish** White, Black

**Mounting type**  
Surface Mounted

**Rotation/Tilt angle**  
25°/350°

## Electrical

**Voltage**  
AC 220-240, 50/60 Hz

**Control** Non-dimmable,  
Triac

## Optical

**Beam angle** 24°,  
36°, 60°

**CCT** 2700, 3000, 4000,  
5000K

**CRI** 80, 90

**UGR** < 19

**Efficiency** 100lm/W

## Certification

**Warranty** 3 years

**Category** IP20  
AS/NZS 60598.2.1

## Product Specification

SKU	Wattage	Lumen Output (4000K)	Dimensions DxH/LxWxH mm	Technical Drawing
F1OASM	10W	1000lm	90 x 110	
F2OASM	20W	2000lm	115 x 122	
F1OSSM	10W	1000lm	90 x 90 x 110	
F2OSSM	20W	2000lm	115 x 115 x 122	

# Pull-out Adjustable Downlight



Model : FCA25

## Physical

**Trim finish** White, Black

**Mounting type**  
Recessed

**Rotation/Tilt angle**  
90°/350°

## Electrical

**Voltage**  
AC 220-240, 50/60 Hz

**Control** Non-dimmable,  
Triac, Sunset dimmable,  
1-10V, DALI

## Optical

**Beam angle** 15°, 24°,  
38°

**CCT** 2700, 3000,  
3500, 4000, 5000K,  
2000-3000K Sunset dim

**CRI** 80, 90, 95 (Sunset dim)

**UGR** < 19

**Efficiency** 90lm/W

## Certification

**Warranty** 3 years

**Category** IP20  
AS/NZS 60598.2.2A

## Product Specification

SKU	Wattage	Lumen Output (4000K)	Dimensions DxH/LxWxH mm (dxh) mm	Cutout D mm (LxW mm)	Technical Drawing
FCA25	25W	2250lm	138 x 157 (82 x 123.5)	125	
FCA25-002	25W	2250lm	140 x 140 x 168 (82 x 123.5)	125 x 125	
FCA25-003	2 x 25W	4500lm	270 x 140 x 168 (82 x 123.5)	240 x 125	

# Commercial Adjustable Downlight



Model : F30CRD

## Physical

**Trim finish** White, Black

**Mounting type** Recessed

**Tilt angle** 30°

## Electrical

**Voltage**

AC 220-240, 50/60 Hz

**Control** Non-dimmable,

Triac, 1-10V, DALI.

## Optical

**Beam angle** 15°,24°,40°,60°

**CCT** 2700, 3000, 3500,

4000, 5000K

**CRI** 80, 90, DWP

**UGR** < 19

**Efficiency** 86lm/W




## Certification

**Warranty** 3 years

**Category** IP20

AS/NZS 60598.2.2A

## Product Specification

SKU	Wattage	Lumen Output (4000K)	Technical Drawing
F30CRD	30W	2600lm	
F30CSD	30W	2600lm	
F30TSD	2 x 30W	5200lm	

# Commercial Fixed Downlight



Model: F3-35SD

## Physical

**Material** ADC12 Aluminium

**Trim finish** White, Black

**Mounting type** Recessed

## Electrical

**Voltage**  
AC 220-240, 50/60 Hz

**Plug** 0.6m

**Control** Non-dimmable,  
Triac, 1-10V, DALI

## Optical

**Beam angle** 90°

**CCT** 2700K, 3 CCT Switch  
(3000, 4000, 5700K)

**CRI** 80, 90

**UGR** >19

**Efficiency** 90-100lm/W

**SDCM** 3

## Certification

**Warranty** 5 years

**Category** IP44

**Lifetime L70B10** 40000 Hrs  
AS/NZS 60598.2.2A

## Features



3 CCT Switch



IP 44



High Efficiency

## Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimensions DxH mm	Cutout D mm	Technical Drawing
F3-10SD	10W	827lm	85 x 39.5	70-75	
F3-13SD	13W	1197lm	110 x 38	90-100	
F3-18SD	18W	1771lm	145 x 45	120-130	
F3-25SD	25W	2230lm	170 x 45	140-150	
F3-35SD	35W	3500lm	228 x 45	200-210	

# Round Wallwasher Downlight



## Physical

**Trim finish** White

**Mounting type**  
Recessed

**Tilt angle** 90°

## Electrical

**Voltage**  
AC 220-240, 50/60 Hz

**Control** Non-dimmable,  
Triac, 1-10V, DALI

## Optical

**Beam angle** 24°, 60°

**CCT** 2700, 3000, 4000,  
5000K

**CRI** 80, 90

**UGR** > 19

**Efficiency** 100lm/W

## Certification

**Warranty** 3 years

**Category** IP20  
AS/NZS 60598.2.2A

## Product Specification

SKU	Wattage	Lumen Output	Dimensions DxH mm	Cutout D mm	Technical Drawing
F35RW	35W	3550lm	180 x 128.5	170	

# Square Wallwasher Downlight



## Physical

**Material** ADC12 Aluminium  
**Trim finish** White  
**Mounting type** Recessed  
**Tilt angle** 90°

## Electrical

**Voltage** AC 220-240, 50/60 Hz  
**Plug** 0.6m  
**Control** Non-dimmable, Triac, 1-10V, DALI

## Optical

**Beam angle** 110°  
**CCT** 2700, 3000, 4000, 5000K  
**CRI** 80, 90  
**UGR** >19  
**Efficiency** 119lm/W  
**SDCM** 3

## Certification

**Warranty** 5 years  
**Category** IP65  
**Lifetime L70B10** 50000 Hrs AS/NZS 60598.2.2A

## Features



Wide flood distribution




IP65



High Efficiency

## Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimensions LxWxH mm	Cutout LxW mm	Technical Drawing
F3-32W	32W	3800lm	240 x 157 x 92	225 x 127	

# Surface Mounted Spotlight



Model: F3-15TSM

## Physical

**Material** PC/ADC12 Aluminium

**Trim finish** White, Black

**Mounting type**

Surface Mounted

**Tilt/Rotation Angle**

90°/330°

## Electrical

**Voltage**

AC 220-240, 50/60 Hz

**Control** Non-dimmable,

Triac

## Optical

**Beam angle** 36°, 60°

**CCT** 2700, 3000, 4000, 5000K

**CRI** 80, 90

**UGR** <19

**Efficiency** 110lm/W

**SDCM** 3

## Certification

**Warranty** 5 years

**Category** IP20

**Lifetime L70B10** >50000 Hrs

AS/NZS 60598.2.1

## Features



Adjustable




Integrated  
Aesthetic



High Efficiency

## Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimensions DxH mm	Technical Drawing
F3-15TSM	15W	1650lm	85 x 186	
F3-25TSM	25W	2750lm	85 x 211	

# Form Tracklight



Model : F1OFT

## Physical

**Trim finish**  
White, Black, Custom colours

**Mounting type**  
Track mounted

**Rotation/Tilt angle**  
350°/90°

## Electrical

**Voltage**  
AC 220-240, 50/60 Hz

**Control**  
Switchable, Phase-cut

## Optical

**Beam angle**  
25°,36°, 25x25°, 36x36°,  
4x36°, 10x25°, 10x36°, 25x36°

**CCT**  
2700, 3000, 4000, 5000K

**CRI**  
80, 90

**UGR**  
< 19

**Efficiency**  
70lm/W


## Certification

**Warranty**  
5 years


**Category**  
IP20  
AS/NZS 60598.2.1

## Features


1 - Beam shaping lens

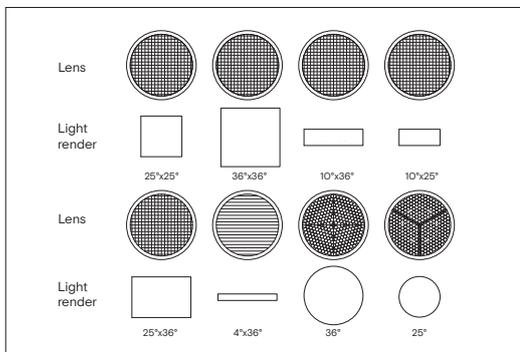

2 - Hot swappable lens

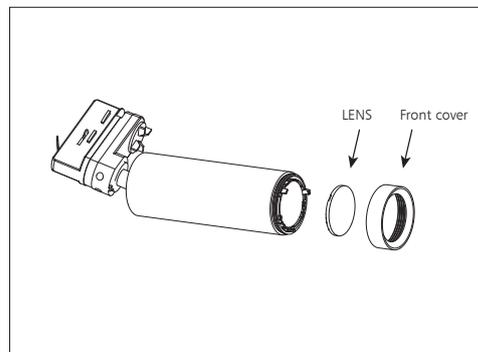

## Product Specification

SKU	Wattage	Lumen Output (4000K - 80CRI)	Dimensions A/B/C/D mm	Technical Drawing
F1OFT	10W	700lm	230/54/90/156	
<b>SKU</b>	<b>Accessories</b>			
FT-SM	Tracklight Surface Mount Kit			

# Cross Tracklight



Model : F25CT

## Physical

### Trim finish

White, Black, Custom colours

### Mounting type

Track mounted

### Rotation/Tilt angle

350°/90°

## Electrical

### Voltage

AC 220-240, 50/60 Hz

### Control

Switchable, Phase-cut

## Optical

### Beam angle

15°, 24°, 36°

### CCT

2700, 3000, 4000, 5000K

### CRI

80, 90, 97

### UGR

< 19

### Efficiency

100lm/W

## Certification

### Warranty

5 years

### Category

IP20

AS/NZS 60598.2.1

## Features


1 - Cross ventilated design for increased lifetime



2 - Aluminium construction allowing RAL and custom colours



3 - Hot swappable reflector



## Product Specification

SKU	Wattage	Lumen Output (4000K - 80CRI)	Dimensions A/B/C/D mm	Technical Drawing
F15CT	15W	1500lm	223/127/65/84.5	
F25CT	25W	2500lm	254/157/80/84.5	
F35CT	35W	3500lm	259/167/100/84.5	

SKU	Accessories
FT-SM	Tracklight Surface Mount Kit

# Beam Tracklight



Model : F25BT

## Physical

### Trim finish

White, Black, Custom colours

### Mounting type

Track mounted

### Rotation/Tilt angle

350°/90°

## Electrical

### Voltage

AC 220-240, 50/60 Hz

### Control

Switchable, Phase-cut

## Optical

### Beam angle

15°- 60°

### CCT

2700, 3000, 4000, 5000

### CRI

80, 90, 97

### UGR

< 19

### Efficiency

100lm/W

## Certification

### Warranty

5 years


### Category

IP20

AS/NZS 60598.2.1

## Features

1 - Adjustable beam angle



2 - Cross ventilated design for increased lifetime



3 - Aluminium construction allowing RAL and custom colours



## Product Specification

SKU	Wattage	Lumen Output (4000K - 80CRI)	Dimensions A/B/C/D mm	Technical Drawing
F15BT	15W	500-1500lm	234/65/137/84.5	
F25BT	25W	750-2500lm	260/80/163/84.5	
F30BT	30W	1000-3000lm	265/100/173/84.5	

SKU

Accessories

FT-SM

Tracklight Surface Mount Kit

RoHS



CE

fluxxLED

# Wallwasher Tracklight



Model : F28TRF

## Physical

**Trim finish** White, Black

### Mounting type

Track mounted, Surface mounted

### Rotation/Tilt angle

90°/350°

## Electrical

### Voltage

AC 220-240, 50/60 Hz

### Control

Non-dimmable, Triac

## Optical

**Beam angle** 85°

**CCT** 3000, 4000, 5000K

**CRI** 80, 90

**UGR** > 19

**Efficiency** 110lm/W

## Certification

**Warranty** 3 years

**Category** IP20

AS/NZS 60598.2.1

## Product Specification

SKU	Wattage	Lumen Output (4000K)	Dimensions LxWxH mm	Technical Drawing
F28TRF	28W	3080lm	204 x 75 x 250	
F38TRF	38W	4180lm	204 x 75 x 250	
F48TRF	48W	5280lm	204 x 75 x 250	

SKU	Accessories
FT-SM	Tracklight Surface Mount Kit

# 3 Circuit Track



## Physical

**Trim finish** Black, White

**Mounting type**  
Surface mounted,  
Suspended

## Electrical

**Voltage**  
AC 220-240, 50/60 Hz

## Certification

**Warranty** 3 years  
**Category** IP20


## Product Specification

SKU	Dimensions LxWxH mm	Technical Drawing
T3-3M	3000 x 31.5 x 32.5	

SKU	Accessories
T3-MI-U	Mini Connector
T3-F-U	Flexi Connector
T3-EP	Power Feed
T3-L	L connector
T3-T	T Connector
T3-X	X Connector
T3-SUS	Suspension Kit

# Eco Panel

Model: F3-60LP



## Physical

**Material** PC/Iron  
**Trim finish** White  
**Mounting type** Recessed,  
 Surface mounted, Suspended

## Electrical

**Voltage** AC 220-240, 50/60 Hz  
**Plug** 0.6m  
**Control** Non-dimmable,  
 Triac, 1-10V, DALI

## Optical

**Beam angle** 120°  
**CCT** 3000, 4000, 5000,  
 5700K  
**CRI** 80, 90  
**UGR** >19  
**Efficiency** 100lm/W  
**SDCM** 3

## Certification

**Warranty** 5 years  
**Category** IP40  
**Lifetime L70B10** 50000 Hrs  
 AS/NZS 60598.2.2A  
 AS/NZS 60598.2.1  
 TM21 on request

## Features



Value Range



IP40



Light weight for  
 easy installation

## Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimensions LxWxH mm	Cutout LxW mm	Technical Drawing
F3-16SSP	16W	1600lm	595 x 295 x 32	585 x 285	
F3-36SP	36W	3600lm	595 x 595 x 32	585 x 585	
F3-36MP	36W	3600lm	1195 x 295 x 32	1185 x 285	
F3-60LP	60W	6000lm	1195 x 595 x 32	1185 x 585	

SKU	Accessories	Panel Sizes (mm)
F3-PSUS-SS/S/M	Suspension Kit (one kit for 3 sizes)	595 x 295 / 595 x 595 / 1195 x 295
F3-PSUS-L	Suspension Kit	1195 x 595
F3-PRK-SS/S/M	Recessed Kit (one kit for 3 sizes)	595 x 295 / 595 x 595 / 1195 x 295
F3-PRK-K-L	Recessed Kit	1195 x 595
F3-PSM-SSW	Surface Mounted Kit	595 x 295
F3-PSM-SW	Surface Mounted Kit	595 x 595
F3-PSM-MW	Surface Mounted Kit	1195 x 295
F3-PSM-LW	Surface Mounted Kit	1195 x 595



# P40

## Physical

### Trim Finish

Silver (Custom colours on request)

### Mounting Type

Comes with 4m suspension

**Material** Extruded Aluminium with Opal Diffuser

## Electrical

### Voltage

24VDC

### Control (External Driver)

Non-dimmable, Triac, 1-10V, DALI

### Power Feed

4m White

## Optical

**Beam angle** 165°

**CCT** 2700, 3000, 4000, 5000, 6000K (Other CCT's on request)

**CRI** 80 (90 on request)

**UGR** >19

**Efficiency** 139-117 Lm/W

## Certification

**Warranty** 3 years


**Category** IP20

## Features

1 - Minimal Aesthetic



2 - 80% Down 20% Up



3 - Custom Colours



## Product Specification

SKU	Wattage	Lumen Output (80CRI) (Typ, 5% Tolerance)	Dimensions LxDxH mm	Technical Drawing
P40-18	18 W	2211 lm (3000K) 2388 lm (4000K)	905x42x42	
P40-25	25 W	2987 lm (3000K) 3225 lm (4000K)	1205x42x42	
P40-35	35 W	4246 lm (3000K) 4585 lm (4000K)	1505x42x42	
P40-40	40 W	5156 lm (3000K) 5568 lm (4000K)	1505x42x42	

# Batten



Model: F3-40B

## Physical

**Material** PC/Steel

**Finish** White

**Mounting type**

Surface mounted, Suspended

## Electrical

**Voltage**

AC 220-240, 50/60Hz

**Control** Non-dimmable

## Optical

**Beam angle** 120°

**CCT** 3000, 4000, 5700K  
(CCT Switch)

**CRI** 80

**Efficiency** 120 lm/W

## Certification

**Warranty** 5 years

**Category** IP40, IK08

**Lifetime L70B10** >54000 Hrs  
AS/NZS 60598.2.1

## Features



Quick Release



18mm End Knockouts



3 CCT Switch

## Product Specification

SKU	Wattage	Lumen Output (4000K)	Dimensions LxWxH mm	Technical Drawing
F3-20B	20W	2400lm	603 x 71 x 64	
F3-40B	40W	4800lm	1203 x 71 x 64	
F3-58B	58W	6960lm	1503 x 71 x 64	
F3-72B	72W	8640lm	1803 x 71 x 64	

## SKU

## Accessories

F3-BSUS

2M Suspension Kit (Pair)

# Lensed Trunking Batten



## Physical

**Material** Extruded Aluminium

**Trim finish** Aluminium Silver, White

### Mounting type

Surface mounted, Suspended

## Electrical

### Voltage

AC 220-240, 50/60 Hz

**Control** Non-dimmable, 1-10V, DALI

## Optical

**Beam angle** 30°, 60°, 90°, Asym 30°, Double Asym 30°

**CCT** 3000, 4000, 5000K

**CRI** 80, 90

**UGR** <19 except 90° beam

**Efficiency** 130lm/W

**SDCM** 3

## Certification

**Warranty** 5 years


**Category** IP20

**Lifetime L70B10** 50000 Hrs  
AS/NZS 60598.2.1  
TM21 on request

## Features



Seamless Link



Multiple Beam Angles



High Efficiency

## Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimensions LxWxH mm	Technical Drawing
G40BTL	40W	5200lm	1182 x 65 x 65	
G60BTL	60W	7800lm	1475 x 65 x 65	
G80BTL	80W	10400lm	1475 x 65 x 65	

## SKU

## Accessories

GBT-SC

Straight Connector

GBT-SUS

Suspension Kit



# Linear Highbay

Model : F240LH

## Physical

**Trim finish** White  
**Mounting type**  
 Surface mounted,  
 Suspended

## Electrical

**Voltage**  
 AC 220-240, 50/60 Hz  
**Control** Non-dimmable,  
 1-10V, DALI

## Optical

**Beam angle** 20°, 30°,  
 60°, 90°  
**CCT** 3000, 4000, 5000,  
 5700K  
**CRI** 80  
**UGR** > 19  
**Efficiency** 130lm/W

## Certification

**Warranty** 3 years  
**Category** IP20  
 AS/NZS 60598.2.1  
 TM21 report on request

## Product Specification

SKU	Wattage	Lumen Output (4000K)	Dimensions LxWxH mm	Technical Drawing	
F80LH	80W	10400lm	605 x 104 x 92		
F150LH	150W	19500lm	898 x 104 x 92		
F180LH	180W	23400lm	1192 x 104 x 92		
F240LH	240W	31200lm	1486 x 104 x 92		



# Slimline Highbay

Model : F400EH

## Physical

**Trim finish** White  
**Mounting type** Surface mounted, Suspended

## Electrical

**Voltage** AC 220-240, 50/60 Hz  
**Control** Non-dimmable, 1-10V, DALI

## Optical

**Beam angle** 30°, 90°  
**CCT** 3000, 4000, 5000, 5700K  
**CRI** 80  
**UGR** < 19  
**Efficiency** 130lm/W

## Certification

**Warranty** 3 years  
**Category** IP20  
 AS/NZS 60598.2.1  
 TM21 report on request

## Product Specification

SKU	Wattage	Lumen Output (4000K)	Dimensions LxWxH mm	Technical Drawing
F100EH	100W	13000lm	450 x 380 x 62	
F120EH	120W	15600lm	450 x 380 x 62	
F150EH	150W	19500lm	450 x 380 x 62	
F200EH	200W	26000lm	600 x 380 x 62	
F280EH	280W	36400lm	900 x 380 x 62	
F400EH	400W	52000lm	1200 x 380 x 62	

# Round Highbay



Model : F240H

## Physical

**Trim finish** Black

**Mounting type**  
Surface mounted,  
Suspended

## Electrical

**Voltage**  
AC 220-240, 50/60 Hz

**Control** Non-dimmable,  
1-10V, DALI

## Optical

**Beam angle** 120°,  
60°, 90° (optional)

**CCT** 3000, 4000, 5000,  
5700K

**CRI** 80

**UGR** > 19

**Efficiency** 130lm/W

## Certification

**Warranty** 3 years

**Category** IP65  
AS/NZS 60598.2.1

## Product Specification

SKU	Wattage	Lumen Output (4000K)	Dimensions DxH mm	Technical Drawing
F100H	100W	13000lm	280 x 167.8	
F150H	150W	19500lm	340 x 169	
F200H	200W	26000lm	400 x 182	
F240H	240W	31200lm	400 x 182	



Model : F100HGR

# Low Glare Highbay

## Physical

**Trim finish** Black  
**Mounting type**  
Surface mounted,  
Suspended

## Electrical

**Voltage**  
AC 220-240, 50/60 Hz  
**Control** Non-dimmable,  
1-10V, DALI

## Optical

**Beam angle** 45°, 90°,  
120°  
**CCT** 3000, 4000, 5000,  
6500K  
**CRI** 80  
**UGR** < 19  
**Efficiency** 120lm/W

## Certification

**Warranty** 3 years  
**Category** IP65  
AS/NZS 60598.2.1

## Product Specification

SKU	Wattage	Lumen Output (4000K)	Dimensions DxH mm	Technical Drawing
F100HGR	100W	12000lm	280 x 197	
F150HGR	150W	17400lm	324 x 197	



Model : P43

# Profile

## Physical

**Trim finish** Silver, Black, White

### Mounting type

Recessed, Surface mounted, Suspended

## Optical

**Beam angle** 120°

**UGR** > 19

## Certification

**Warranty** 3 years

**Category** IP20, IP65 (LED Strip dependent)

## Product Specification

SKU	Dimensions LxWxH mm	Technical Drawing
P02-R	2000 x 17.1 x 8	
P06	2000 x 16 x 16	
P43	2000 x 17.1 x 15	
P17-R5	2000 x 50 x 35	
P18-R3	2000 x 35 x 35	

# LED Strip 2835



Model: F3-LS283514

## Physical

**Material** Flexible PCB

**Trim finish** White

**Mounting type**  
3M Tape

## Electrical

**Voltage**  
24VDC

**Control** Non-dimmable,  
Triac, 1-10V, DALI  
DALI DT8 (Tunable White only)

## Optical

**Beam angle** 120°

**CCT** 2000, 2200, 2500,  
2700, 3000, 3500, 4000,  
5000, 6000K  
2700-6500K  
(Tunable White)

**CRI** 80, 90

**Efficiency** 130-140lm/W

**SDCM** 3

## Certification

**Warranty** 5 years  
(In Novii Specified Profile)


**Category** IP20/IP65

**Lifetime (In Novii Profile)**  
**L70B10** 35000 Hrs  
AS/NZS 60598.2.1

## Product Specification

SKU	Wattage (per m)	Lumen Output (/m, @80CRI) (2700/3000/4000/6000K)	LED Colour	LED/m	Cuttable (every mm)	Dimensions WxH mm	Length (/power feed)	Technical Drawing
F3-LS28359	9W	1146/1195/1260/1310lm	White	160	50	10 x 2	5m	
F3-LS283514	14.4W	1965/2050/2160/2245lm	White	160	50	10 x 2	5m	
F3-LS283517	17.28W	2220/2350/2430/2580lm	White	192	41.6	10 x 2	5m	
F3-LS283521	21.6W	2955/3035/3122/3235lm	White	240	33.3	10 x 2	5m	
F3-LS283518TW	18.54W	1085/2350/2400/1226lm	Tunable White	192	83.3	10 x 2	5m	

# LED Strip 2016

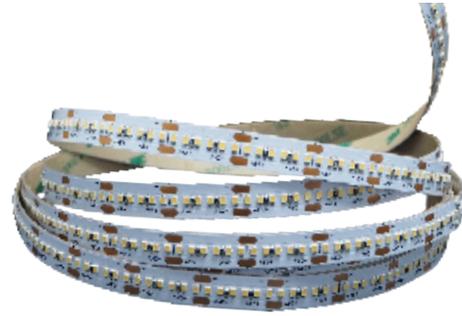

Model: F3-LS201614

## Physical

**Material** Flexible PCB

**Trim finish** White

**Mounting type**  
3M Tape

## Electrical

**Voltage**  
24VDC

**Control** Non-dimmable,  
Triac, 1-10V, DALI

## Optical

**Beam angle** 120°

**CCT** 2000, 2200, 2500,  
2700, 3000, 3500, 4000,  
5000, 6000K

**CRI** 90

**Efficiency** 70-95lm/W

**SDCM** 3

## Certification

**Warranty** 5 years  
(In Novii Specified Profile)

**Category** IP20/IP65

**Lifetime (In Novii Profile)**

**L70B10** 35000 Hrs

AS/NZS 60598.2.1

## Product Specification

SKU	Wattage (per m)	Lumen Output (/m, @90CRI) (2700/3000/4000/6000K)	LED/m	Cuttable (every mm)	Dimensions WxH mm	Length (/power feed)	Technical Drawing
F3-LS201610	10W	735/735/790/790lm	120	50	8 x 2	10m	
F3-LS201614	14.5W	982/982/1050/1050lm	180	33.4	10 x 2	10m	
F3-LS201616	16W	1123/1123/1200/1200lm	240	25	10 x 2	10m	
F3-LS201620	20W	1375/1375/1470/1470lm	300	20	10 x 2	10m	
F3-LS20168	8W	588/588/630/630lm	120	50	4 x 2	3m	
F3-LS20169	8.64W	795/795/835/835lm	140	50	5 x 2	2.5m	
F3-LS20169HD	8.64W	821/821/862/862lm	210	33.53	5 x 2	2.5m	

# LED Strip RGB



Model: F3-LS201611

## Physical

**Material** Flexible PCB

**Trim finish** White

**Mounting type**  
3M Tape

## Electrical

**Voltage**  
24VDC

**Control** DALI DT8

## Optical

**Beam angle** 120°

**CCT** RGB, RGBW (2000, 2200, 2500, 2700, 3000, 3500, 4000, 5000, 6000K)

**CRI** 80, 90

**SDCM** 3

## Certification

**Warranty** 5 years  
(In Novii Specified Profile)


**Category** IP20/IP65

**Lifetime (in Novii Profile)**  
**L70B10** 35000 Hrs  
AS/NZS 60598.2.1

## Product Specification

SKU	Wattage (per m)	Lumen Output (R/G/B-W) (/m, @80CRI)	Cuttable (every mm)	LED Colour	LED/m	Dimensions WxH mm	Length (/power feed)	Technical Drawing
F3-LS201611	11.52W	96/206/55lm	100	RGB	60	10 x 2	10 m	
F3-LS201617	17.2 W	99/242/78 - 356/356/363/369lm	100	RGBW	60	12 x 2	10 m	

# Lightbox LED

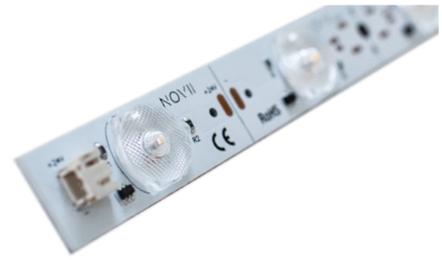

## Physical

**Material** Rigid MCPCB  
**Trim finish** White  
**Mounting type**  
 Surface mounted  
 via screw & 3M Tape

## Electrical

**Voltage**  
 24VDC  
**Control** Non-dimmable,  
 Triac, 1-10V, DALI


## Optical

**Beam angle** 120°  
**CCT** 2000, 2200, 2500,  
 2700, 3000, 3500, 4000,  
 5000, 6000K  
**CRI** 80, 90  
**Efficiency** 138lm/W  
**SDCM** 3


## Certification

**Warranty** 5 years  
**Category** IP20  
**Lifetime L70B10** 50000 Hrs  
 AS/NZS 60598.2.1

## Features



Ultra wide beam angle



Long Runs



High Efficiency

## Product Specification

SKU	Wattage (per m)	Lumen Output (/m, @80CRI) (3000K)	LED/m	Cutttable (every mm)	Dimensions LxWxH mm	Length (/power feed)	Technical Drawing
F3-LSL2	6.5W	900lm	20	50	1000 x 18 x 7.2	15m	

# Flex Tile



Model: F3-FT23TW

## Physical

**Material** Flexible PCB

**Trim finish** White

**Mounting type**

Surface mounted via screw & 3M Tape

## Electrical

**Voltage**

24VDC

**Control** Non-dimmable,

1-10V, DALI

DALI DT8 (TW, RGB, RGBW, RGBTW)

## Optical

**Beam angle** 120°

**CCT** 2000, 2200, 2500,

2700, 3000, 3500, 4000,

5000, 6000K

2700-6500K (Tunable white)

RGB, RGBW, RGBTW

**CRI** 80, 90

**Efficiency** 100lm/W

**SDCM** 3


## Certification

**Warranty** 5 years


**Category** IP20

**Lifetime L70B10** 35000 Hrs  
AS/NZS 60598.2.1

## Features



Ultra slim 40mm lightboxes



Linkable power



Cuttable sections

## Product Specification

SKU	Wattage (per m)	Lumen Output (/m, @80CRI)		LED Colour	LED/pcs	Cuttable (every mm)	Dimensions LxWxH mm	Technical Drawing
		(2700K/3000K/4000K/6000K)	(R/G/B-W)					
F3-FT12S	12W	1000/1150/1360/1300lm		White	140	240 x 25	500 x 240 x 8	
F3-FT23S	23W	1900/2000/2380/2300lm		White	288	60 x 40	480 x 240 x 8	
F3-FT23TW	23W	2000/2100/2440/2300lm		Tunable White	576	60 x 40	480 x 240 x 8	
F3-FT18RGB	18W	160/490/96lm		RGB	162	80 x 53.3	480 x 240 x 8	
F3-FT23RGBW	24W	180/510/105-700lm		RGB+ White	162	80 x 53.3	480 x 240 x 8	
F3-F26RGBTW	26W	160/490/96 - 646/680/800/752lm		RGB+ Tunable White	324	80 x 53.3	480 x 240 x 8	

# UDON 1023



## Physical

**Material** Silicone with Silicone Opal diffuser

**Mounting type** Surface mounted

**Power Feeds** Multiple types depending on application

## Electrical

**Voltage and Current** 24VDC

**Control** Non-dimmable, Triac, 1-10V, DALI

**Max Run Per Power Feed**  
10m single power feed  
20m dual power feed

## Optical

**Beam angle** 270°

**CCT** 2700, 3000, 4000, 6000K, RGB, RGB Pixel

**CRI** 80, 90 (on request)

## Certification

**Warranty** 2 years

**Category** IP65

## Features


1 - Cuttable



2 - Seamless Joinable



3 - Power Feeds



## Product Specification

SKU	Wattage (per m)	Lumen Output (per m) (2700K/3000K/4000K/6000K) (R/G/B)	Cuttable	Minimum Bend Radius	Dimensions WxH mm	Technical Drawing
FU1023	14.4 W	158/165/267/307 lm	100 mm	100 mm	10 x 23	
FU1023-RGB	14.4 W	24/52/13 lm	100 mm	100 mm	10 x 23	
FU1023-RGBP	10 W	24/52/13 lm	100 mm	100 mm	10 x 23	

## Package

Udon 1023 is sold in a 10m pack with pre-attached Power Feed Bottom and End Cap. This pack also includes multiple accessories for most applications.

SKU	SKU per package
FU1023 / FU1023-RGB / FU1023-RGBP	1 x 10 m
FU1023-EC	4
FU1023-PFL	1
FU1023-PFR	1
FU1023-PFB	1
FU1023-MC	10

1 x 20 ml of Silicone Glue included in UDON package

## Accessories

If additional accessories are required for a project please consult Novii.

SKU	Name	Technical Drawing
FU1023 / FU1023-RGB / FU1023-RGBP	UDON 1023	See Product Spec
FU1023-EC	End Caps	
FU1023-PFL	Power Feed Left	
FU1023-PFR	Power Feed Right	
FU1023-PFB	Power Feed Bottom	
FU1023-MC	Mounting Clip	
FU1023-MC-1M	Mounting Profile (1M Length)	

# UDON 1207



## Physical

**Material** Silicone with Silicone Opal diffuser

**Mounting type** Surface mounted

## Electrical

**Voltage and Current** 24VDC

**Control** Non-dimmable, Triac, 1-10V, DALI

### Max Run Per Power Feed

10m single power feed  
20m dual power feed

## Optical

**Beam angle** 160°

**CCT** 2700, 3000, 4000, 6000K

**CRI** 80, 90 (on request)

## Certification

**Warranty** 2 years

**Category** IP65

## Features

1 - Cuttable




2 - 3M VHB Tape



3 - 300 LEDs/m



## Product Specification

SKU	Wattage (per m)	Lumen Output (per m) (2700K/3000K/4000K/6000k)	Cuttable	Minimum Bend Radius	Dimensions WxH mm	Technical Drawing
FU1207	19.2 W	1100/1145/1245/1245 lm	20 mm	100 mm	12 x 7	

## Package

UDON 1207 is sold in a 10m pack with pre-attached Power Feed and End Cap. This pack also includes multiple accessories for most applications.

SKU	SKU per package
FU1207	1 x 10 m
FU1207-EC	2
FU1207-MC	10

1 x 20 ml of Silicone Glue included in UDON package

## Accessories

If additional accessories are required for a project please consult Novii.

SKU	Name	Technical Drawing
FU1207	UDON 1207	See Product Spec
FU1207-EC	Power Feed & End Cap	
FU1207-MC	Mounting Clip	

# UDON 1212



## Physical

**Material** Silicone with Silicone Opal diffuser

**Mounting type** Surface mounted

## Electrical

**Voltage and Current** 24VDC

**Control** Non-dimmable, Triac, 1-10V, DALI

### Max Run Per Power Feed

10m single power feed  
20m dual power feed

## Optical

**Beam angle** 110°

**CCT** 2700, 3000, 4000, 6000K

**CRI** 80, 90 (on request)

## Certification

**Warranty** 2 years

**Category** IP65

## Features

1 - Cuttable



2 - Light output 45° angle



3 - 300 LEDs/m



## Product Specification

SKU	Wattage (per m)	Lumen Output (per m) (2700K/3000K/4000K/6000k)	Cuttable	Minimum Bend Radius	Dimensions WxH mm	Technical Drawing
FU1212	19.2 W	989/1023/1125/1125 lm	20 mm	100 mm	12.5 x 12.5	

## Package

Udon 1212 is sold in a 10m pack with pre-attached Power Feed and End Cap. This pack also includes multiple accessories for most applications.

SKU	SKU per package
FU1212	1 x 10 m
FU1212-EC	2
FU1212-MC	10

1 x 20 ml of Silicone Glue included in UDON package

## Accessories

If additional accessories are required for a project please consult Novii.

SKU	Name	Technical Drawing
FU1212	UDON 1212	See Product Spec
FU1212-EC	Power Feed & End Cap	
FU1212-MC	Mounting Clip	

# UDON 1220



## Physical

**Material** Silicone with Silicone Opal diffuser

**Mounting type** Surface mounted

**Power Feeds** Multiple types depending on application

## Features

1 - Cuttable



## Electrical

**Voltage and Current** 24VDC

**Control** Non-dimmable, Triac, 1-10V, DALI

**Max Run Per Power Feed**  
10m single power feed  
20m dual power feed

2 - Seamless Joinable




## Optical

**Beam angle** 120°

**CCT** 2700, 3000, 4000, 6000K, RGB, RGB Pixel

**CRI** 80, 90 (on request)

3 - Power Feeds



## Certification

**Warranty** 2 years

**Category** IP65

## Product Specification

SKU	Wattage (per m)	Lumen Output (per m) (2700K/3000K/4000K/6000k) (R/G/B)	Cuttable	Minimum Bend Radius	Dimensions WxH mm	Technical Drawing
FU1220	14.4 W	196/205/282/324 lm	100 mm	100 mm	12 x 20	
FU1220-RGB	14.4 W	24/52/13 lm	100 mm	100 mm	12 x 20	
FU1220-RGBP	10 W	24/52/13 lm	100 mm	100 mm	12 x 20	

## Package

Udon 1220 is sold in a 10m pack with pre-attached Power Feed Bottom and End Cap. This pack also includes multiple accessories for most applications.

SKU	SKU per package
FU1220 / FU1220-RGB / FU1220-RGBP	1 x 10 m
FU1220-EC	4
FU1220-PFL	1
FU1220-PFR	1
FU1220-PFB	1
FU1220-MC	10

1 x 20 ml of Silicone Glue included in UDON package

## Accessories

If additional accessories are required for a project please consult Novii.

SKU	Name	Technical Drawing
FU1220 / FU1220-RGB / FU1220-RGBP	UDON 1220	See Product Spec
FU1220-EC	End Caps	
FU1220-PFL	Power Feed Left	
FU1220-PFR	Power Feed Right	
FU1220-PFB	Power Feed Bottom	
FU1220-MC	Mounting Clip	
FU1220-MC-1M	Mounting Profile (1M Length)	

# IP54 Bulkhead



Model: F3-18B275

## Physical

**Material** PC/Aluminium

**Trim finish** White

**Mounting type**  
Surface mounted

## Electrical

**Voltage**  
AC 220-240, 50/60 Hz

**Control** Non-dimmable,  
Triac, 1-10V, DALI, Sensor,  
Emergency

## Optical

**Beam angle** 120°

**CCT** 2700, 3000, 4000,  
5000, 5700K

**CRI** 80

**UGR** >19

**Efficiency** 115-120lm/W

**SDCM** 3

## Certification

**Warranty** 5 years

**Category** IP54, IK08

**Lifetime L70B10** >54000Hrs  
AS/NZS 60598.2.1  
AS/NZS 60598.2.2  
Emergency on request

## Features



Integrated  
emergency option



IP54



IK08

## Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimensions DxH mm	Technical Drawing
F3-12B275	12W	1440lm	275 x 65	
F3-18B275	18W	2160lm	275 x 65	
F3-25B275	25W	3000lm	275 x 65	
F3-25B350	25W	2875lm	350 x 65	
F3-25B350	30W	3450lm	350 x 65	

# IP65 Round Bulkhead



Model: F3-12BR275

## Physical

**Material** PC/Aluminium  
**Trim finish** White, Black  
**Mounting type**  
 Surface mounted

## Electrical

**Voltage**  
 AC 220-240, 50/60 Hz  
**Control** Non-dimmable,  
 Triac, 1-10V, DALI, Sensor,  
 Emergency

## Optical

**Beam angle** 120°  
**CCT** 2700, 3000, 4000,  
 5000, 5700K  
**CRI** 80  
**UGR** >19  
**Efficiency** 95-110lm/W  
**SDCM** 3

## Certification

**Warranty** 5 years  
**Category** IP65, IK10  
**Lifetime L70B10** >54000Hrs  
 AS/NZS 60598.2.1  
 AS/NZS 60598.2.22  
 Emergency on request

## Features



Integrated  
 emergency option



IP65



IK10

## Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimensions DxH mm	Technical Drawing
F3-12BR275	12W	1320lm	275 x 59	
F3-18BR275	18W	1710lm	275 x 59	
F3-25BR275	25W	2500lm	275 x 59	
F3-25BR350	25W	2500lm	350 x 59	
F3-30BR350	30W	2940lm	350 x 59	

# IP65 Eyelid Bulkhead



Model: F3-12BE275

## Physical

**Material** PC/Aluminium  
**Trim finish** White, Black  
**Mounting type**  
 Surface mounted

## Electrical

**Voltage**  
 AC 220-240, 50/60 Hz  
**Control** Non-dimmable,  
 Triac, 1-10V, DALI, Sensor,  
 Emergency

## Optical

**Beam angle** 120°  
**CCT** 2700, 3000, 4000,  
 5000, 5700K  
**CRI** 80  
**UGR** >19  
**Efficiency** 90lm/W  
**SDCM** 3

## Certification

**Warranty** 5 years  
**Category** IP65, IK10  
**Lifetime L70B10** >54000Hrs  
 AS/NZS 60598.2.1  
 AS/NZS 60598.2.22  
 Emergency on request

## Features



Integrated  
 emergency option



IP65



IK10

## Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimensions DxH mm	Technical Drawing
F3-12BE275	12W	1060lm	275 x 59	
F3-18BE275	18W	1620lm	275 x 59	

# IP65 Oval Bulkhead



Model: F3-12BO230

## Physical

**Material** PC/Aluminium  
**Trim finish** White, Black  
**Mounting type**  
 Surface mounted

## Electrical

**Voltage**  
 AC 220-240, 50/60 Hz  
**Control** Non-dimmable,  
 Triac, 1-10V, DALI, Sensor,  
 Emergency

## Optical

**Beam angle** 120°  
**CCT** 2700, 3000, 4000,  
 5000, 5700K  
**CRI** 80  
**UGR** >19  
**Efficiency** 95lm/W  
**SDCM** 3

## Certification

**Warranty** 5 years  
**Category** IP65, IK10  
**Lifetime L70B10** >54000Hrs  
 AS/NZS 60598.2.1  
 AS/NZS 60598.2.22  
 Emergency on request

## Features



Integrated  
 emergency option



IP65



IK10

## Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimensions LxWxH mm	Technical Drawing
F3-12BO230	12W	1140lm	320 x 230 x 60	
F3-18BO230	18W	1710lm	320 x 230 x 60	
F3-25BO230	25W	2375m	320 x 230 x 60	

# IP65 Square Bulkhead



Model: F3-12BS242

## Physical

**Material** PC/Aluminium  
**Trim finish** White, Black  
**Mounting type**  
 Surface mounted

## Electrical

**Voltage**  
 AC 220-240, 50/60 Hz  
**Control** Non-dimmable,  
 Triac, 1-10V, DALI, Sensor,  
 Emergency

## Optical

**Beam angle** 120°  
**CCT** 2700, 3000, 4000,  
 5000, 5700K  
**CRI** 80  
**UGR** >19  
**Efficiency** 90-110lm/W  
**SDCM** 3

## Certification

**Warranty** 5 years  
**Category** IP65, IK10  
**Lifetime L70B10** >54000Hrs  
 AS/NZS 60598.2.1  
 AS/NZS 60598.2.22  
 Emergency on request

## Features



Integrated  
 emergency option



IP65



IK10

## Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimensions LxWxH mm	Technical Drawing
F3-12BS242	12W	1320lm	242 x 242 x 59	
F3-18BS242	18W	1800lm	242 x 242 x 59	
F3-25BS242	25W	2250lm	242 x 242 x 59	

# Up/Down Adjustable Wall Light



Model: F3-10UDAW

## Physical

**Material** PC/Aluminium  
**Trim finish** Black  
**Mounting type** Wall Mounted

## Electrical

**Voltage** AC 220-240, 50/60 Hz  
**Control** Non-dimmable

## Optical

**Beam angle** 15°-120°  
**CCT** 2700, 3000, 4000, 5000K  
**CRI** 80 (90 on request)  
**UGR** >19  
**Efficiency** 70-94lm/W  
**SDCM** 3

## Certification

**Warranty** 5 years  
**Category** IP65  
**Lifetime L70B10** >40000 Hrs  
 AS/NZS 60598.2.1

## Features



IP65



Ajustable beam



Up/Down Distribution

## Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimensions LxWxH mm	Technical Drawing
F3-10UDAW	10W	940lm	120 x 100 x 96.8	
F3-18UDAW	18W	1260lm	242 x 100 x 97.7	

# Cove Round Wall Light



## Physical

**Material** PC/Aluminium  
**Trim finish** Black  
**Mounting type** Wall Mounted

## Electrical

**Voltage** AC 220-240, 50/60 Hz  
**Control** Non-dimmable

## Optical

**Beam angle** 120°  
**CCT** 2700, 3000, 4000, 5000K  
**CRI** 80 (90 on request)  
**UGR** >19  
**Efficiency** 81lm/W  
**SDCM** 3

## Certification

**Warranty** 5 years  
**Category** IP65, IK10  
**Lifetime L70B10** >40000 Hrs  
 AS/NZS 60598.2.1

## Features



IP65



IK10



Up/Down  
Distribution

## Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimensions LxWxH mm	Technical Drawing
F3-8CRW	8W	650lm	170 x 140 x 59	



# Cove Square Wall Light

## Physical

**Material** PC/Aluminium

**Trim finish** Black

**Mounting type** Wall Mounted

## Electrical

**Voltage**

AC 220-240, 50/60 Hz

**Control** Non-dimmable

## Optical

**Beam angle** 180°

**CCT** 2700, 3000, 4000,  
5000K

**CRI** 80 (90 on request)

**UGR** >19

**Efficiency** 70lm/W

**SDCM** 3

## Certification

**Warranty** 5 years

**Category** IP65, IK10

**Lifetime L70B10** >40000 Hrs  
AS/NZS 60598.2.1

## Features



IP65



IK10



Up/Down  
Distribution

## Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimensions LxWxH mm	Technical Drawing
F3-8CSW	8W	560lm	139 x 115 x 52	

# Veil Wall Light



Model: F3-10VW

## Physical

**Material** PC/Aluminium

**Trim finish** Black

**Mounting type** Wall Mounted

## Electrical

**Voltage**

AC 220-240, 50/60 Hz

**Control** Non-dimmable

## Optical

**Beam angle** 100°

**CCT** 2700, 3000, 4000, 5000K

**CRI** 80 (90 on request)

**UGR** >19

**Efficiency** 40lm/W

**SDCM** 3

## Certification

**Warranty** 5 years

**Category** IP54, IK08

**Lifetime L70B10** >40000 Hrs  
AS/NZS 60598.2.1

## Features



IP54



IK08



Up/Down  
Distribution

## Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimensions LxWxH mm	Technical Drawing
F3-10VW	10W	400lm	150 x 100 x 92	
F3-18VW	18W	720lm	300 x 100 x 92	

# Up/Down Wall Light



Model: F3-10UDW

## Physical

**Material** PC/Aluminium  
**Trim finish** White, Black  
**Mounting type** Wall Mounted

## Electrical

**Voltage** AC 220-240, 50/60 Hz  
**Control** Non-dimmable

## Optical

**Beam angle** 15°, 36°, 60°  
**CCT** 2700, 3000, 4000, 5000K  
**CRI** 80 (90 on request)  
**UGR** >19  
**Efficiency** 90-110lm/W  
**SDCM** 3

## Certification

**Warranty** 5 years  
**Category** IP65, IK08  
**Lifetime L70B10** >40000 Hrs  
 AS/NZS 60598.2.1


## Features



IP65



IK08



Multiple beam angles

## Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimensions DxWxH mm	Technical Drawing
F3-10UDW	10W	900lm	60 x 105 x 170	
F3-20UDW	20W	2200lm	76 x 121 x 200	
F3-27UDW	27W	3000lm	100 x 145 x 230	

# CR Flood light



Model: F3-CRF

## Physical

**Material** Glass/Aluminium  
**Trim finish** Black (RAL 9017),  
 Umbra Grey (RAL 7022)  
**Mounting type**  
 Bracket, Pole, Outrigger

## Electrical

**Voltage**  
 AC 220-240, 50/60 Hz  
**Control** Non-dimmable,  
 1-10V, DALI, Photocell

## Optical

**Beam angle** 13 options  
**CCT** 2700, 3000, 3500,  
 4000, 5700, 6500  
**CRI** 70, 80, 90  
**UGR** >19  
**Efficiency** 137 - 157 Lm  
**SDCM** 3

## Certification

**Warranty** 5 Years Standard  
 8 Years Extended  
**Category** IP66, IK08  
**Lifetime** L70 102,000 Hrs  
 L80 79,000 Hrs  
**Salt Spray** 3000 Hrs testing  
 AS/NZS 60598.2.5  
 AS/NZS 60598.1

## Features




IP66



IK08



Salt Spray testing



CLO & Extended  
Lifespans



Integrated  
Photocell option

## Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimensions HxWxD mm	Drawing
F3-CRF50	50W	6854 - 7897Lm	300 x 240 x 69	
F3-CRF100	100W	13709 - 15794Lm	335 x 295 x 71	
F3-CRF150	150W	20563 - 23691Lm	375 x 320 x 75	
F3-CRF200	200W	27418 - 31588Lm	400 x 345 x 78	
F3-CRF300	300W	41127 - 47383Lm	464 x 410 x 83	

## Mounting options



Bracket mount



Pole mount



Outrigger mount



Pole Clamp bracket

NOV 11