


Recessed Step Light

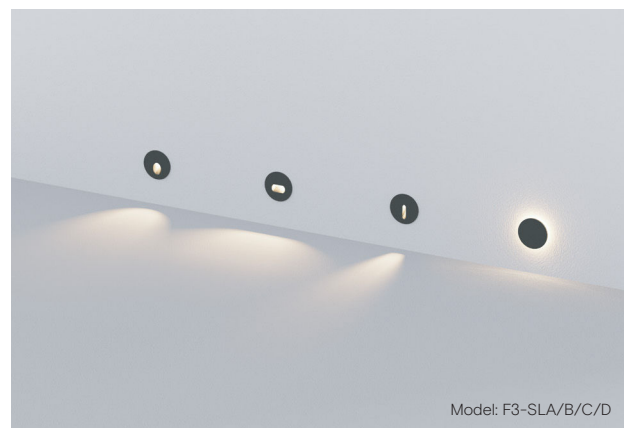

Physical

Material PC/Aluminium

Trim finish Black/White

Mounting type Wall Mounted

Electrical

Voltage

24Vdc

Control Non Dimmable,

Optical

Beam angle Asymmetric

CCT 3000, 4000,

CRI 80

Efficiency

B 15-35lm/W

W 25-65lm/W

SDCM <6

Certification

Warranty 5 years

Category IP65

Lifetime L70 50000 Hrs

Features



IP65

Product Specification

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimensions WxH mm	Technical Drawing
F3-SLA	2W	B70lm W130lm	55 x 42	
F3-SLB	2W	B65lm W120lm	55 x 42	
F3-SLC	2W	B30lm W50lm	55 x 42	
F3-SLD	2W	B50lm W90lm	55 x 50	

Accessories:

F3-SLRC

Recessing Canister

52 x 80

