

fluxxLED

education batten



Model shown: F3-31BED


Product Specification: Prismatic diffuser (<19 UGR)

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimension DxWxH mm
F3-31BED	31W	3100lm	1200 x 200 x 96
F3-36BED	36W	3600lm	1500 x 200 x 96

Product Specification: Opal diffuser (>19 UGR)

SKU	Wattage	Lumen Output (80CRI / 4000K)	Dimension DxWxH mm
F3-40BED	40W	5200lm	1200 x 200 x 96
F3-50BED	50W	6200lm	1500 x 200 x 96

Product Dimensions

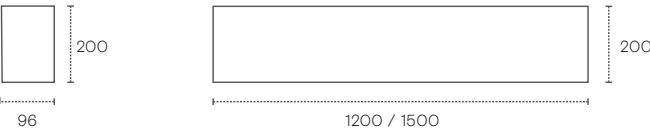

Physical

Material
PC / Steel

Finish
White

Mounting Type
Surface mounted / Suspended

Electrical

Voltage
AC 220-240, 50/60 Hz

Control
Non-dimmable / DALI

Optical

Beam Angle
80° / 120°

CCT
3000K, 4000K, 5000K

CRI
80 / 90

UGR
See product specification

Efficiency
>100lm/W

Certification

Warranty
5 years

Category
IP20 / IK06

AS/NZS 60598.1
AS/NZS 60598.2.1

